
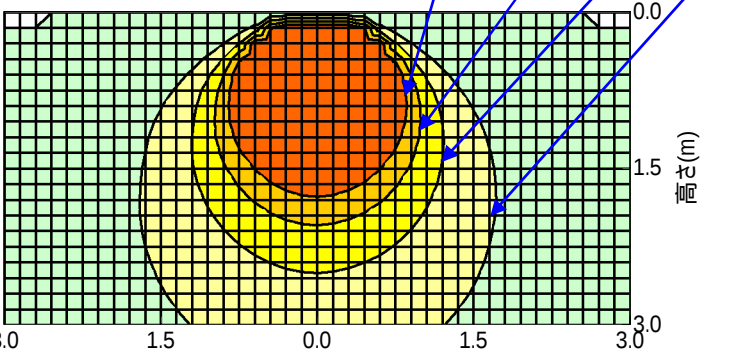
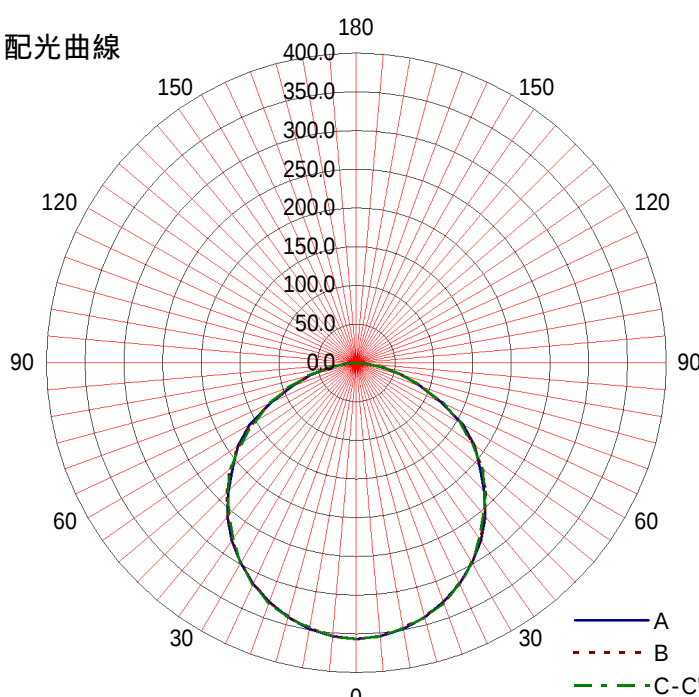


日立照明器具 照明特性

形式: TPE45401D-JZ14		天井 壁 床 室指数	80%			70%				50%			30%			0%	
<定格出力タイプ> <昼光色相当> <照度補正、連続調光共用形>			70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
			10%														0%
			照明率 S/H=1.0														
姿図 		0.6	0.59	0.47	0.39	0.57	0.46	0.39	0.34	0.45	0.38	0.34	0.44	0.38	0.33	0.32	
		0.8	0.68	0.57	0.49	0.67	0.56	0.49	0.44	0.55	0.48	0.43	0.54	0.48	0.43	0.41	
		1	0.75	0.64	0.57	0.73	0.63	0.56	0.51	0.62	0.55	0.50	0.60	0.55	0.50	0.48	
		1.25	0.81	0.71	0.64	0.79	0.70	0.63	0.58	0.68	0.62	0.58	0.67	0.61	0.57	0.55	
		1.5	0.85	0.76	0.70	0.83	0.75	0.69	0.64	0.74	0.68	0.64	0.72	0.67	0.63	0.61	
		2	0.91	0.83	0.78	0.89	0.82	0.77	0.72	0.80	0.76	0.72	0.78	0.74	0.71	0.68	
		2.5	0.94	0.88	0.83	0.92	0.87	0.82	0.78	0.85	0.80	0.77	0.83	0.79	0.76	0.73	
		3	0.96	0.91	0.86	0.95	0.90	0.85	0.82	0.87	0.84	0.80	0.85	0.82	0.79	0.77	
光源		4	0.99	0.95	0.91	0.98	0.94	0.90	0.87	0.91	0.88	0.86	0.89	0.87	0.84	0.82	
品名	LED	5	1.01	0.98	0.94	1.00	0.96	0.93	0.91	0.94	0.92	0.89	0.92	0.90	0.88	0.85	
形式		7	1.03	1.01	0.99	1.02	1.00	0.98	0.96	0.98	0.96	0.94	0.95	0.94	0.92	0.90	
光束	7,010 lm	10	1.05	1.04	1.02	1.04	1.02	1.01	0.99	1.00	0.99	0.98	0.98	0.97	0.96	0.93	

器具効率 Ft= 100.0%			単体照度分布(初期) 					
上方光束 Fu= 0.0%								
下方光束 Fd= 100.0%								
配光分類								
BZ-								
最大取付間隔			水平距離(m) A ← → B					
A-A 1.26 H								
B-B 1.26 H								
保守率	良	0.77						
	中	0.72						
	否	0.68						
光度 (cd/1000 lm)			配光曲線 					
	A-0	B-B				C-0	A'-0	C'-0
0	357	357				357		
10	349	347				348		
20	329	329				330		
30	298	298				299		
40	259	258				255		
50	208	212				212		
60	159	156				153		
70	88	91				94		
80	37	37				38		
90								
100								
110								
120								
130								
140								
150								
160								
170								
180								