

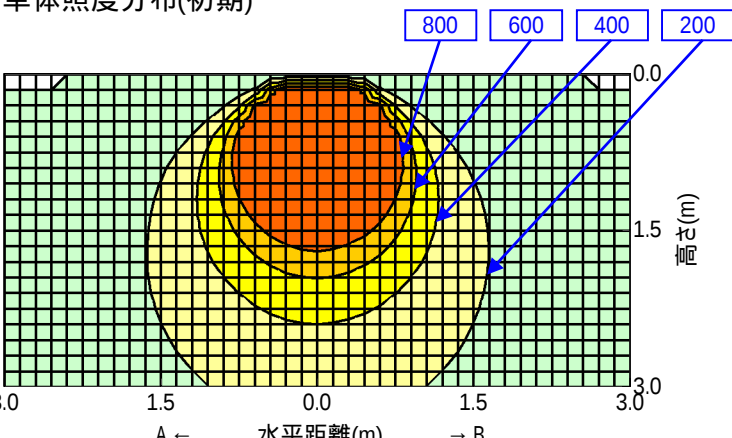
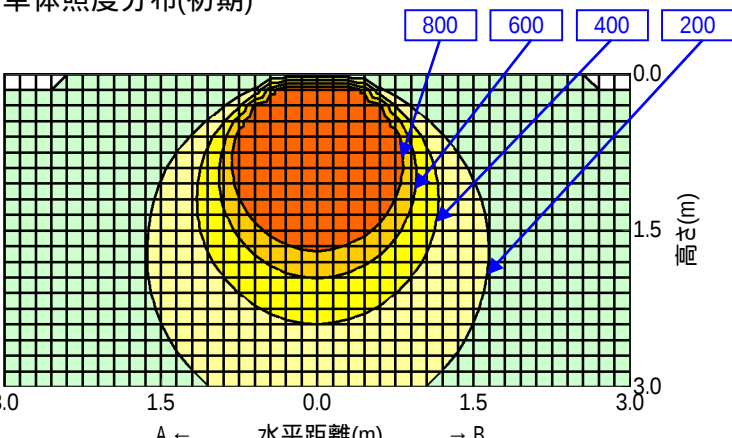


日立照明器具 照明特性

形式：TPE45401L-JZ14		天井 壁 床 室指数	80%			70%				50%			30%			0%	
<定格出力タイプ> <電球色相当> <照度補正、連続調光共用形>			70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
			10%														0%
			照明率 S/H=1.0														
姿図 		0.6	0.59	0.47	0.39	0.57	0.46	0.39	0.34	0.45	0.38	0.34	0.44	0.38	0.33	0.32	
		0.8	0.68	0.57	0.49	0.67	0.56	0.49	0.44	0.55	0.48	0.43	0.54	0.48	0.43	0.41	
		1	0.75	0.64	0.57	0.73	0.63	0.56	0.51	0.62	0.55	0.50	0.60	0.55	0.50	0.48	
		1.25	0.81	0.71	0.64	0.79	0.70	0.63	0.58	0.68	0.62	0.58	0.67	0.61	0.57	0.55	
		1.5	0.85	0.76	0.70	0.83	0.75	0.69	0.64	0.74	0.68	0.64	0.72	0.67	0.63	0.61	
		2	0.91	0.83	0.78	0.89	0.82	0.77	0.72	0.80	0.76	0.72	0.78	0.74	0.71	0.68	
		2.5	0.94	0.88	0.83	0.92	0.87	0.82	0.78	0.85	0.80	0.77	0.83	0.79	0.76	0.73	
		3	0.96	0.91	0.86	0.95	0.90	0.85	0.82	0.87	0.84	0.80	0.85	0.82	0.79	0.77	
光源		4	0.99	0.95	0.91	0.98	0.94	0.90	0.87	0.91	0.88	0.86	0.89	0.87	0.84	0.82	
品名	LED	5	1.01	0.98	0.94	1.00	0.96	0.93	0.91	0.94	0.92	0.89	0.92	0.90	0.88	0.85	
形式		7	1.03	1.01	0.99	1.02	1.00	0.98	0.96	0.98	0.96	0.94	0.95	0.94	0.92	0.90	
光束	6,440 lm	10	1.05	1.04	1.02	1.04	1.02	1.01	0.99	1.00	0.99	0.98	0.98	0.97	0.96	0.93	

器具効率 Ft= 100.0%			単体照度分布(初期) 							
上方光束 Fu= 0.0%										
下方光束 Fd= 100.0%										
配光分類										
BZ-										
最大取付間隔										
A-A		1.26						H		
B-B		1.26						H		
保守率	良	0.77								
	中	0.72								
	否	0.68								
光度 (cd/1000 lm)										
	A-0	B-B	C-0						A'-0	C'-0
0	357	357	357							
10	349	347	348							
20	329	329	330							
30	298	298	299							
40	259	258	255							
50	208	212	212							
60	159	156	153							
70	88	91	94							
80	37	37	38							
90										
100										
110										
120										
130										
140										
150										
160										
170										
180										

配光曲線

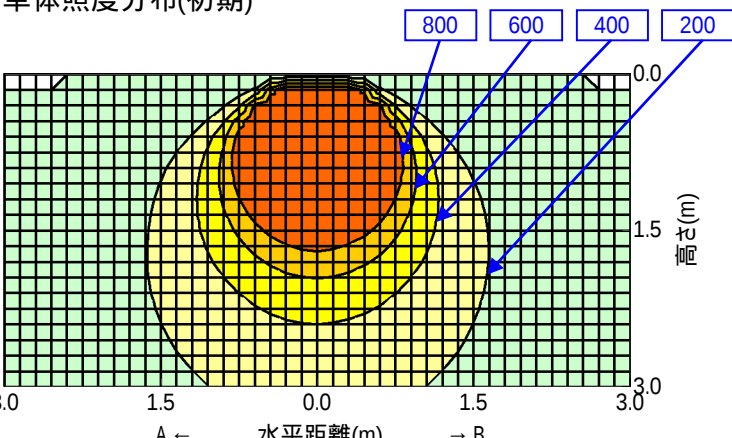