
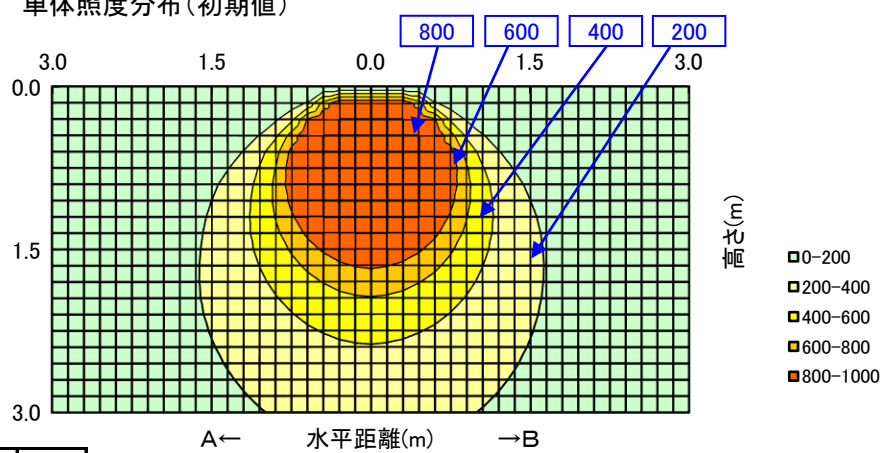


日立照明器具 照明特性

名称: 一体形LEDベース (スクエアタイプ)	反射率	天井	80%			70%				50%			30%			0%												
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%												
		床	10%														0%											
形式: TPE454AL-JZ14A	室指数	固有照明率 S/H=1.0																										
<備考>	0.6	0.59	0.47	0.39	0.57	0.46	0.39	0.34	0.45	0.38	0.34	0.44	0.38	0.33	0.32													
	0.8	0.68	0.57	0.49	0.67	0.56	0.49	0.44	0.55	0.48	0.43	0.54	0.48	0.43	0.41													
姿図 	1	0.75	0.64	0.57	0.73	0.63	0.56	0.51	0.62	0.55	0.50	0.60	0.55	0.50	0.48													
	1.25	0.81	0.71	0.64	0.79	0.70	0.63	0.58	0.68	0.62	0.58	0.67	0.61	0.57	0.55													
	1.5	0.85	0.76	0.70	0.83	0.75	0.69	0.64	0.74	0.68	0.64	0.72	0.67	0.63	0.61													
	2	0.91	0.83	0.78	0.89	0.82	0.77	0.72	0.80	0.76	0.72	0.78	0.74	0.71	0.68													
	2.5	0.94	0.88	0.83	0.92	0.87	0.82	0.78	0.85	0.80	0.77	0.83	0.79	0.76	0.73													
	3	0.96	0.91	0.86	0.95	0.90	0.85	0.82	0.87	0.84	0.80	0.85	0.82	0.79	0.77													
光源形式 -	4	0.99	0.95	0.91	0.98	0.94	0.90	0.87	0.91	0.88	0.86	0.89	0.87	0.84	0.82													
	5	1.01	0.98	0.94	1.00	0.96	0.93	0.91	0.94	0.92	0.89	0.92	0.90	0.88	0.85													
器具光束 6,320 lm	7	1.03	1.01	0.99	1.02	1.00	0.98	0.96	0.98	0.96	0.94	0.95	0.94	0.92	0.90													
	10	1.05	1.04	1.02	1.04	1.02	1.01	0.99	1.00	0.99	0.98	0.98	0.97	0.96	0.93													
器具効率 Ft= 100%		単体照度分布(初期値) 																										
上方光束 Fu= 0%																												
下方光束 Fd= 100%																												
最大取付間隔																												
A-A 1.26 H																												
B-B 1.26 H																												
保守率	良	0.81																										
	中	0.77																										
	否	0.72																										
光度 (cd/1000 lm)																												
	A-0	B-B														C-0	A'-0	C'-0										
0	357	357														357												
10	349	347														348												
20	329	329														330												
30	298	298														299												
40	259	258														255												
50	208	212														212												
60	159	156														153												
70	88	91														94												
80	37	37														38												
90																												
100																												
110																												
120																												
130																												
140																												
150																												
160																												
170																												
180																												
		配光曲線 (cd/1000 lm) 