
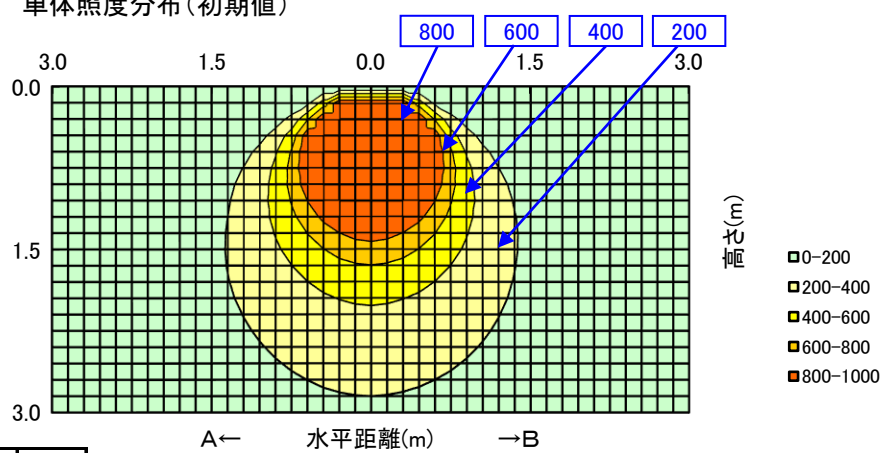
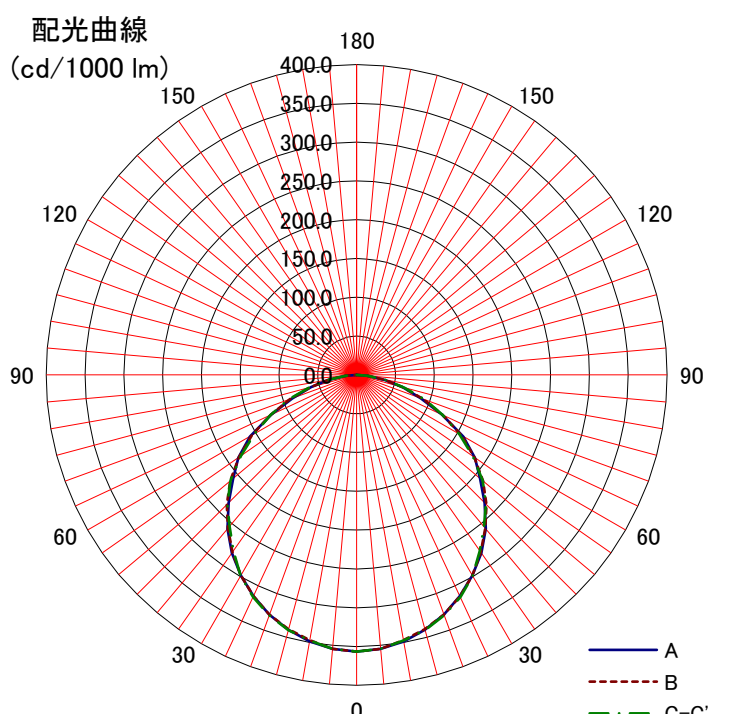


日立照明器具 照明特性

名称: 一体形LEDベース (スクエアタイプ)	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: TPE454AW-JZL14A	室指数	固有照明率 S/H=1.0														
〈備考〉	0.6	0.59	0.47	0.39	0.57	0.46	0.39	0.34	0.45	0.38	0.34	0.44	0.38	0.33	0.32	
	0.8	0.68	0.57	0.49	0.67	0.56	0.49	0.44	0.55	0.48	0.43	0.54	0.48	0.43	0.41	
姿図 	1	0.75	0.64	0.57	0.73	0.63	0.56	0.51	0.62	0.55	0.50	0.60	0.55	0.50	0.48	
	1.25	0.81	0.71	0.64	0.79	0.70	0.63	0.58	0.68	0.62	0.58	0.67	0.61	0.57	0.55	
	1.5	0.85	0.76	0.70	0.83	0.75	0.69	0.64	0.74	0.68	0.64	0.72	0.67	0.63	0.61	
	2	0.91	0.83	0.78	0.89	0.82	0.77	0.72	0.80	0.76	0.72	0.78	0.74	0.71	0.68	
	2.5	0.94	0.88	0.83	0.92	0.87	0.82	0.78	0.85	0.80	0.77	0.83	0.79	0.76	0.73	
	3	0.96	0.91	0.86	0.95	0.90	0.85	0.82	0.87	0.84	0.80	0.85	0.82	0.79	0.77	
光源形式 -	4	0.99	0.95	0.91	0.98	0.94	0.90	0.87	0.91	0.88	0.86	0.89	0.87	0.84	0.82	
	5	1.01	0.98	0.94	1.00	0.96	0.93	0.91	0.94	0.92	0.89	0.92	0.90	0.88	0.85	
器具光束 4,560 lm	7	1.03	1.01	0.99	1.02	1.00	0.98	0.96	0.98	0.96	0.94	0.95	0.94	0.92	0.90	
	10	1.05	1.04	1.02	1.04	1.02	1.01	0.99	1.00	0.99	0.98	0.98	0.97	0.96	0.93	
器具効率 Ft= 100%		単体照度分布(初期値) 														
上方光束 Fu= 0%																
下方光束 Fd= 100%																
最大取付間隔																
A-A 1.26 H																
B-B 1.26 H																
保守率	良	0.81														
	中	0.77														
	否	0.72														
光度 (cd/1000 lm)																
	A-0	B-B	C-0	A'-0	C'-0											
	0	357	357	357												
	10	349	347	348												
	20	329	329	330												
	30	298	298	299												
	40	259	258	255												
	50	208	212	212												
	60	159	156	153												
	70	88	91	94												
	80	37	37	38												
	90															
	100															
	110															
	120															
	130															
	140															
	150															
	160															
	170															
	180															
		配光曲線 (cd/1000 lm) 														
		A B C-C'														