
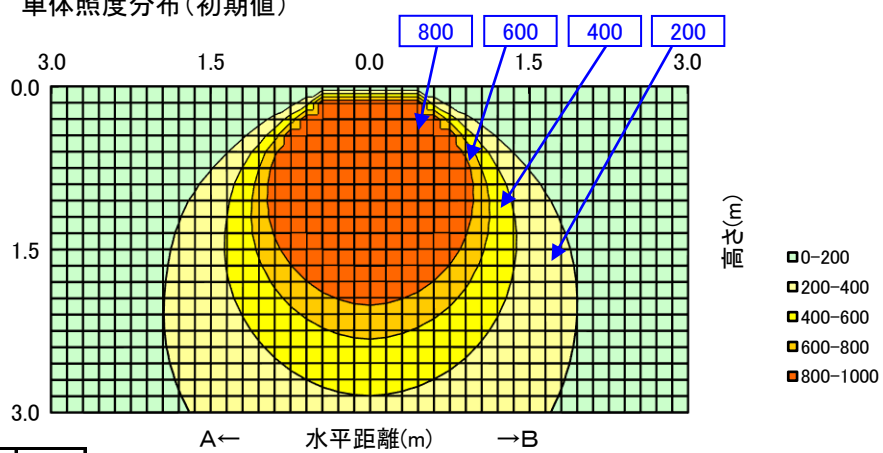
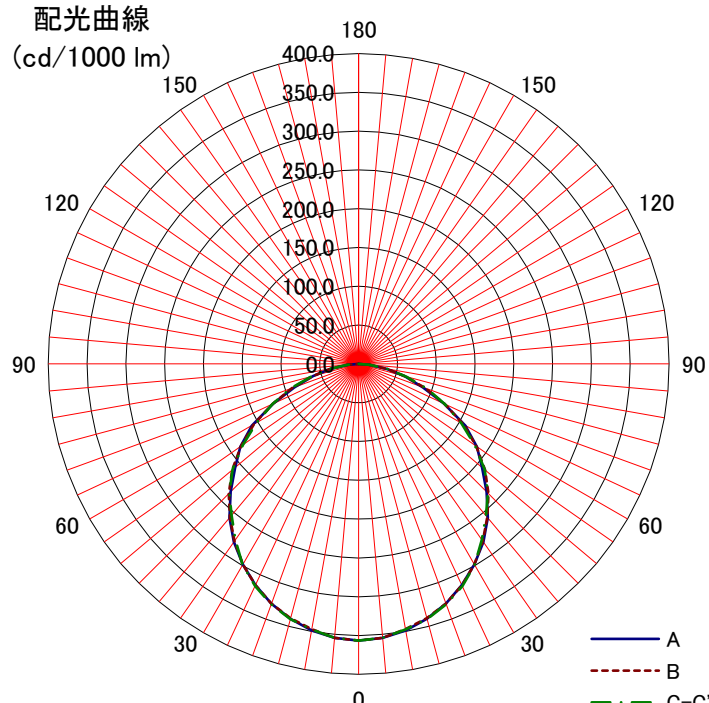


日立照明器具 照明特性

名称: 一体形LEDベース (スクエアタイプ)	反射率	天井	80%			70%				50%			30%			0%																																																																																																																							
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%																																																																																																																							
		床	10%														0%																																																																																																																						
形式: TPE454AW-JZU14A	室指数	固有照明率 S/H=1.0																																																																																																																																					
<備考>	0.6	0.59	0.47	0.39	0.57	0.46	0.39	0.34	0.45	0.38	0.34	0.44	0.38	0.33	0.32																																																																																																																								
	0.8	0.68	0.57	0.49	0.67	0.56	0.49	0.44	0.55	0.48	0.43	0.54	0.48	0.43	0.41																																																																																																																								
姿図 	1	0.75	0.64	0.57	0.73	0.63	0.56	0.51	0.62	0.55	0.50	0.60	0.55	0.50	0.48																																																																																																																								
	1.25	0.81	0.71	0.64	0.79	0.70	0.63	0.58	0.68	0.62	0.58	0.67	0.61	0.57	0.55																																																																																																																								
	1.5	0.85	0.76	0.70	0.83	0.75	0.69	0.64	0.74	0.68	0.64	0.72	0.67	0.63	0.61																																																																																																																								
	2	0.91	0.83	0.78	0.89	0.82	0.77	0.72	0.80	0.76	0.72	0.78	0.74	0.71	0.68																																																																																																																								
	2.5	0.94	0.88	0.83	0.92	0.87	0.82	0.78	0.85	0.80	0.77	0.83	0.79	0.76	0.73																																																																																																																								
	3	0.96	0.91	0.86	0.95	0.90	0.85	0.82	0.87	0.84	0.80	0.85	0.82	0.79	0.77																																																																																																																								
光源形式	4	0.99	0.95	0.91	0.98	0.94	0.90	0.87	0.91	0.88	0.86	0.89	0.87	0.84	0.82																																																																																																																								
器具光束 9,110 lm	5	1.01	0.98	0.94	1.00	0.96	0.93	0.91	0.94	0.92	0.89	0.92	0.90	0.88	0.85																																																																																																																								
	7	1.03	1.01	0.99	1.02	1.00	0.98	0.96	0.98	0.96	0.94	0.95	0.94	0.92	0.90																																																																																																																								
	10	1.05	1.04	1.02	1.04	1.02	1.01	0.99	1.00	0.99	0.98	0.98	0.97	0.96	0.93																																																																																																																								
器具効率 Ft= 100%		単体照度分布(初期値) 																																																																																																																																					
上方光束 Fu= 0%																																																																																																																																							
下方光束 Fd= 100%																																																																																																																																							
最大取付間隔		光度 (cd/1000 lm) <table><tr><td></td><td>A-0</td><td>B-B</td><td>C-0</td><td>A'-0</td><td>C'-0</td></tr><tr><td>0</td><td>357</td><td>357</td><td>357</td><td></td><td></td></tr><tr><td>10</td><td>349</td><td>347</td><td>348</td><td></td><td></td></tr><tr><td>20</td><td>329</td><td>329</td><td>330</td><td></td><td></td></tr><tr><td>30</td><td>298</td><td>298</td><td>299</td><td></td><td></td></tr><tr><td>40</td><td>259</td><td>258</td><td>255</td><td></td><td></td></tr><tr><td>50</td><td>208</td><td>212</td><td>212</td><td></td><td></td></tr><tr><td>60</td><td>159</td><td>156</td><td>153</td><td></td><td></td></tr><tr><td>70</td><td>88</td><td>91</td><td>94</td><td></td><td></td></tr><tr><td>80</td><td>37</td><td>37</td><td>38</td><td></td><td></td></tr><tr><td>90</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>100</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>110</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>120</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>130</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>140</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>150</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>160</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>170</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>180</td><td></td><td></td><td></td><td></td><td></td></tr></table>															A-0	B-B	C-0	A'-0	C'-0	0	357	357	357			10	349	347	348			20	329	329	330			30	298	298	299			40	259	258	255			50	208	212	212			60	159	156	153			70	88	91	94			80	37	37	38			90						100						110						120						130						140						150						160						170						180					
	A-0															B-B	C-0	A'-0	C'-0																																																																																																																				
0	357															357	357																																																																																																																						
10	349															347	348																																																																																																																						
20	329	329	330																																																																																																																																				
30	298	298	299																																																																																																																																				
40	259	258	255																																																																																																																																				
50	208	212	212																																																																																																																																				
60	159	156	153																																																																																																																																				
70	88	91	94																																																																																																																																				
80	37	37	38																																																																																																																																				
90																																																																																																																																							
100																																																																																																																																							
110																																																																																																																																							
120																																																																																																																																							
130																																																																																																																																							
140																																																																																																																																							
150																																																																																																																																							
160																																																																																																																																							
170																																																																																																																																							
180																																																																																																																																							
保守率		配光曲線 (cd/1000 lm) 																																																																																																																																					
良																																																																																																																																							
中																																																																																																																																							
否																																																																																																																																							