


日立照明器具 照明特性

形式：VP1195-G		反 射 率	天井	80%			70%				50%			30%			0%		
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
			床	10%															0%
			室指数	照明率 S/H=1.0															
姿図 		0.6	0.32	0.24	0.19	0.30	0.23	0.19	0.16	0.22	0.18	0.15	0.20	0.17	0.14	0.12			
		0.8	0.37	0.30	0.25	0.36	0.29	0.24	0.21	0.27	0.23	0.20	0.25	0.22	0.19	0.17			
		1	0.41	0.34	0.29	0.39	0.33	0.28	0.24	0.31	0.26	0.23	0.28	0.25	0.22	0.20			
		1.25	0.44	0.38	0.33	0.42	0.37	0.32	0.28	0.34	0.30	0.27	0.32	0.29	0.26	0.23			
		1.5	0.47	0.41	0.36	0.45	0.40	0.35	0.32	0.37	0.33	0.30	0.34	0.31	0.29	0.26			
		2	0.50	0.45	0.41	0.48	0.44	0.40	0.37	0.41	0.38	0.35	0.38	0.35	0.33	0.30			
		2.5	0.52	0.48	0.44	0.51	0.46	0.43	0.40	0.43	0.40	0.38	0.41	0.38	0.36	0.32			
		3	0.54	0.50	0.47	0.52	0.48	0.45	0.42	0.45	0.43	0.40	0.42	0.40	0.38	0.34			
光源		4	0.56	0.53	0.50	0.54	0.51	0.48	0.46	0.48	0.46	0.43	0.45	0.43	0.41	0.37			
品名	蛍光ランプ	5	0.57	0.55	0.52	0.55	0.53	0.51	0.48	0.50	0.48	0.46	0.46	0.45	0.43	0.39			
形式	FL10W	7	0.59	0.57	0.55	0.57	0.55	0.53	0.52	0.52	0.50	0.49	0.49	0.47	0.46	0.42			
光束	490 lm	10	0.60	0.59	0.57	0.58	0.57	0.56	0.54	0.54	0.53	0.52	0.50	0.50	0.49	0.44			

器具効率 Ft= 60.5%		
上方光束 Fu= 10.3%		
下方光束 Fd= 50.2%		
配光分類		
BZ-		
最大取付間隔		
A-A		1.46 H
B-B		1.28 H
保守率	良	0.70
	中	0.66
	否	0.62
光度 (cd/1000 lm)		
	A-0	B-B
0	132	132
10	132	129
20	131	125
30	128	113
40	122	100
50	111	80
60	97	60
70	81	36
80	64	18
90	54	33
100	45	26
110	39	21
120	34	18
130	27	4
140	18	8
150	10	10
160	6	
170		
180		

単体照度分布(初期)

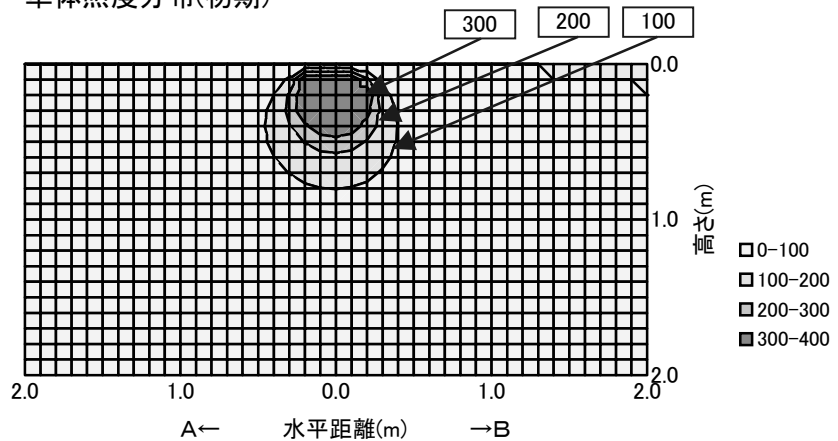

配光曲線

