

日立照明器具 照明特性

形式: VP2195B-DH		天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													0%
		室指数	照明率 S/H=1.0													
姿図 	光源	0.6	0.32	0.24	0.19	0.30	0.23	0.19	0.16	0.22	0.18	0.15	0.20	0.17	0.14	0.12
		0.8	0.37	0.30	0.25	0.36	0.29	0.24	0.21	0.27	0.23	0.20	0.25	0.22	0.19	0.17
		1	0.41	0.34	0.29	0.39	0.33	0.28	0.24	0.31	0.26	0.23	0.28	0.25	0.22	0.20
		1.25	0.44	0.38	0.33	0.42	0.37	0.32	0.28	0.34	0.30	0.27	0.32	0.29	0.26	0.23
		1.5	0.47	0.41	0.36	0.45	0.40	0.35	0.32	0.37	0.33	0.30	0.34	0.31	0.29	0.26
		2	0.50	0.45	0.41	0.48	0.44	0.40	0.37	0.41	0.38	0.35	0.38	0.35	0.33	0.30
		2.5	0.52	0.48	0.44	0.51	0.46	0.43	0.40	0.43	0.40	0.38	0.41	0.38	0.36	0.32
		3	0.54	0.50	0.47	0.52	0.48	0.45	0.42	0.45	0.43	0.40	0.42	0.40	0.38	0.34
		4	0.56	0.53	0.50	0.54	0.51	0.48	0.46	0.48	0.46	0.43	0.45	0.43	0.41	0.37
		5	0.57	0.55	0.52	0.55	0.53	0.51	0.48	0.50	0.48	0.46	0.46	0.45	0.43	0.39
品名	蛍光ランプ	7	0.59	0.57	0.55	0.57	0.55	0.53	0.52	0.52	0.50	0.49	0.49	0.47	0.46	0.42
形式	FL20SSW/18	10	0.60	0.59	0.57	0.58	0.57	0.56	0.54	0.54	0.53	0.52	0.50	0.50	0.49	0.44
光束	1,230 lm															

器具効率 $F_t = 60.5\%$

上方光束 $F_u = 10.3\%$

下方光束 $F_d = 50.2\%$

配光分類

BZ-

最大取付間隔

A-A 1.46 H

B-B 1.28 H

保守率


良
中
否

0.70
0.66
0.62

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	132	132	132
10	132	129	130
20	131	125	127
30	128	113	120
40	122	100	112
50	111	80	98
60	97	60	80
70	81	36	63
80	64	18	46
90	54		33
100	45		26
110	39		21
120	34		18
130	27	4	14
140	18		8
150	10		10
160	6		
170			
180			

単体照度分布(初期)

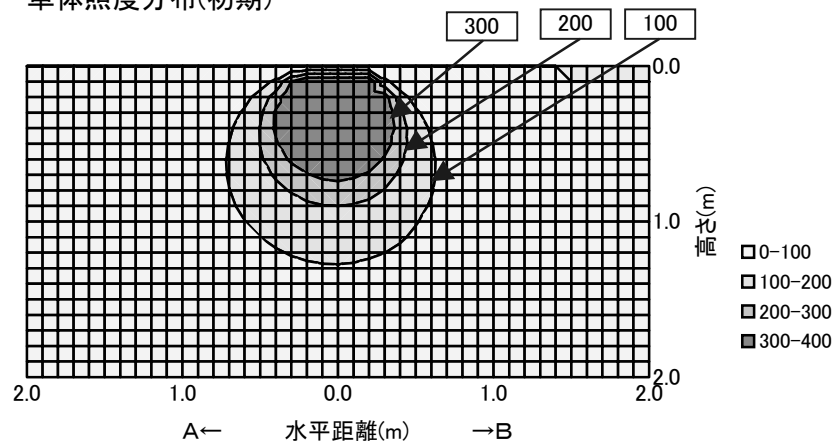

配光曲線

