



日立照明器具 照明特性

名称: 高天井用LEDランプ (アームタイプ)	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
形式: WBME1101MN		床	10%													0%
<備考>	室指数	固有照明率 S/H=1.0														
姿図 	0.6	0.63	0.52	0.45	0.62	0.51	0.45	0.40	0.50	0.44	0.40	0.49	0.44	0.40	0.38	
	0.8	0.73	0.63	0.56	0.72	0.62	0.56	0.51	0.61	0.55	0.51	0.60	0.55	0.51	0.49	
	1	0.79	0.70	0.64	0.78	0.70	0.63	0.59	0.68	0.63	0.58	0.67	0.62	0.58	0.56	
	1.25	0.85	0.77	0.71	0.84	0.76	0.71	0.66	0.75	0.70	0.66	0.73	0.69	0.65	0.63	
	1.5	0.89	0.82	0.77	0.88	0.81	0.76	0.72	0.80	0.75	0.71	0.78	0.74	0.71	0.69	
	2	0.94	0.89	0.84	0.93	0.88	0.83	0.80	0.86	0.82	0.79	0.84	0.81	0.78	0.76	
	2.5	0.97	0.92	0.88	0.96	0.91	0.87	0.84	0.89	0.86	0.83	0.87	0.85	0.82	0.80	
光源形式	4	1.01	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.92	0.90	0.93	0.91	0.89	0.86	
	5	1.03	1.00	0.98	1.02	0.99	0.97	0.95	0.97	0.95	0.93	0.95	0.93	0.92	0.89	
器具光束 11,600 lm	7	1.05	1.03	1.01	1.04	1.02	1.00	0.99	1.00	0.98	0.97	0.98	0.97	0.96	0.93	
	10	1.06	1.05	1.04	1.05	1.04	1.03	1.02	1.02	1.01	1.00	1.00	0.99	0.99	0.96	

器具効率 Ft=	100%	
上方光束 Fu=	0%	
下方光束 Fd=	100%	
最大取付間隔		
A-A	1.44 H	
B-B	H	
保守率	良	0.81
	中	0.79
	否	0.75

単体照度分布 (初期値)

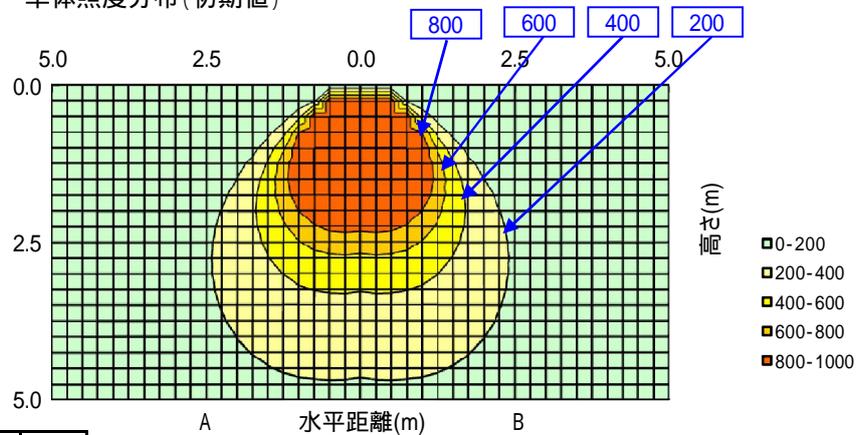

光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	371				
10	392				
20	402				
30	376				
40	315				
50	224				
60	110				
70	41				
80	5				
90					
100					
110					
120					
130					
140					
150					
160					
170					
180					

配光曲線 (cd/1000 lm)

