
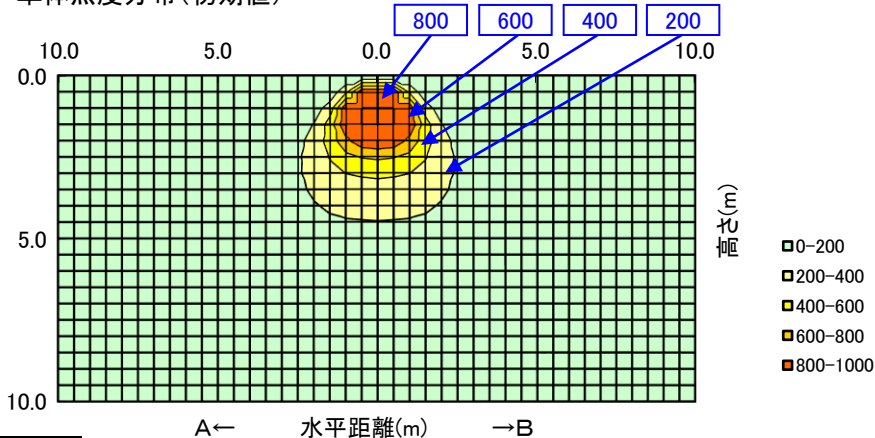
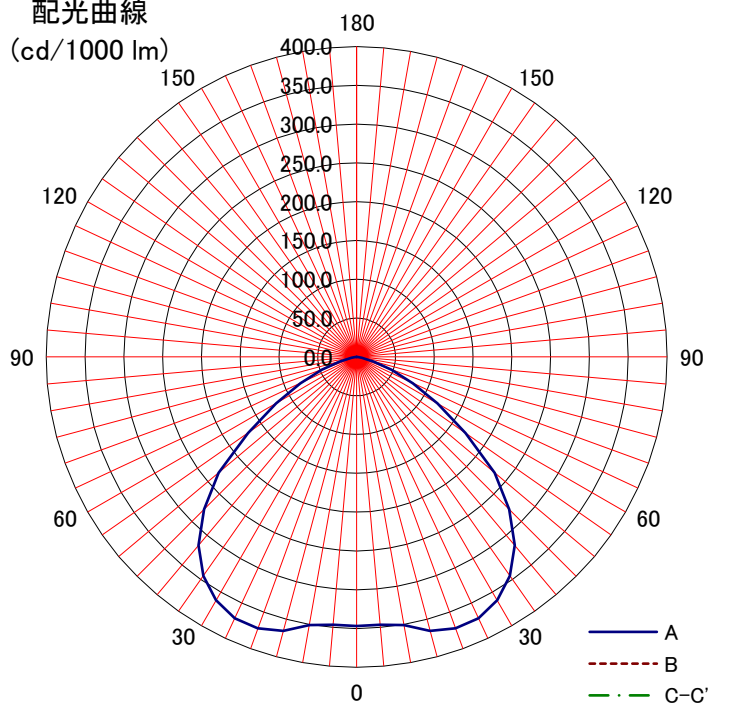


日立照明器具 照明特性

名称: 高天井用LEDランプ (アームタイプ)	反射率	天井	80%			70%				50%			30%			0%		
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
		床	10%														0%	
形式: WBME11BMNC1	室指数	固有照明率 S/H=1.0																
＜備考＞	0.6	0.61	0.50	0.43	0.60	0.50	0.43	0.38	0.49	0.42	0.38	0.48	0.42	0.38	0.36			
	0.8	0.72	0.61	0.54	0.70	0.61	0.54	0.49	0.59	0.53	0.49	0.58	0.53	0.48	0.47			
姿図 	1	0.78	0.69	0.62	0.77	0.68	0.62	0.57	0.67	0.61	0.56	0.65	0.60	0.56	0.54			
	1.25	0.84	0.76	0.69	0.83	0.75	0.69	0.64	0.73	0.68	0.64	0.72	0.67	0.63	0.61			
	1.5	0.88	0.81	0.75	0.87	0.80	0.75	0.70	0.78	0.74	0.70	0.77	0.73	0.69	0.67			
	2	0.94	0.88	0.83	0.92	0.87	0.82	0.78	0.85	0.81	0.77	0.83	0.80	0.77	0.74			
	2.5	0.96	0.91	0.87	0.95	0.90	0.86	0.83	0.88	0.85	0.82	0.87	0.84	0.81	0.79			
	3	0.98	0.94	0.90	0.97	0.93	0.89	0.86	0.91	0.88	0.85	0.89	0.86	0.84	0.82			
	4	1.01	0.97	0.94	0.99	0.96	0.93	0.91	0.94	0.92	0.89	0.92	0.90	0.88	0.86			
光源形式 -	5	1.03	1.00	0.97	1.01	0.99	0.96	0.94	0.96	0.94	0.93	0.94	0.93	0.91	0.89			
器具光束 11,500 lm	7	1.05	1.03	1.01	1.03	1.02	1.00	0.98	0.99	0.98	0.97	0.97	0.96	0.95	0.92			
	10	1.06	1.05	1.04	1.05	1.04	1.03	1.02	1.02	1.01	1.00	1.00	0.99	0.98	0.95			
器具効率 Ft= 100%		単体照度分布(初期値) 																
上方光束 Fu= 0%																		
下方光束 Fd= 100%																		
最大取付間隔		配光曲線 (cd/1000 lm) 																
A-A 1.50 H																		
B-B H																		
保守率																		
良	0.81																	
中	0.79																	
否	0.75																	
光度 (cd/1000 lm)																		
A-0	B-B															C-0	A'-0	C'-0
0	347																	
10	351																	
20	372																	
30	362																	
40	317																	
50	232																	
60	120																	
70	48																	
80	7																	
90																		
100																		
110																		
120																		
130																		
140																		
150																		
160																		
170																		
180																		