
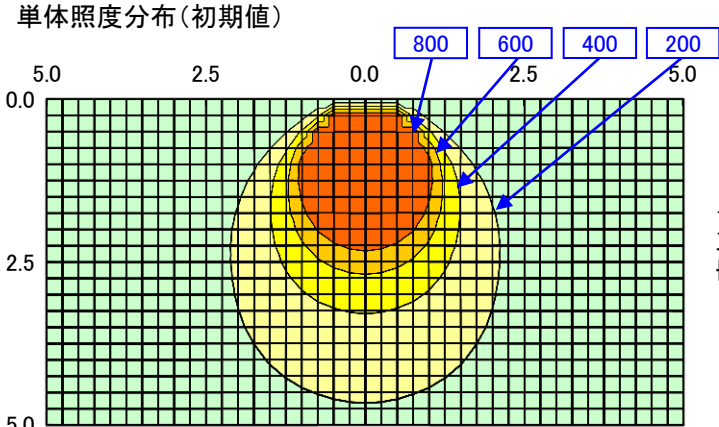
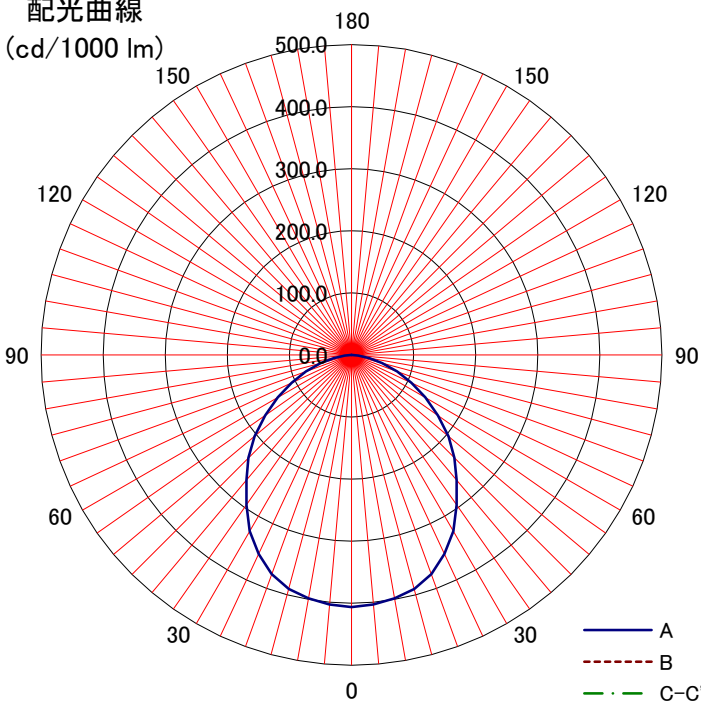


日立照明器具 照明特性

名称: 高天井用LEDラング (アームタイプ)	反射率	天井	80%			70%				50%			30%			0%	
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
		床	10%														0%
形式: WBMEP1101MNC	室指数	固有照明率 S/H=1.0															
<備考>	0.6	0.61	0.50	0.42	0.60	0.49	0.42	0.37	0.48	0.42	0.37	0.47	0.41	0.37	0.35		
	0.8	0.71	0.60	0.53	0.69	0.59	0.52	0.47	0.58	0.52	0.47	0.57	0.51	0.47	0.45		
	姿図	1	0.77	0.67	0.60	0.75	0.66	0.59	0.54	0.65	0.59	0.54	0.63	0.58	0.54	0.52	
	1.25	0.83	0.74	0.67	0.81	0.73	0.66	0.61	0.71	0.65	0.61	0.69	0.65	0.61	0.58		
	1.5	0.87	0.79	0.73	0.85	0.78	0.72	0.67	0.76	0.71	0.67	0.74	0.70	0.66	0.64		
	2	0.92	0.86	0.80	0.91	0.84	0.79	0.75	0.83	0.78	0.74	0.81	0.77	0.74	0.71		
	2.5	0.95	0.90	0.85	0.94	0.88	0.84	0.80	0.86	0.83	0.79	0.84	0.81	0.78	0.76		
	3	0.97	0.92	0.88	0.96	0.91	0.87	0.84	0.89	0.86	0.83	0.87	0.84	0.82	0.79		
光源形式 —	4	1.00	0.96	0.93	0.99	0.95	0.92	0.89	0.93	0.90	0.87	0.91	0.88	0.86	0.84		
	5	1.02	0.99	0.96	1.00	0.97	0.95	0.92	0.95	0.93	0.91	0.93	0.91	0.89	0.87		
器具光束 10,700 lm	7	1.04	1.02	1.00	1.03	1.01	0.99	0.97	0.98	0.97	0.95	0.96	0.95	0.94	0.91		
	10	1.06	1.04	1.03	1.05	1.03	1.02	1.01	1.01	1.00	0.99	0.99	0.98	0.97	0.94		
器具効率 Ft= 100%		単体照度分布(初期値)  0-200 200-400 400-600 600-800 800-1000															
上方光束 Fu= 0%																	
下方光束 Fd= 100%																	
最大取付間隔		配光曲線 (cd/1000 lm)  A B C-C'															
A-A 1.20 H																	
B-B H																	
保守率																	
良	0.81																
中	0.79																
否	0.75																
光度 (cd/1000 lm)																	
	A-0	B-B	C-0	A'-0	C'-0												
0	406																
10	398																
20	376																
30	328																
40	263																
50	204																
60	137																
70	78																
80	29																
90																	
100																	
110																	
120																	
130																	
140																	
150																	
160																	
170																	
180																	