
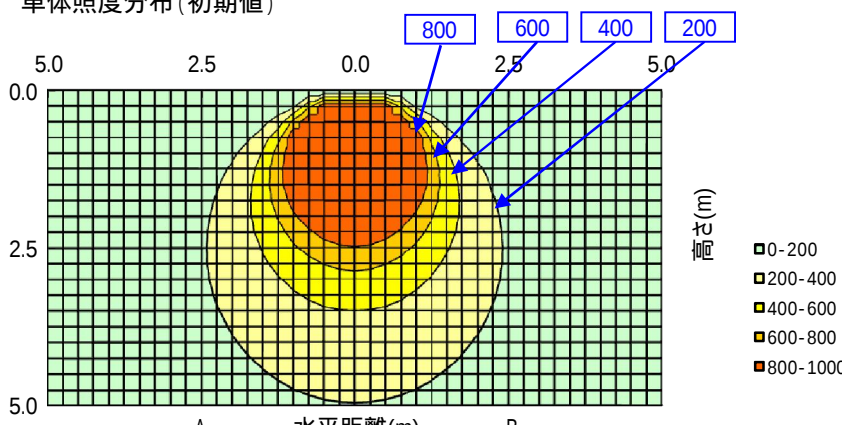
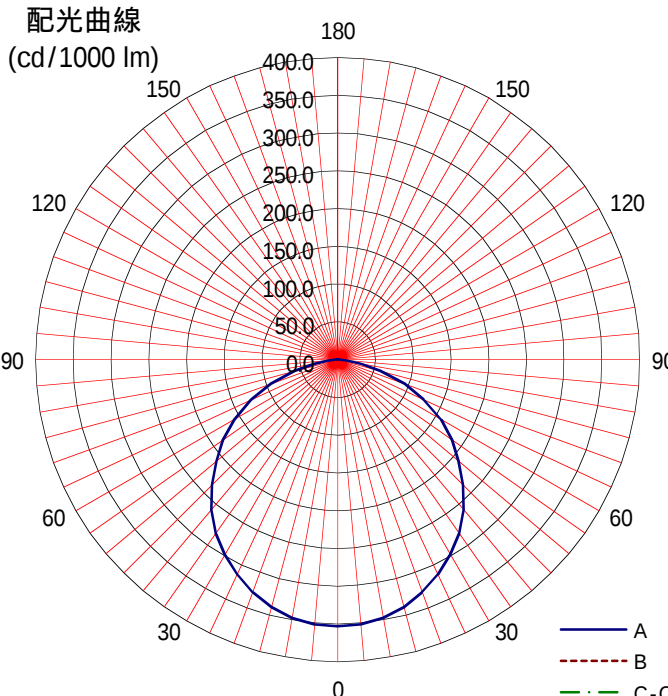


日立照明器具 照明特性

名称: 高天井用LEDラング (アームタイプ)	反射率	天井	80%			70%				50%			30%			0%	
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
		床	10%														0%
形式: WBMEP1601MN	室指数	固有照明率 S/H=1.0															
<備考> 拡散カバー 防湿・防雨形	0.6	0.59	0.47	0.39	0.57	0.46	0.39	0.34	0.45	0.38	0.33	0.44	0.38	0.33	0.31		
	0.8	0.68	0.57	0.49	0.67	0.56	0.49	0.44	0.55	0.48	0.43	0.54	0.48	0.43	0.41		
姿図 	1	0.75	0.64	0.57	0.73	0.63	0.56	0.51	0.62	0.55	0.50	0.60	0.55	0.50	0.48		
	1.25	0.81	0.71	0.64	0.79	0.70	0.63	0.58	0.68	0.62	0.58	0.67	0.62	0.57	0.55		
	1.5	0.85	0.76	0.70	0.83	0.76	0.69	0.64	0.74	0.68	0.64	0.72	0.67	0.63	0.61		
	2	0.91	0.84	0.78	0.89	0.83	0.77	0.73	0.81	0.76	0.72	0.79	0.75	0.71	0.69		
	2.5	0.94	0.88	0.83	0.92	0.87	0.82	0.78	0.85	0.81	0.77	0.83	0.79	0.76	0.74		
	3	0.96	0.91	0.86	0.95	0.90	0.86	0.82	0.88	0.84	0.81	0.86	0.82	0.80	0.77		
光源形式 -	4	0.99	0.95	0.91	0.98	0.94	0.90	0.87	0.92	0.89	0.86	0.89	0.87	0.85	0.82		
	5	1.01	0.98	0.95	1.00	0.97	0.94	0.91	0.94	0.92	0.89	0.92	0.90	0.88	0.85		
器具光束 13,900 lm	7	1.03	1.01	0.99	1.02	1.00	0.98	0.96	0.98	0.96	0.94	0.95	0.94	0.93	0.90		
	10	1.05	1.04	1.02	1.04	1.02	1.01	1.00	1.00	0.99	0.98	0.98	0.97	0.96	0.93		
器具効率 Ft= 100%		単体照度分布 (初期値) 															
上方光束 Fu= 0%																	
下方光束 Fd= 100%																	
最大取付間隔																	
A-A 1.26 H																	
B-B H																	
保守率	良																0.81
	中																0.79
	否																0.75
光度 (cd/1000 lm)		配光曲線 (cd/1000 lm) 															
	A-0	B-B	C-0	A'-0	C'-0												
0	353																
10	347																
20	328																
30	298																
40	260																
50	210																
60	158																
70	94																
80	31																
90	1																
100																	
110																	
120																	
130																	
140																	
150																	
160																	
170																	
180																	