

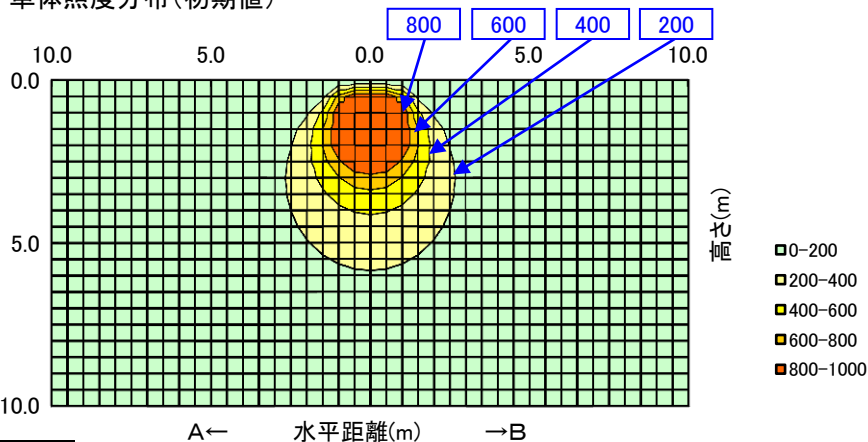


日立照明器具 照明特性

名称: 高天井用LEDランプ (アームタイプ)	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: WBMEP1601MNC	室指数	固有照明率 S/H=1.0														
＜備考＞	0.6	0.61	0.49	0.42	0.60	0.49	0.42	0.37	0.48	0.41	0.37	0.47	0.41	0.37	0.35	
	0.8	0.70	0.60	0.52	0.69	0.59	0.52	0.47	0.58	0.51	0.47	0.57	0.51	0.47	0.45	
姿図 	1	0.77	0.67	0.60	0.75	0.66	0.59	0.54	0.65	0.59	0.54	0.63	0.58	0.53	0.51	
	1.25	0.82	0.74	0.67	0.81	0.73	0.66	0.61	0.71	0.65	0.61	0.69	0.64	0.60	0.58	
	1.5	0.87	0.79	0.72	0.85	0.78	0.72	0.67	0.76	0.71	0.67	0.74	0.70	0.66	0.64	
	2	0.92	0.85	0.80	0.91	0.84	0.79	0.75	0.82	0.78	0.74	0.81	0.77	0.74	0.71	
	2.5	0.95	0.89	0.85	0.94	0.88	0.84	0.80	0.86	0.83	0.79	0.84	0.81	0.78	0.76	
	3	0.97	0.92	0.88	0.96	0.91	0.87	0.84	0.89	0.86	0.83	0.87	0.84	0.82	0.79	
	4	1.00	0.96	0.93	0.99	0.95	0.92	0.89	0.93	0.90	0.87	0.91	0.88	0.86	0.84	
光源形式 -	5	1.02	0.99	0.96	1.00	0.97	0.95	0.92	0.95	0.93	0.91	0.93	0.91	0.89	0.87	
器具光束 16,700 lm	7	1.04	1.02	1.00	1.03	1.01	0.99	0.97	0.98	0.97	0.95	0.96	0.95	0.94	0.91	
	10	1.06	1.04	1.03	1.04	1.03	1.02	1.00	1.01	1.00	0.99	0.99	0.98	0.97	0.94	
器具効率 Ft= 100%		単体照度分布(初期値) 														
上方光束 Fu= 0%																
下方光束 Fd= 100%																
最大取付間隔																
A-A 1.20 H																
B-B H																
保守率	良															0.81
	中															0.79
	否															0.75
光度 (cd/1000 lm)																
	A-0	B-B	C-0	A'-0	C'-0											
0	408															
10	399															
20	371															
30	326															
40	269															
50	200															
60	139															
70	80															
80	26															
90																
100																
110																
120																
130																
140																
150																
160																
170																
180																
		配光曲線 (cd/1000 lm) 														

配光曲線
(cd/1000 lm)

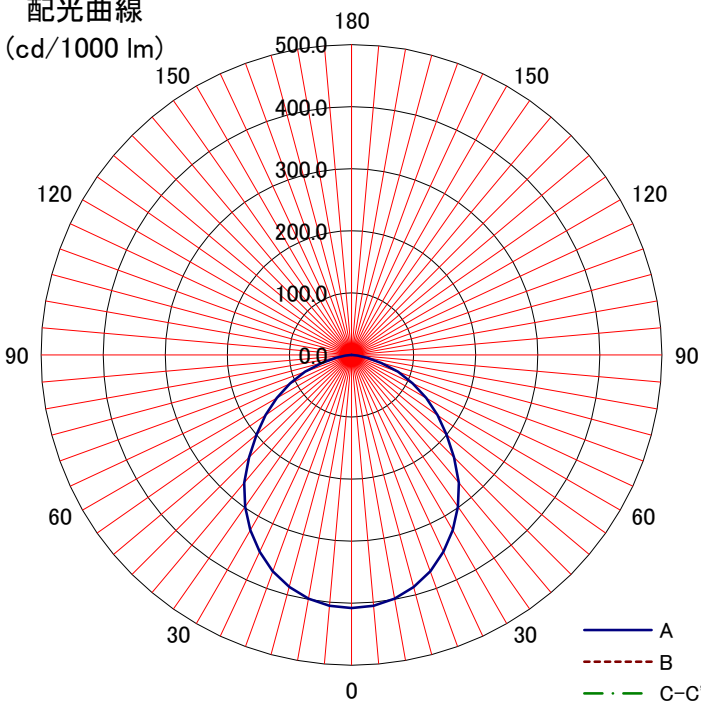