
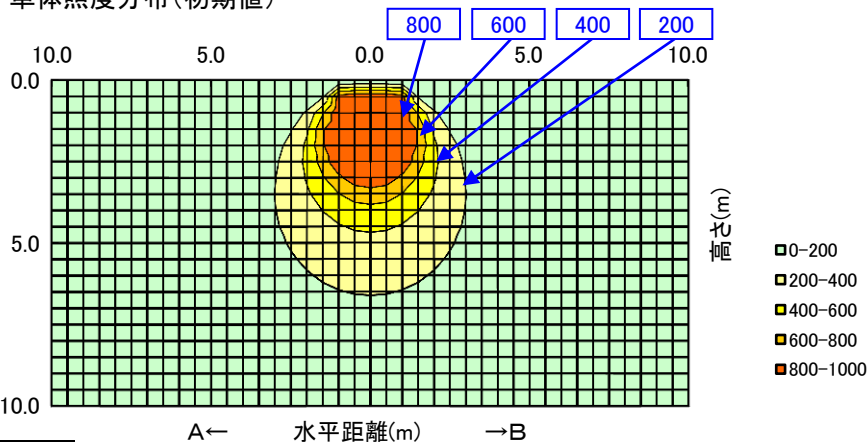
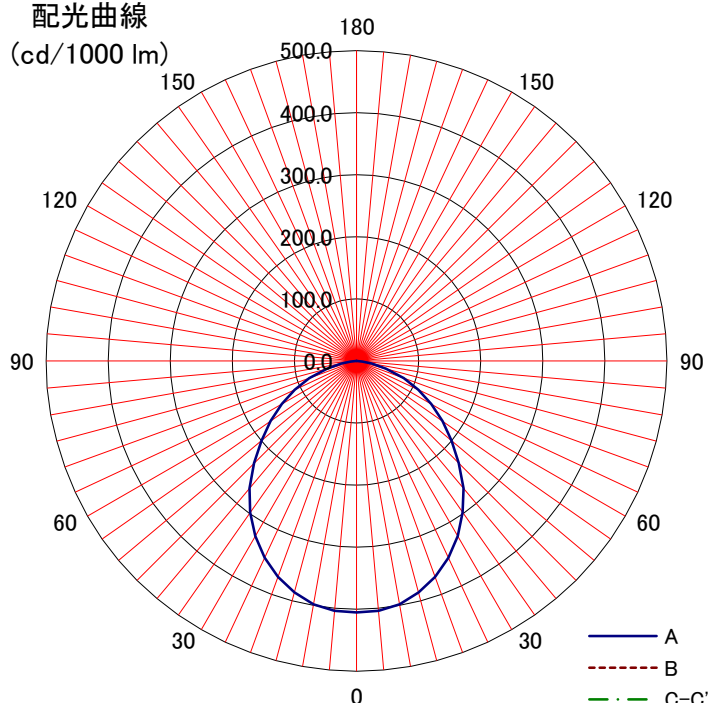


日立照明器具 照明特性

名称: 高天井用LEDランプ (アームタイプ)	反射率	天井	80%			70%				50%			30%			0%			
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%			
		床	10%														0%		
形式: WBMEP2101MNC	室指数	固有照明率 S/H=1.0																	
＜備考＞	0.6	0.61	0.49	0.42	0.60	0.49	0.42	0.37	0.48	0.41	0.37	0.47	0.41	0.37	0.35				
	0.8	0.70	0.60	0.52	0.69	0.59	0.52	0.47	0.58	0.51	0.47	0.56	0.51	0.46	0.44				
姿図 	1	0.77	0.67	0.60	0.75	0.66	0.59	0.54	0.64	0.58	0.54	0.63	0.58	0.53	0.51				
	1.25	0.82	0.73	0.67	0.81	0.73	0.66	0.61	0.71	0.65	0.61	0.69	0.64	0.60	0.58				
	1.5	0.87	0.79	0.72	0.85	0.78	0.72	0.67	0.76	0.71	0.67	0.74	0.70	0.66	0.64				
	2	0.92	0.85	0.80	0.90	0.84	0.79	0.75	0.82	0.78	0.74	0.81	0.77	0.74	0.71				
	2.5	0.95	0.89	0.85	0.94	0.88	0.84	0.80	0.86	0.82	0.79	0.84	0.81	0.78	0.76				
	3	0.97	0.92	0.88	0.96	0.91	0.87	0.84	0.89	0.86	0.83	0.87	0.84	0.81	0.79				
	4	1.00	0.96	0.92	0.98	0.95	0.92	0.89	0.93	0.90	0.87	0.91	0.88	0.86	0.83				
光源形式 -	5	1.02	0.98	0.96	1.00	0.97	0.95	0.92	0.95	0.93	0.91	0.93	0.91	0.89	0.87				
器具光束 21,500 lm	7	1.04	1.02	1.00	1.03	1.00	0.99	0.97	0.98	0.97	0.95	0.96	0.95	0.93	0.91				
	10	1.06	1.04	1.03	1.04	1.03	1.02	1.00	1.01	1.00	0.99	0.99	0.98	0.97	0.94				
器具効率 Ft= 100%		単体照度分布(初期値) 																	
上方光束 Fu= 0%																			
下方光束 Fd= 100%																			
最大取付間隔																			
A-A 1.20 H B-B H																			
保守率	良	0.81																	
	中	0.79																	
	否	0.75																	
光度 (cd/1000 lm)		配光曲線 (cd/1000 lm) 																	
	A-0															B-B	C-0	A'-0	C'-0
0	405																		
10	398																		
20	370																		
30	326																		
40	268																		
50	200																		
60	139																		
70	81																		
80	25																		
90																			
100																			
110																			
120																			
130																			
140																			
150																			
160																			
170																			
180																			