

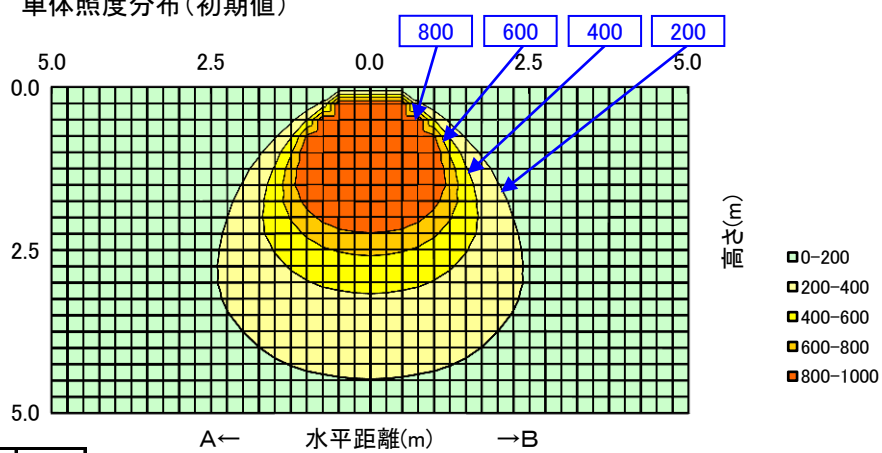


日立照明器具 照明特性

名称: 高天井用LEDランプ (アームタイプ)	反 射 率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: WCBME1101MNC	室指数	固有照明率 S/H=1.0														
＜備考＞	0.6	0.61	0.49	0.42	0.60	0.49	0.42	0.37	0.48	0.42	0.37	0.47	0.41	0.37	0.35	
	0.8	0.71	0.61	0.53	0.70	0.60	0.53	0.48	0.59	0.53	0.48	0.57	0.52	0.48	0.46	
姿図 	1	0.78	0.68	0.61	0.76	0.67	0.61	0.56	0.66	0.60	0.56	0.65	0.59	0.55	0.53	
	1.25	0.84	0.75	0.69	0.82	0.74	0.68	0.64	0.73	0.67	0.63	0.71	0.66	0.63	0.61	
	1.5	0.88	0.80	0.75	0.86	0.79	0.74	0.70	0.78	0.73	0.69	0.76	0.72	0.68	0.66	
	2	0.93	0.87	0.82	0.92	0.86	0.82	0.78	0.84	0.80	0.77	0.82	0.79	0.76	0.74	
	2.5	0.96	0.91	0.87	0.95	0.90	0.86	0.82	0.88	0.84	0.81	0.86	0.83	0.80	0.78	
	3	0.98	0.94	0.90	0.97	0.92	0.89	0.86	0.90	0.87	0.85	0.89	0.86	0.84	0.81	
	4	1.01	0.97	0.94	0.99	0.96	0.93	0.90	0.94	0.91	0.89	0.92	0.90	0.88	0.85	
光源形式 -	5	1.02	0.99	0.97	1.01	0.98	0.96	0.94	0.96	0.94	0.92	0.94	0.92	0.91	0.88	
器具光束 11,500 lm	7	1.04	1.02	1.01	1.03	1.01	1.00	0.98	0.99	0.98	0.96	0.97	0.96	0.95	0.92	
	10	1.06	1.05	1.04	1.05	1.04	1.03	1.02	1.02	1.01	1.00	0.99	0.99	0.98	0.95	
器具効率 Ft= 100%		単体照度分布(初期値) 														
上方光束 Fu= 0%																
下方光束 Fd= 100%																
最大取付間隔																
A-A 1.50 H																
B-B H																
保守率	良															0.81
	中															0.79
	否															0.75
光度 (cd/1000 lm)																
	A-0	B-B	C-0	A'-0	C'-0											
0	349															
10	352															
20	361															
30	353															
40	321															
50	221															
60	130															
70	53															
80	6															
90																
100																
110																
120																
130																
140																
150																
160																
170																
180																
		配光曲線 (cd/1000 lm) 														

配光曲線
(cd/1000 lm)

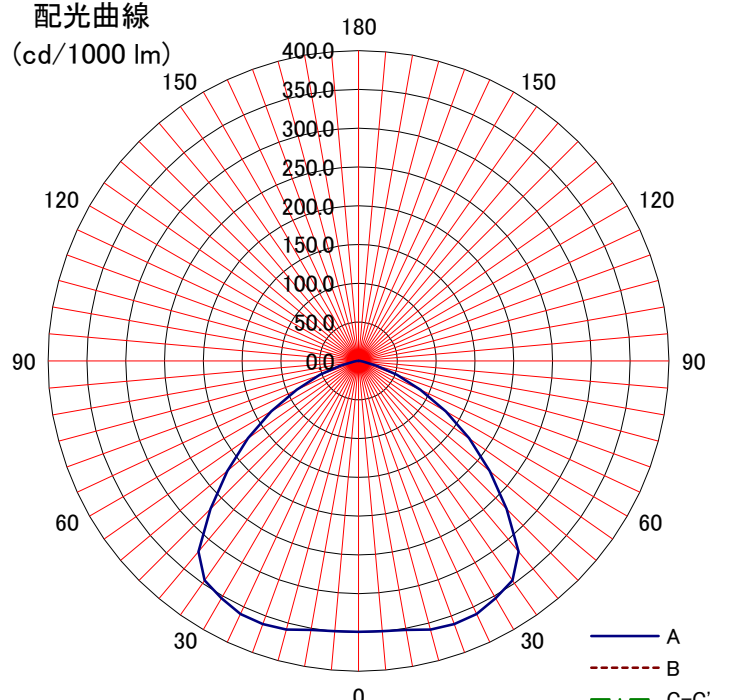