
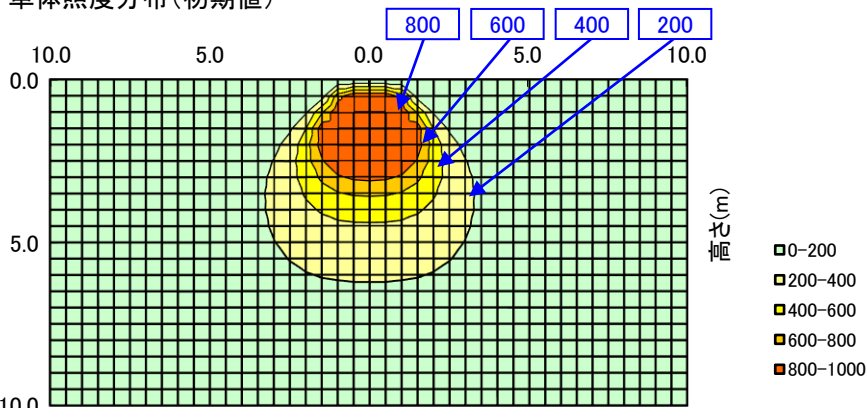
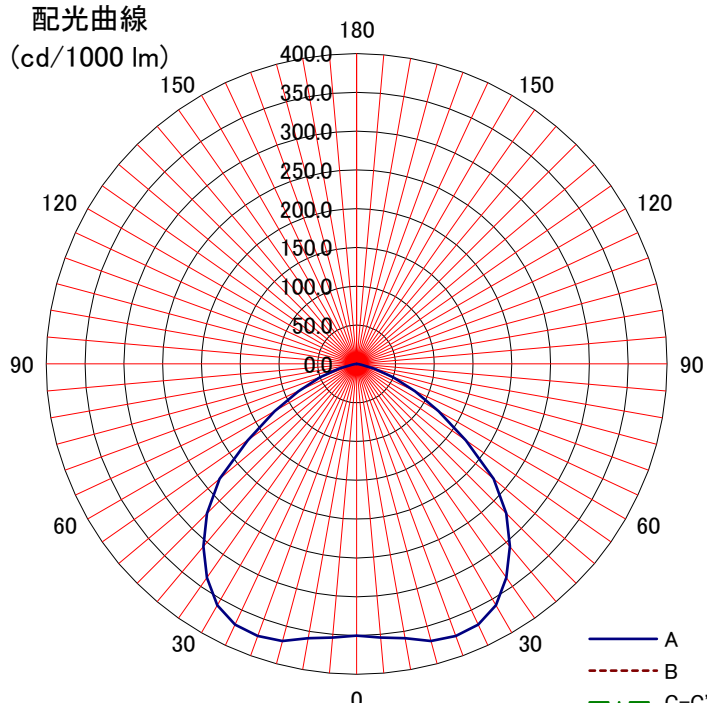


日立照明器具 照明特性

名称: 高天井用LEDランプ (アームタイプ)	反射率	天井	80%			70%				50%			30%			0%			
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%			
		床	10%														0%		
形式: WCBME21AMNC1	室指数	固有照明率 S/H=1.0																	
<備考>	0.6	0.61	0.50	0.43	0.60	0.49	0.43	0.38	0.48	0.42	0.38	0.47	0.42	0.37	0.36				
	0.8	0.71	0.61	0.54	0.70	0.60	0.54	0.49	0.59	0.53	0.49	0.58	0.52	0.48	0.46				
姿図 	1	0.78	0.69	0.62	0.77	0.68	0.61	0.57	0.66	0.61	0.56	0.65	0.60	0.56	0.54				
	1.25	0.84	0.75	0.69	0.82	0.75	0.69	0.64	0.73	0.68	0.64	0.71	0.67	0.63	0.61				
	1.5	0.88	0.81	0.75	0.86	0.80	0.74	0.70	0.78	0.73	0.69	0.76	0.72	0.69	0.67				
	2	0.93	0.87	0.82	0.92	0.86	0.82	0.78	0.84	0.80	0.77	0.83	0.79	0.76	0.74				
	2.5	0.96	0.91	0.87	0.95	0.90	0.86	0.83	0.88	0.85	0.82	0.86	0.83	0.81	0.78				
	3	0.98	0.94	0.90	0.97	0.92	0.89	0.86	0.90	0.87	0.85	0.89	0.86	0.84	0.81				
	4	1.00	0.97	0.94	0.99	0.96	0.93	0.90	0.94	0.91	0.89	0.92	0.90	0.88	0.85				
光源形式 -	5	1.02	0.99	0.97	1.01	0.98	0.96	0.94	0.96	0.94	0.92	0.94	0.92	0.91	0.88				
器具光束 22,000 lm	7	1.04	1.02	1.01	1.03	1.01	1.00	0.98	0.99	0.98	0.96	0.97	0.96	0.95	0.92				
	10	1.06	1.05	1.03	1.05	1.04	1.02	1.01	1.01	1.00	1.00	0.99	0.99	0.98	0.95				
器具効率 Ft= 100%		単体照度分布(初期値)  10.0 5.0 0.0 5.0 10.0 0.0 5.0 10.0 A← 水平距離(m) →B (E)lx 0-200 200-400 400-600 600-800 800-1000																	
上方光束 Fu= 0%																			
下方光束 Fd= 100%																			
最大取付間隔																			
A-A 1.46 H																			
B-B H																			
保守率	良															0.81			
	中															0.79			
	否															0.75			
光度 (cd/1000 lm)		配光曲線 (cd/1000 lm)  180 150 120 90 60 30 0 30 60 90 120 150 180 400.0 350.0 300.0 250.0 200.0 150.0 100.0 50.0 0.0 — A - - - B - · - C-C'																	
	A-0															B-B	C-0	A'-0	C'-0
0	350																		
10	359																		
20	373																		
30	359																		
40	307																		
50	230																		
60	122																		
70	51																		
80	6																		
90																			
100																			
110																			
120																			
130																			
140																			
150																			
160																			
170																			
180																			