
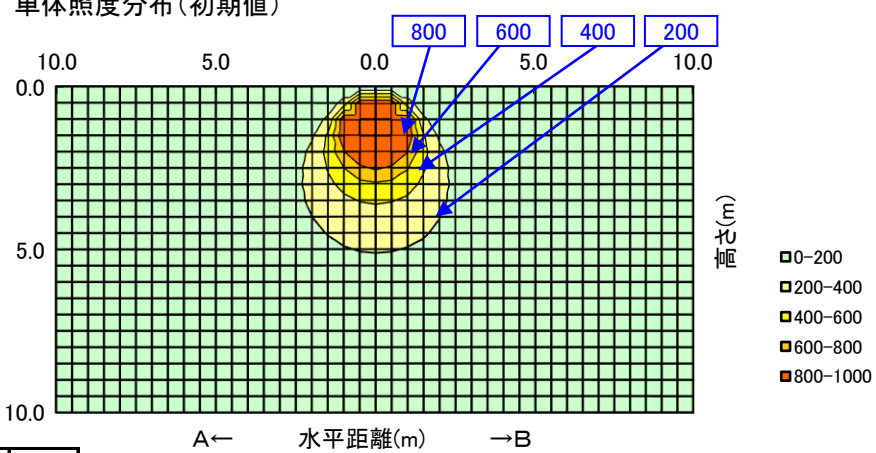
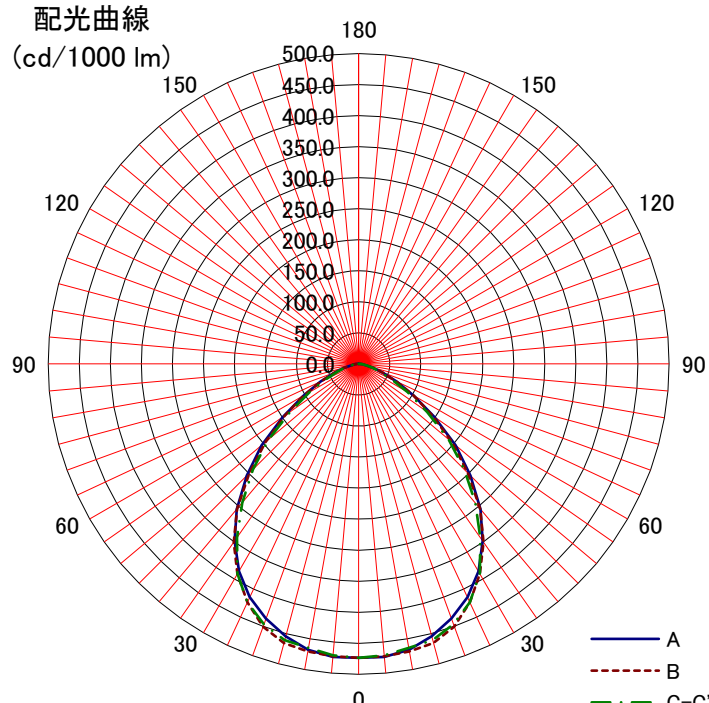


日立照明器具 照明特性																
名称: 高天井用LED器具	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
	形式: WFMTE11AMN-J14B	床	10%													
姿図 	室指数	固有照明率 S/H=1.0														
	<備考>	0.6	0.65	0.54	0.48	0.64	0.54	0.48	0.43	0.53	0.47	0.43	0.52	0.47	0.43	0.41
		0.8	0.74	0.65	0.58	0.73	0.64	0.58	0.54	0.63	0.58	0.53	0.62	0.57	0.53	0.51
		1	0.81	0.72	0.66	0.79	0.71	0.65	0.61	0.70	0.65	0.61	0.68	0.64	0.60	0.58
		1.25	0.86	0.78	0.72	0.85	0.77	0.72	0.68	0.76	0.71	0.67	0.74	0.70	0.67	0.65
		1.5	0.90	0.83	0.78	0.88	0.82	0.77	0.73	0.80	0.76	0.72	0.79	0.75	0.72	0.70
		2	0.94	0.89	0.84	0.93	0.88	0.84	0.80	0.86	0.83	0.79	0.84	0.81	0.79	0.77
		2.5	0.97	0.92	0.88	0.96	0.91	0.88	0.85	0.89	0.86	0.84	0.88	0.85	0.83	0.80
		3	0.99	0.95	0.91	0.97	0.94	0.90	0.87	0.92	0.89	0.86	0.90	0.87	0.85	0.83
	光源形式	4	1.01	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.92	0.90	0.93	0.91	0.89	0.86
-	5	1.03	1.00	0.98	1.01	0.99	0.97	0.95	0.97	0.95	0.93	0.95	0.93	0.92	0.89	
器具光束	7	1.05	1.03	1.01	1.03	1.02	1.00	0.99	1.00	0.98	0.97	0.98	0.96	0.95	0.93	
11,000 lm	10	1.06	1.05	1.04	1.05	1.04	1.03	1.02	1.02	1.01	1.00	1.00	0.99	0.98	0.96	
器具効率 Ft= 100%		単体照度分布(初期値) 														
上方光束 Fu= 0%																
下方光束 Fd= 100%																
最大取付間隔																
A-A 1.22 H																
B-B 1.22 H																
保守率	良 0.83 中 0.81 否 0.76															
光度 (cd/1000 lm)		A-0	B-B	C-0	A'-0	C'-0	配光曲線 (cd/1000 lm) 									
	0	473	473	473												
	10	468	470	465												
	20	436	451	447												
	30	386	391	390												
	40	306	305	292												
	50	204	196	190												
	60	103	102	91												
	70	41	41	36												
	80	13	13	13												
	90	1	1	1												
	100															
	110															
	120															
	130															
	140															
	150															
	160															
	170															
	180															