
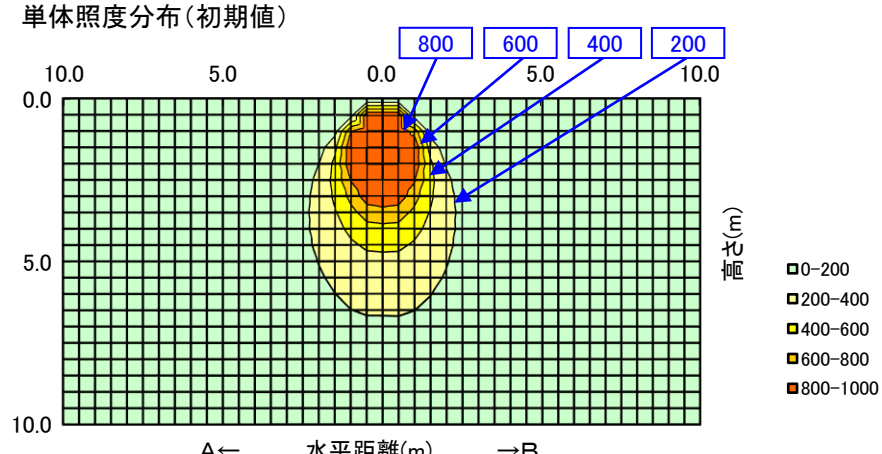
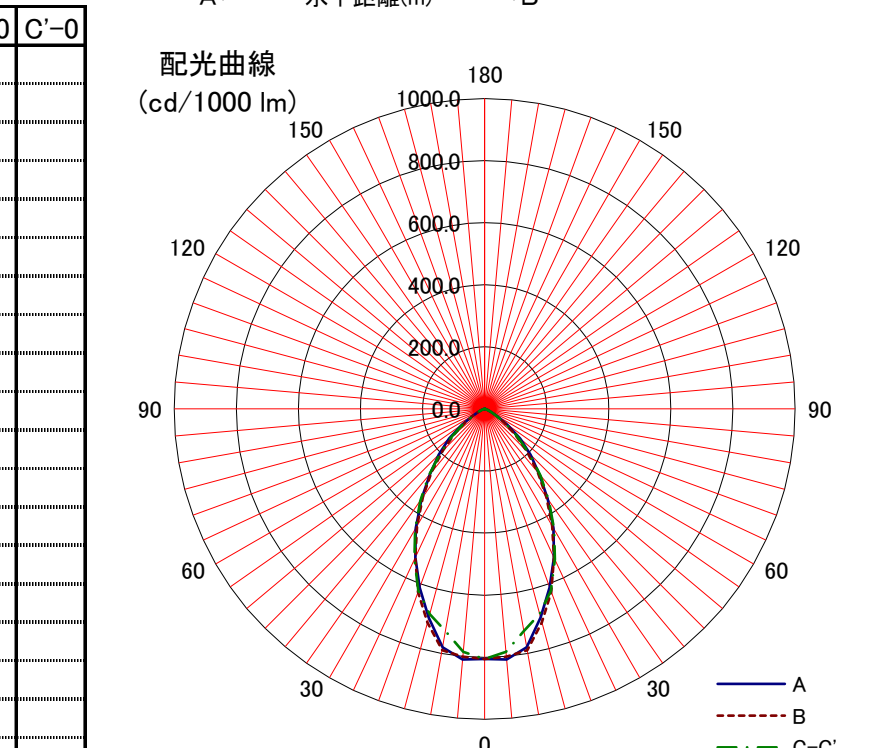


日立照明器具 照明特性

名称: 高天井用LED器具	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: WFMTE11ANN-J14A	室指数	固有照明率 S/H=1.0														
<備考> 配光角(中角)	0.6	0.74	0.65	0.60	0.73	0.65	0.60	0.56	0.64	0.59	0.56	0.63	0.59	0.56	0.55	
	0.8	0.82	0.75	0.70	0.81	0.74	0.69	0.66	0.73	0.69	0.66	0.72	0.68	0.65	0.64	
姿図 	1	0.87	0.81	0.76	0.86	0.80	0.75	0.72	0.79	0.75	0.72	0.78	0.74	0.71	0.70	
	1.25	0.91	0.86	0.81	0.90	0.85	0.81	0.78	0.84	0.80	0.77	0.82	0.79	0.77	0.75	
	1.5	0.94	0.89	0.85	0.93	0.89	0.85	0.82	0.87	0.84	0.81	0.86	0.83	0.81	0.79	
	2	0.98	0.94	0.91	0.97	0.93	0.90	0.88	0.92	0.89	0.87	0.90	0.88	0.86	0.84	
	2.5	1.00	0.97	0.94	0.99	0.96	0.93	0.91	0.94	0.92	0.90	0.92	0.90	0.89	0.87	
	3	1.01	0.98	0.96	1.00	0.97	0.95	0.93	0.95	0.93	0.92	0.94	0.92	0.90	0.88	
	4	1.03	1.00	0.98	1.02	0.99	0.97	0.96	0.98	0.96	0.94	0.96	0.94	0.93	0.91	
光源形式 -	5	1.04	1.02	1.00	1.03	1.01	0.99	0.98	0.99	0.98	0.96	0.97	0.96	0.95	0.93	
	器具光束 11,000 lm	7	1.06	1.04	1.03	1.05	1.03	1.02	1.01	1.01	1.00	0.99	0.99	0.99	0.98	0.95
10		1.07	1.06	1.05	1.06	1.05	1.04	1.04	1.03	1.02	1.02	1.01	1.01	1.00	0.97	
器具効率 Ft= 100%		単体照度分布(初期値) 														
上方光束 Fu= 0%																
下方光束 Fd= 100%																
最大取付間隔		A← 水平距離(m) →B 配光曲線 (cd/1000 lm) 														
A-A 0.92 H																
B-B 0.92 H																
保守率	良															0.81
	中															0.79
	否															0.75
光度 (cd/1000 lm)																
	A-0	B-B	C-0	A'-0	C'-0											
0	806	806	806													
10	780	789	727													
20	613	628	624													
30	444	435	449													
40	274	265	280													
50	149	127	136													
60	45	39	40													
70	9	10	9													
80	4	3	3													
90																
100																
110																
120																
130																
140																
150																
160																
170																
180																