
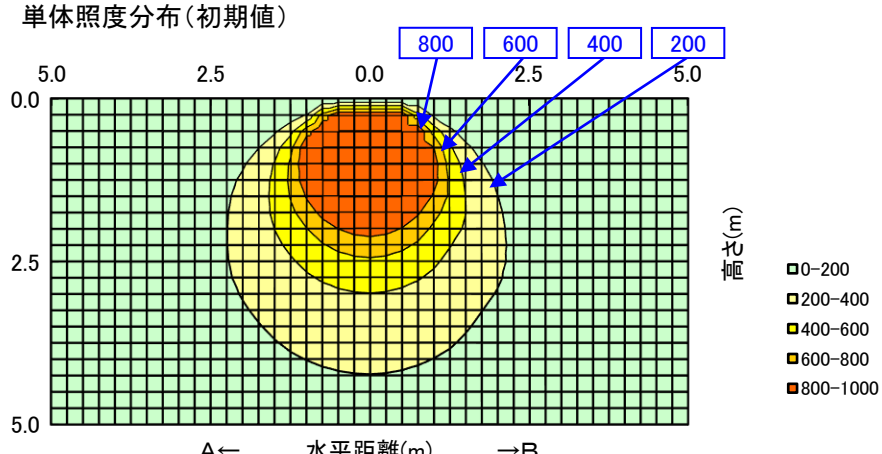
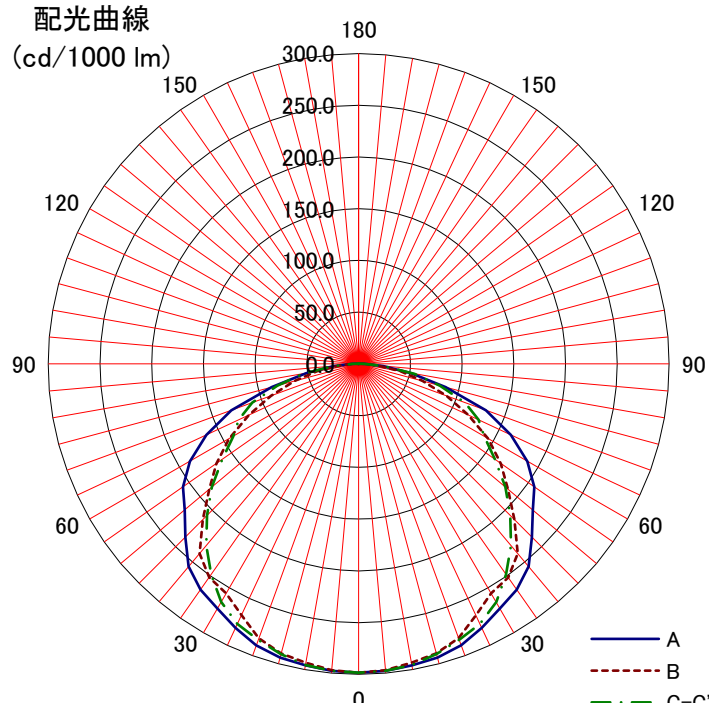


日立照明器具 照明特性

名称: 高天井用LED器具	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: WFMTE11AWN-J14A	室指数	固有照明率 S/H=1.0														
<備考> 配光角(特広角)	0.6	0.55	0.43	0.35	0.53	0.42	0.35	0.30	0.41	0.34	0.30	0.40	0.34	0.29	0.28	
	0.8	0.64	0.52	0.45	0.62	0.52	0.44	0.39	0.50	0.44	0.39	0.49	0.43	0.38	0.36	
姿図 	1	0.70	0.59	0.52	0.68	0.58	0.51	0.46	0.57	0.50	0.45	0.55	0.49	0.45	0.43	
	1.25	0.76	0.66	0.59	0.74	0.65	0.58	0.53	0.63	0.57	0.52	0.61	0.56	0.52	0.49	
	1.5	0.80	0.71	0.64	0.78	0.70	0.64	0.58	0.68	0.63	0.58	0.66	0.61	0.57	0.55	
	2	0.86	0.78	0.72	0.84	0.77	0.71	0.67	0.75	0.70	0.66	0.73	0.69	0.65	0.63	
	2.5	0.89	0.83	0.77	0.87	0.81	0.76	0.72	0.79	0.75	0.71	0.77	0.74	0.70	0.68	
	3	0.91	0.86	0.81	0.90	0.85	0.80	0.76	0.82	0.78	0.75	0.80	0.77	0.74	0.71	
	4	0.94	0.90	0.86	0.93	0.89	0.85	0.82	0.86	0.83	0.80	0.84	0.82	0.79	0.76	
光源形式 -	5	0.96	0.93	0.89	0.95	0.92	0.88	0.85	0.89	0.87	0.84	0.87	0.85	0.83	0.80	
器具光束 12,000 lm	7	0.99	0.96	0.94	0.98	0.95	0.93	0.90	0.93	0.91	0.89	0.91	0.89	0.87	0.85	
	10	1.01	0.99	0.97	1.00	0.98	0.96	0.95	0.96	0.94	0.93	0.93	0.92	0.91	0.88	
器具効率 Ft= 100%		単体照度分布(初期値) 														
上方光束 Fu= 0%																
下方光束 Fd= 100%																
最大取付間隔		配光曲線 (cd/1000 lm) 														
A-A 1.38 H																
B-B 1.32 H																
保守率	良	0.81														
	中	0.79														
	否	0.75														
光度 (cd/1000 lm)																
	A-0	B-B	C-0	A'-0	C'-0											
0	298	298	298													
10	296	293	296													
20	289	282	284													
30	273	256	266													
40	255	239	229													
50	220	188	185													
60	188	145	140													
70	131	90	109													
80	51	41	55													
90	6	6	5													
100																
110																
120																
130																
140																
150																
160																
170																
180																