
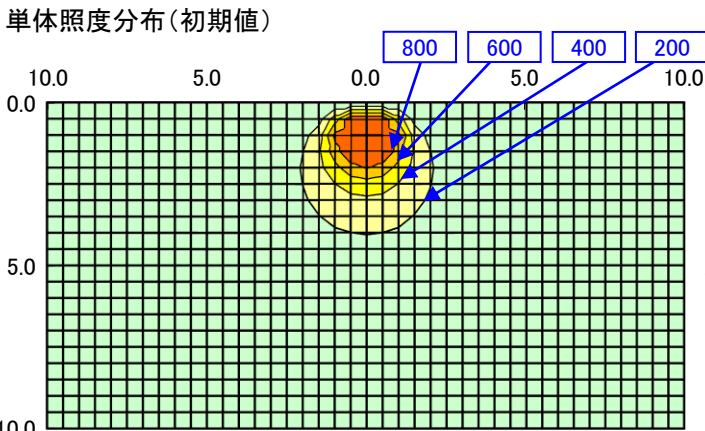
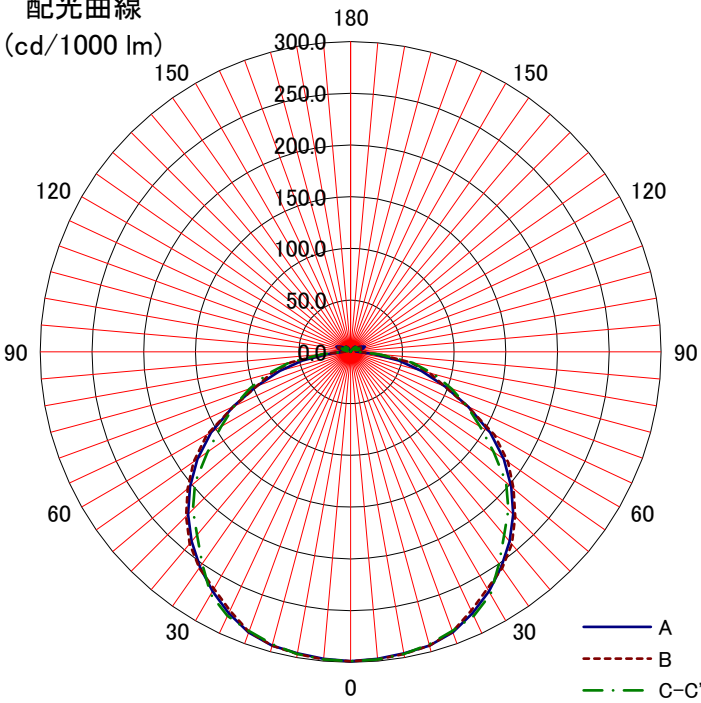
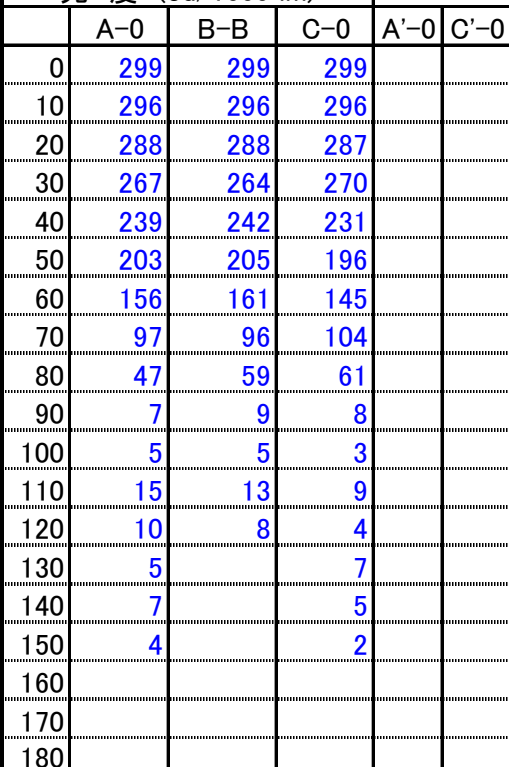


日立照明器具 照明特性

名称：高天井用LED器具		反射率 天井 壁 床	80%			70%				50%			30%			0%	
			70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
形式：WFMTE11AWN-J14B			10%														
		室指数	固有照明率 S/H=1.0														
<備考>		0.6	0.56	0.44	0.36	0.55	0.43	0.36	0.31	0.42	0.35	0.30	0.41	0.34	0.30	0.28	
		0.8	0.66	0.54	0.46	0.64	0.53	0.46	0.40	0.51	0.45	0.40	0.50	0.44	0.39	0.37	
		1	0.72	0.61	0.53	0.70	0.60	0.53	0.47	0.58	0.51	0.46	0.56	0.50	0.46	0.43	
		1.25	0.78	0.68	0.60	0.76	0.67	0.60	0.54	0.65	0.58	0.53	0.62	0.57	0.52	0.50	
		1.5	0.83	0.73	0.66	0.81	0.72	0.65	0.60	0.70	0.64	0.59	0.67	0.62	0.58	0.55	
		2	0.88	0.81	0.74	0.86	0.79	0.73	0.68	0.77	0.72	0.67	0.74	0.70	0.66	0.63	
		2.5	0.92	0.85	0.79	0.90	0.84	0.78	0.74	0.81	0.76	0.72	0.78	0.74	0.71	0.68	
		3	0.94	0.88	0.83	0.92	0.87	0.82	0.78	0.84	0.80	0.76	0.81	0.78	0.75	0.71	
光源形式		4	0.97	0.93	0.88	0.95	0.91	0.87	0.84	0.88	0.85	0.82	0.85	0.82	0.80	0.76	
-		5	0.99	0.95	0.92	0.97	0.94	0.91	0.88	0.91	0.88	0.86	0.88	0.86	0.84	0.80	
器具光束		7	1.02	0.99	0.96	1.00	0.97	0.95	0.93	0.94	0.92	0.90	0.92	0.90	0.88	0.85	
12,000 lm		10	1.04	1.02	1.00	1.02	1.00	0.99	0.97	0.97	0.96	0.94	0.94	0.93	0.92	0.88	
器具効率 Ft= 100%		 単体照度分布(初期値)															
上方光束 Fu= 3.6%																	
下方光束 Fd= 96.4%																	
最大取付間隔		 配光曲線 (cd/1000 lm)															
A-A 1.34 H																	
B-B 1.34 H																	
保守率	良	0.83															
	中	0.81															
	否	0.76															
光度 (cd/1000 lm)			A-0	B-B	C-0	A'-0	C'-0										
0		299	299	299													
10		296	296	296													
20		288	288	287													
30		267	264	270													
40		239	242	231													
50		203	205	196													
60		156	161	145													
70		97	96	104													
80		47	59	61													
90		7	9	8													
100		5	5	3													
110		15	13	9													
120		10	8	4													
130		5		7													
140		7		5													
150		4		2													
160																	
170																	
180																	