
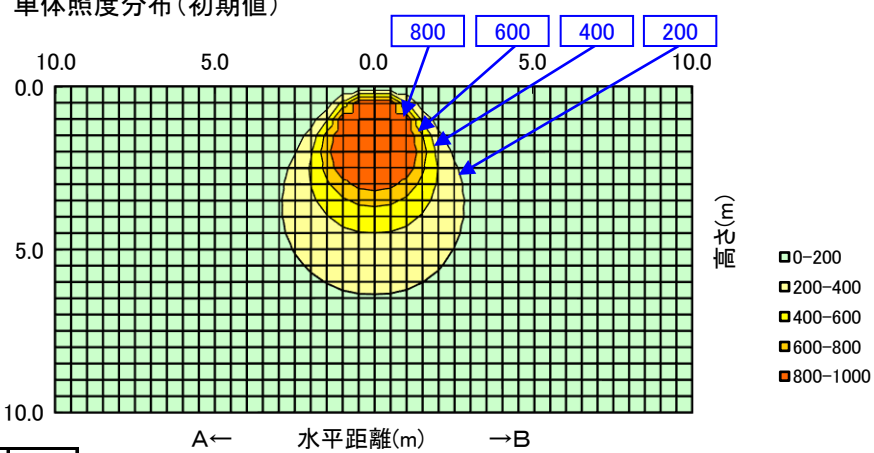
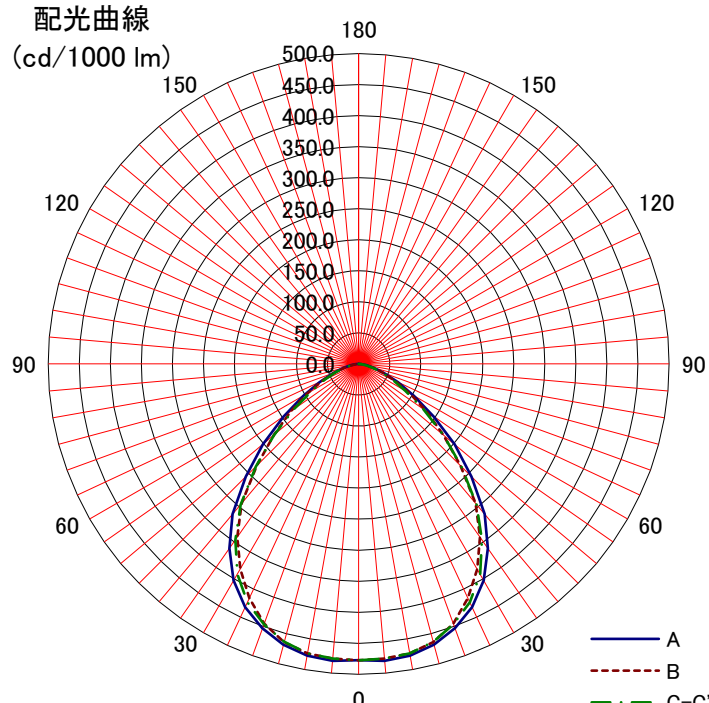


日立照明器具 照明特性

名称: 高天井用LED器具	反射率	天井	80%			70%				50%			30%			0%																																																																																																																							
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%																																																																																																																							
		床	10%														0%																																																																																																																						
形式: WFMTE17AMN-J14A	室指数	固有照明率 S/H=1.0																																																																																																																																					
<備考> 配光角(広角)	0.6	0.65	0.54	0.48	0.64	0.54	0.48	0.43	0.53	0.47	0.43	0.52	0.47	0.43	0.41																																																																																																																								
	0.8	0.74	0.65	0.58	0.73	0.64	0.58	0.54	0.63	0.58	0.53	0.62	0.57	0.53	0.51																																																																																																																								
姿図 	1	0.80	0.72	0.66	0.79	0.71	0.65	0.61	0.70	0.64	0.60	0.68	0.64	0.60	0.58																																																																																																																								
	1.25	0.85	0.78	0.72	0.84	0.77	0.72	0.68	0.76	0.71	0.67	0.74	0.70	0.67	0.65																																																																																																																								
	1.5	0.89	0.83	0.77	0.88	0.82	0.77	0.73	0.80	0.76	0.72	0.78	0.75	0.72	0.70																																																																																																																								
	2	0.94	0.88	0.84	0.93	0.88	0.83	0.80	0.86	0.82	0.79	0.84	0.81	0.78	0.76																																																																																																																								
	2.5	0.96	0.92	0.88	0.95	0.91	0.87	0.84	0.89	0.86	0.83	0.87	0.85	0.82	0.80																																																																																																																								
	3	0.98	0.94	0.91	0.97	0.93	0.90	0.87	0.91	0.88	0.86	0.89	0.87	0.85	0.82																																																																																																																								
光源形式 -	4	1.00	0.97	0.94	0.99	0.96	0.93	0.91	0.94	0.92	0.90	0.92	0.90	0.89	0.86																																																																																																																								
	5	1.02	0.99	0.97	1.01	0.98	0.96	0.94	0.96	0.94	0.93	0.94	0.93	0.91	0.89																																																																																																																								
器具光束 17,000 lm	7	1.04	1.02	1.00	1.03	1.01	0.99	0.98	0.99	0.98	0.96	0.97	0.96	0.95	0.92																																																																																																																								
	10	1.05	1.04	1.03	1.04	1.03	1.02	1.01	1.01	1.00	0.99	0.99	0.98	0.98	0.95																																																																																																																								
器具効率 Ft= 100%		単体照度分布(初期値) 																																																																																																																																					
上方光束 Fu= 0%																																																																																																																																							
下方光束 Fd= 100%																																																																																																																																							
最大取付間隔		光度 (cd/1000 lm) <table><tr><td></td><td>A-0</td><td>B-B</td><td>C-0</td><td>A'-0</td><td>C'-0</td></tr><tr><td>0</td><td>477</td><td>477</td><td>477</td><td></td><td></td></tr><tr><td>10</td><td>477</td><td>474</td><td>474</td><td></td><td></td></tr><tr><td>20</td><td>453</td><td>445</td><td>446</td><td></td><td></td></tr><tr><td>30</td><td>403</td><td>382</td><td>391</td><td></td><td></td></tr><tr><td>40</td><td>316</td><td>293</td><td>296</td><td></td><td></td></tr><tr><td>50</td><td>202</td><td>178</td><td>178</td><td></td><td></td></tr><tr><td>60</td><td>103</td><td>95</td><td>87</td><td></td><td></td></tr><tr><td>70</td><td>44</td><td>41</td><td>39</td><td></td><td></td></tr><tr><td>80</td><td>12</td><td>11</td><td>11</td><td></td><td></td></tr><tr><td>90</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>100</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>110</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>120</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>130</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>140</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>150</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>160</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>170</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>180</td><td></td><td></td><td></td><td></td><td></td></tr></table>															A-0	B-B	C-0	A'-0	C'-0	0	477	477	477			10	477	474	474			20	453	445	446			30	403	382	391			40	316	293	296			50	202	178	178			60	103	95	87			70	44	41	39			80	12	11	11			90						100						110						120						130						140						150						160						170						180					
	A-0															B-B	C-0	A'-0	C'-0																																																																																																																				
0	477															477	477																																																																																																																						
10	477															474	474																																																																																																																						
20	453	445	446																																																																																																																																				
30	403	382	391																																																																																																																																				
40	316	293	296																																																																																																																																				
50	202	178	178																																																																																																																																				
60	103	95	87																																																																																																																																				
70	44	41	39																																																																																																																																				
80	12	11	11																																																																																																																																				
90																																																																																																																																							
100																																																																																																																																							
110																																																																																																																																							
120																																																																																																																																							
130																																																																																																																																							
140																																																																																																																																							
150																																																																																																																																							
160																																																																																																																																							
170																																																																																																																																							
180																																																																																																																																							
保守率		配光曲線 (cd/1000 lm) 																																																																																																																																					
良																																																																																																																																							
中																																																																																																																																							
否																																																																																																																																							