
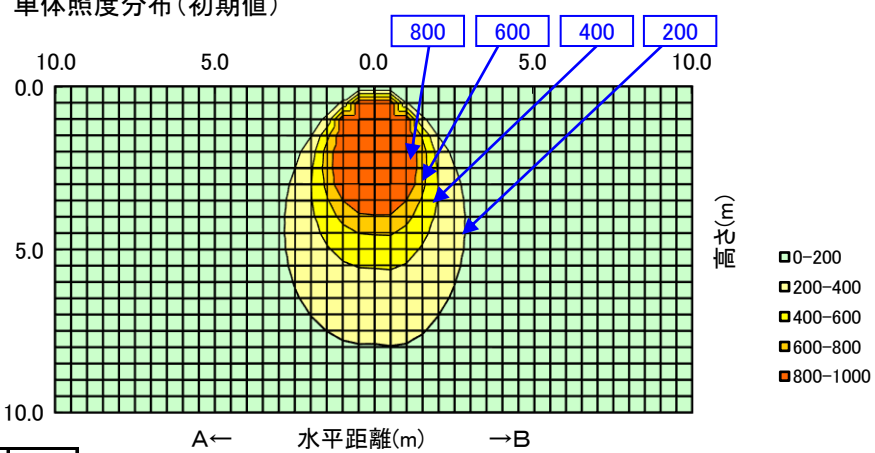
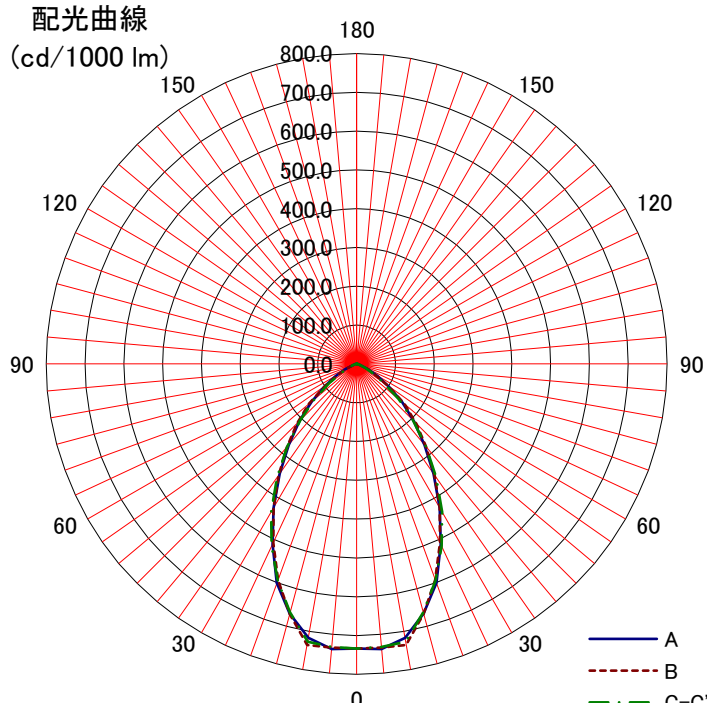


日立照明器具 照明特性

名称: 高天井用LED器具	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: WFMTE17ANN-J14B	室指数	固有照明率 S/H=1.0														
<備考>	0.6	0.72	0.64	0.58	0.72	0.63	0.58	0.54	0.63	0.58	0.54	0.62	0.57	0.54	0.53	
	0.8	0.81	0.73	0.68	0.80	0.73	0.68	0.64	0.72	0.67	0.64	0.71	0.67	0.64	0.62	
姿図 	1	0.86	0.79	0.74	0.85	0.79	0.74	0.71	0.78	0.73	0.70	0.76	0.73	0.70	0.68	
	1.25	0.91	0.85	0.80	0.90	0.84	0.80	0.76	0.83	0.79	0.76	0.81	0.78	0.75	0.74	
	1.5	0.94	0.89	0.84	0.93	0.88	0.84	0.81	0.86	0.83	0.80	0.85	0.82	0.80	0.78	
	2	0.98	0.94	0.90	0.97	0.93	0.89	0.87	0.91	0.88	0.86	0.89	0.87	0.85	0.83	
	2.5	1.00	0.96	0.93	0.99	0.95	0.92	0.90	0.94	0.91	0.89	0.92	0.90	0.88	0.86	
	3	1.01	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.91	0.93	0.92	0.90	0.88	
	4	1.03	1.00	0.98	1.02	0.99	0.97	0.95	0.97	0.96	0.94	0.95	0.94	0.93	0.90	
光源形式	5	1.04	1.02	1.00	1.03	1.01	0.99	0.98	0.99	0.98	0.96	0.97	0.96	0.95	0.92	
器具光束 17,000 lm	7	1.06	1.04	1.03	1.05	1.03	1.02	1.01	1.01	1.00	0.99	0.99	0.98	0.98	0.95	
	10	1.07	1.06	1.05	1.06	1.05	1.04	1.04	1.03	1.02	1.02	1.01	1.01	1.00	0.97	
器具効率 Ft= 100%		単体照度分布(初期値) 														
上方光束 Fu= 0%																
下方光束 Fd= 100%																
最大取付間隔																
A-A 0.98 H																
B-B 0.96 H																
保守率	良	0.83														
	中	0.81														
	否	0.76														
光度 (cd/1000 lm)		配光曲線 (cd/1000 lm) 														
	A-0	B-B	C-0	A'-0	C'-0											
0	734	734	734													
10	717	736	727													
20	601	593	594													
30	429	428	441													
40	272	279	279													
50	152	161	141													
60	62	54	45													
70	13	13	10													
80	4	4	5													
90	1	1	0													
100																
110																
120																
130																
140																
150																
160																
170																
180																