
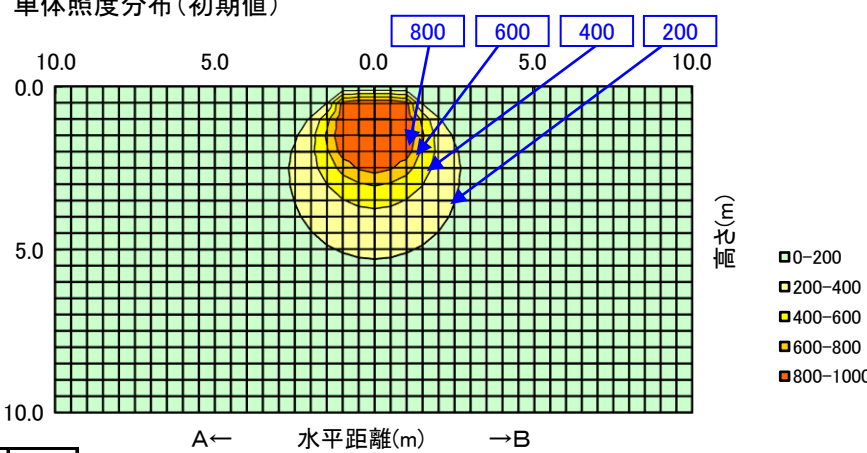
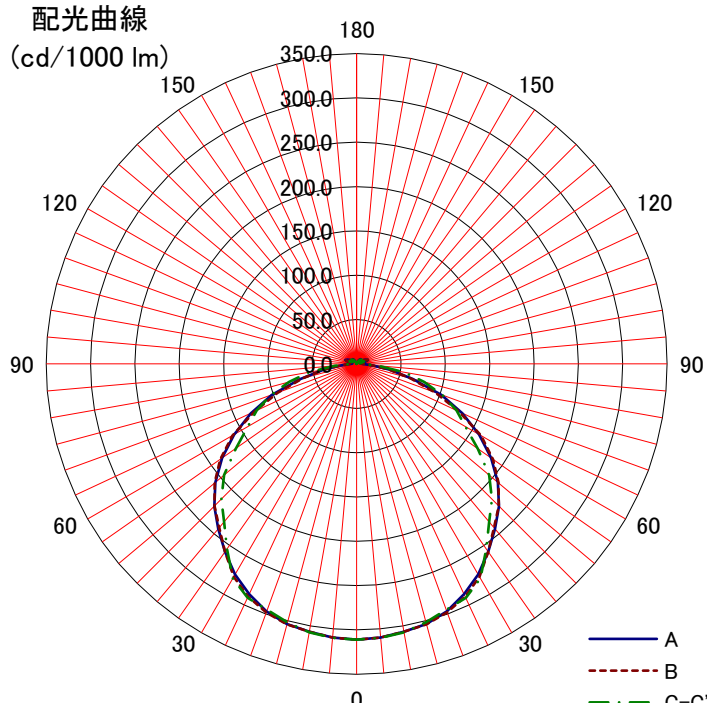


日立照明器具 照明特性

名称: 高天井用LED器具		反射率	天井 壁 床	80%			70%			50%			30%			0%	
				70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
形式: WFMTE17AWN-J14B		室指数	固有照明率 S/H=1.0														0%
																	0%
<備考>		0.6	0.57	0.45	0.37	0.55	0.44	0.37	0.31	0.43	0.36	0.31	0.41	0.35	0.31	0.29	
		0.8	0.66	0.55	0.47	0.65	0.54	0.46	0.41	0.52	0.46	0.40	0.51	0.45	0.40	0.38	
姿図 		1	0.73	0.62	0.54	0.71	0.61	0.54	0.48	0.59	0.52	0.47	0.57	0.51	0.47	0.44	
		1.25	0.79	0.69	0.61	0.77	0.68	0.61	0.55	0.65	0.59	0.54	0.63	0.58	0.54	0.51	
		1.5	0.83	0.74	0.67	0.81	0.73	0.66	0.61	0.71	0.65	0.60	0.68	0.63	0.59	0.56	
		2	0.89	0.81	0.75	0.87	0.80	0.74	0.70	0.77	0.73	0.68	0.75	0.71	0.67	0.64	
		2.5	0.92	0.86	0.80	0.90	0.84	0.79	0.75	0.82	0.77	0.74	0.79	0.75	0.72	0.69	
		3	0.95	0.89	0.84	0.93	0.87	0.83	0.79	0.85	0.81	0.77	0.82	0.79	0.76	0.72	
光源形式		4	0.98	0.93	0.89	0.96	0.92	0.88	0.85	0.89	0.86	0.83	0.86	0.83	0.81	0.77	
-		5	1.00	0.96	0.93	0.98	0.95	0.91	0.88	0.92	0.89	0.86	0.89	0.86	0.84	0.81	
器具光束		7	1.02	1.00	0.97	1.01	0.98	0.96	0.93	0.95	0.93	0.91	0.92	0.91	0.89	0.85	
18,000 lm		10	1.04	1.02	1.01	1.02	1.01	0.99	0.98	0.98	0.96	0.95	0.95	0.94	0.93	0.89	
器具効率 Ft= 100%			単体照度分布(初期値) 														
上方光束 Fu= 3.6%																	
下方光束 Fd= 96.4%																	
最大取付間隔																	
A-A 1.32 H																	
B-B 1.32 H																	
保守率	良	0.83															
	中	0.81															
	否	0.76															
光度 (cd/1000 lm)			配光曲線 (cd/1000 lm) 														
	A-0	B-B															C-0
	0	311	311	311													
	10	307	307	307													
	20	297	298	295													
	30	274	277	279													
	40	243	241	233													
	50	208	209	195													
	60	160	162	142													
	70	102	95	104													
	80	38	37	54													
	90	6	6	6													
	100	6	5	3													
	110	13	14	9													
	120	9	9	5													
	130	6		8													
	140	7		5													
	150	4		3													
	160																
	170																
	180																