
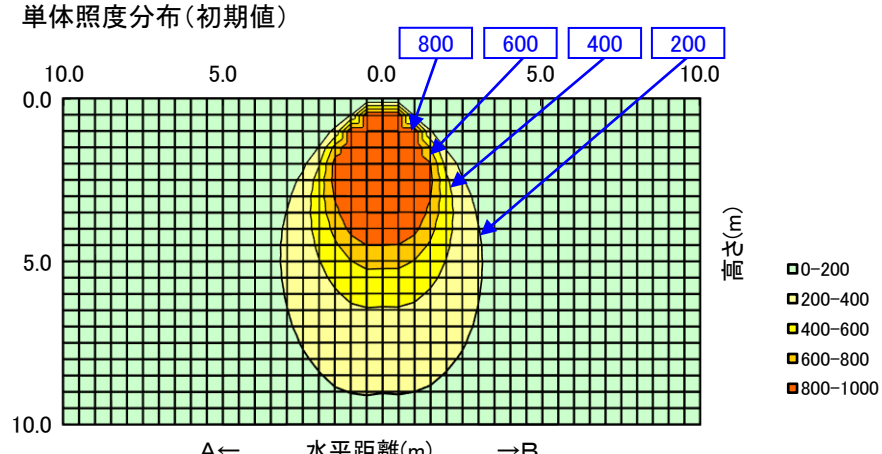


日立照明器具 照明特性

名称: 高天井用LED器具	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: WFMTE22ANN-J14A	室指数	固有照明率 S/H=1.0														
<備考> 配光角(中角)	0.6	0.74	0.66	0.61	0.73	0.66	0.61	0.57	0.65	0.60	0.57	0.64	0.60	0.57	0.55	
	0.8	0.83	0.75	0.70	0.82	0.75	0.70	0.67	0.74	0.70	0.66	0.73	0.69	0.66	0.65	
姿図 	1	0.88	0.81	0.77	0.87	0.81	0.76	0.73	0.79	0.75	0.72	0.78	0.75	0.72	0.71	
	1.25	0.92	0.86	0.82	0.91	0.86	0.81	0.78	0.84	0.81	0.78	0.83	0.80	0.77	0.76	
	1.5	0.95	0.90	0.86	0.94	0.89	0.86	0.83	0.88	0.85	0.82	0.86	0.84	0.81	0.80	
	2	0.99	0.95	0.91	0.97	0.94	0.91	0.88	0.92	0.90	0.87	0.91	0.88	0.86	0.85	
	2.5	1.00	0.97	0.94	0.99	0.96	0.93	0.91	0.94	0.92	0.90	0.93	0.91	0.89	0.87	
	3	1.02	0.99	0.96	1.00	0.98	0.95	0.93	0.96	0.94	0.92	0.94	0.92	0.91	0.89	
	4	1.03	1.01	0.99	1.02	1.00	0.98	0.96	0.98	0.96	0.95	0.96	0.95	0.93	0.91	
光源形式 -	5	1.04	1.03	1.01	1.03	1.01	1.00	0.98	1.00	0.98	0.97	0.98	0.97	0.95	0.93	
	7	1.06	1.05	1.04	1.05	1.04	1.03	1.02	1.02	1.01	1.00	1.00	0.99	0.98	0.96	
器具光束 20,600 lm	10	1.07	1.06	1.06	1.06	1.05	1.05	1.04	1.03	1.03	1.02	1.01	1.01	1.00	0.98	
器具効率 Ft= 100%		単体照度分布(初期値) 														
上方光束 Fu= 0%																
下方光束 Fd= 100%																
最大取付間隔																
A-A		0.96	H													
B-B		0.94	H													
保守率	良	0.81														
	中	0.79														
	否	0.75														
光度 (cd/1000 lm)																
	A-0	B-B	C-0	A'-0	C'-0											
0	793	793	793													
10	790	782	776													
20	635	639	637													
30	449	435	443													
40	291	262	275													
50	146	123	132													
60	44	37	39													
70	8	8	8													
80	2	4	2													
90																
100																
110																
120																
130																
140																
150																
160																
170																
180																
配光曲線		(cd/1000 lm) 