
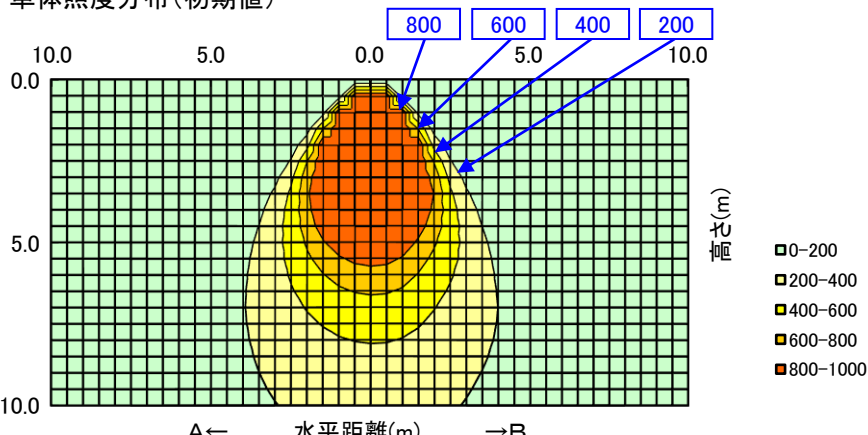
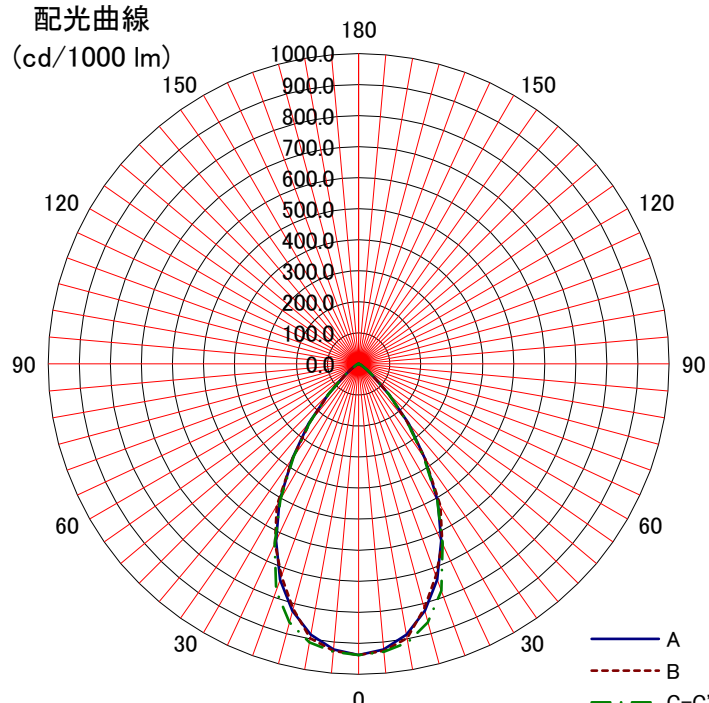


日立照明器具 照明特性

名称: 高天井用LED器具		反射率	天井 壁 床	80%			70%			50%			30%			0%	
				70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
形式: WFMTE28ANN-J24A		室指数	固有照明率 S/H=1.0														
			10%														
<備考> 配光角(中角)		0.6	0.80	0.73	0.68	0.79	0.72	0.68	0.65	0.72	0.68	0.65	0.71	0.67	0.65	0.64	
		0.8	0.87	0.81	0.77	0.86	0.81	0.77	0.74	0.80	0.76	0.73	0.79	0.76	0.73	0.72	
姿図 		1	0.91	0.86	0.82	0.90	0.85	0.82	0.79	0.84	0.81	0.79	0.83	0.80	0.78	0.77	
		1.25	0.95	0.90	0.87	0.94	0.90	0.86	0.84	0.88	0.85	0.83	0.87	0.85	0.83	0.81	
		1.5	0.97	0.93	0.90	0.96	0.93	0.90	0.87	0.91	0.89	0.86	0.90	0.88	0.86	0.84	
		2	1.00	0.97	0.94	0.99	0.96	0.94	0.92	0.95	0.93	0.91	0.93	0.92	0.90	0.88	
		2.5	1.02	0.99	0.97	1.01	0.98	0.96	0.94	0.97	0.95	0.93	0.95	0.93	0.92	0.90	
		3	1.03	1.00	0.98	1.02	0.99	0.97	0.96	0.98	0.96	0.94	0.96	0.95	0.93	0.91	
		4	1.04	1.02	1.00	1.03	1.01	0.99	0.98	0.99	0.98	0.97	0.98	0.96	0.95	0.93	
光源形式		5	1.05	1.03	1.02	1.04	1.02	1.01	1.00	1.01	0.99	0.98	0.99	0.98	0.97	0.95	
		7	1.06	1.05	1.04	1.05	1.04	1.03	1.03	1.02	1.02	1.01	1.00	1.00	0.99	0.97	
器具光束 28,000 lm		10	1.07	1.07	1.06	1.06	1.06	1.05	1.05	1.04	1.03	1.03	1.02	1.01	1.01	0.98	

器具効率 Ft= 100%			単体照度分布(初期値) 														
上方光束 Fu= 0%																	
下方光束 Fd= 100%																	
最大取付間隔																	
A-A 0.94 H																	
B-B 0.96 H																	
保守率	良	0.81															
	中	0.79															
	否	0.75															
光度 (cd/1000 lm)			配光曲線 (cd/1000 lm) 														
	A-0	B-B	C-0	A'-0	C'-0												
0	938	938	938														
10	886	897	911														
20	740	727	778														
30	511	527	505														
40	251	242	245														
50	62	62	67														
60	14	14	15														
70	4	3	3														
80	1	1	1														
90																	
100																	
110																	
120																	
130																	
140																	
150																	
160																	
170																	
180																	