

## 日立照明器具 照明特性


| 名称: 高天井用LED器具       | 反射率  | 天井            | 80%  |      |      | 70%  |      |      |      | 50%  |      |      | 30%  |      |      | 0%   |
|---------------------|------|---------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
|                     |      | 壁             | 70%  | 50%  | 30%  | 70%  | 50%  | 30%  | 10%  | 50%  | 30%  | 10%  | 50%  | 30%  | 10%  | 0%   |
| 形式: WFMTE34BMN-J24A | 室指数  | 床             | 10%  |      |      |      |      |      |      |      |      |      |      |      |      | 0%   |
|                     |      | 固有照明率 S/H=1.0 |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
| 〈備考〉                | 0.6  | 0.65          | 0.55 | 0.48 | 0.64 | 0.54 | 0.48 | 0.43 | 0.53 | 0.47 | 0.43 | 0.52 | 0.47 | 0.43 | 0.41 |      |
|                     | 0.8  | 0.75          | 0.65 | 0.59 | 0.74 | 0.65 | 0.59 | 0.54 | 0.63 | 0.58 | 0.54 | 0.62 | 0.57 | 0.53 | 0.52 |      |
| 姿図                  | 1    | 0.81          | 0.72 | 0.66 | 0.80 | 0.72 | 0.66 | 0.61 | 0.70 | 0.65 | 0.61 | 0.69 | 0.64 | 0.61 | 0.59 |      |
|                     | 1.25 | 0.86          | 0.79 | 0.73 | 0.85 | 0.78 | 0.72 | 0.68 | 0.76 | 0.71 | 0.68 | 0.75 | 0.71 | 0.67 | 0.65 |      |
|                     | 1.5  | 0.90          | 0.83 | 0.78 | 0.89 | 0.82 | 0.78 | 0.74 | 0.81 | 0.76 | 0.73 | 0.79 | 0.75 | 0.72 | 0.70 |      |
|                     | 2    | 0.95          | 0.89 | 0.85 | 0.93 | 0.88 | 0.84 | 0.81 | 0.87 | 0.83 | 0.80 | 0.85 | 0.82 | 0.79 | 0.77 |      |
|                     | 2.5  | 0.97          | 0.93 | 0.89 | 0.96 | 0.92 | 0.88 | 0.85 | 0.90 | 0.87 | 0.84 | 0.88 | 0.85 | 0.83 | 0.81 |      |
|                     | 3    | 0.99          | 0.95 | 0.92 | 0.98 | 0.94 | 0.91 | 0.88 | 0.92 | 0.89 | 0.87 | 0.90 | 0.88 | 0.86 | 0.83 |      |
|                     | 光源形式 | 4             | 1.01 | 0.98 | 0.95 | 1.00 | 0.97 | 0.94 | 0.92 | 0.95 | 0.93 | 0.91 | 0.93 | 0.91 | 0.89 | 0.87 |
| —                   | 5    | 1.03          | 1.00 | 0.98 | 1.02 | 0.99 | 0.97 | 0.95 | 0.97 | 0.95 | 0.94 | 0.95 | 0.94 | 0.92 | 0.90 |      |
| 器具光束<br>33,700 lm   | 7    | 1.05          | 1.03 | 1.02 | 1.04 | 1.02 | 1.01 | 0.99 | 1.00 | 0.99 | 0.97 | 0.98 | 0.97 | 0.96 | 0.93 |      |
|                     | 10   | 1.07          | 1.05 | 1.04 | 1.05 | 1.04 | 1.03 | 1.02 | 1.02 | 1.01 | 1.01 | 1.00 | 0.99 | 0.99 | 0.96 |      |

|              |      |
|--------------|------|
| 器具効率 $F_t$ = | 100% |
| 上方光束 $F_u$ = | 0%   |
| 下方光束 $F_d$ = | 100% |

| 最大取付間隔 |      |      |
|--------|------|------|
| A-A    | 1.22 | H    |
| B-B    | 1.22 | H    |
| 保守率    | 良    | 0.83 |
|        | 中    | 0.81 |
|        | 否    | 0.76 |

| 光 度 (cd/1000 lm) |     |     | 10.0 |      |      |
|------------------|-----|-----|------|------|------|
|                  | A-0 | B-B | C-0  | A'-0 | C'-0 |
| 0                | 473 | 473 | 473  |      |      |
| 10               | 473 | 479 | 471  |      |      |
| 20               | 447 | 455 | 445  |      |      |
| 30               | 389 | 389 | 393  |      |      |
| 40               | 307 | 308 | 302  |      |      |
| 50               | 197 | 196 | 188  |      |      |
| 60               | 100 | 102 | 89   |      |      |
| 70               | 43  | 43  | 40   |      |      |
| 80               | 9   | 10  | 10   |      |      |
| 90               |     |     |      |      |      |
| 100              |     |     |      |      |      |
| 110              |     |     |      |      |      |
| 120              |     |     |      |      |      |
| 130              |     |     |      |      |      |
| 140              |     |     |      |      |      |
| 150              |     |     |      |      |      |
| 160              |     |     |      |      |      |
| 170              |     |     |      |      |      |
| 180              |     |     |      |      |      |

单体照度分布(初期値)

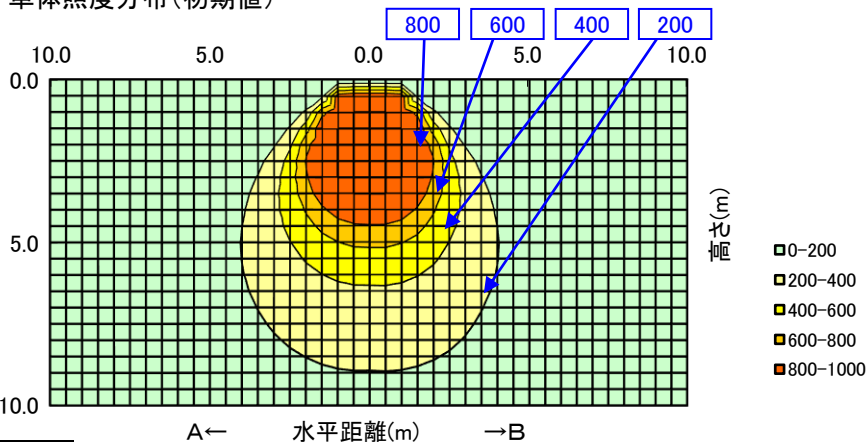

配光曲線  
(cd/1000 lm)

