



日立照明器具 照明特性

名称: 高天井用LED器具	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: WFMTE44AMN-J24A	室指数	固有照明率 S/H=1.0														
<備考> 配光角(広角)	0.6	0.67	0.57	0.51	0.66	0.57	0.51	0.47	0.56	0.50	0.46	0.55	0.50	0.46	0.45	
	0.8	0.77	0.68	0.62	0.76	0.68	0.62	0.58	0.66	0.61	0.57	0.65	0.61	0.57	0.55	
姿図 	1	0.83	0.75	0.69	0.82	0.74	0.69	0.65	0.73	0.68	0.65	0.72	0.68	0.64	0.62	
	1.25	0.88	0.81	0.76	0.87	0.80	0.75	0.72	0.79	0.75	0.71	0.78	0.74	0.71	0.69	
	1.5	0.92	0.86	0.81	0.91	0.85	0.80	0.77	0.83	0.79	0.76	0.82	0.78	0.76	0.74	
	2	0.96	0.91	0.87	0.95	0.90	0.87	0.84	0.89	0.86	0.83	0.87	0.84	0.82	0.80	
	2.5	0.99	0.94	0.91	0.97	0.94	0.90	0.87	0.92	0.89	0.86	0.90	0.88	0.85	0.83	
	3	1.00	0.96	0.93	0.99	0.95	0.93	0.90	0.94	0.91	0.89	0.92	0.90	0.88	0.86	
	4	1.02	0.99	0.97	1.01	0.98	0.96	0.94	0.96	0.94	0.92	0.94	0.93	0.91	0.89	
光源形式	5	1.04	1.01	0.99	1.02	1.00	0.98	0.96	0.98	0.97	0.95	0.96	0.95	0.94	0.91	
	7	1.05	1.04	1.02	1.04	1.03	1.01	1.00	1.01	1.00	0.98	0.99	0.98	0.97	0.94	
器具光束 43,000 lm	10	1.07	1.06	1.05	1.06	1.05	1.04	1.03	1.03	1.02	1.01	1.01	1.00	1.00	0.97	

器具効率 Ft= 100%					
上方光束 Fu= 0%					
下方光束 Fd= 100%					
最大取付間隔					
A-A		1.40 H			
B-B		1.32 H			
保守率	良	0.81			
	中	0.79			
	否	0.75			
光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	427	427	427		
10	467	471	468		
20	543	515	517		
30	452	392	413		
40	319	303	311		
50	175	211	212		
60	46	95	77		
70	11	22	15		
80	1	3	1		
90					
100					
110					
120					
130					
140					
150					
160					
170					
180					

単体照度分布(初期値)

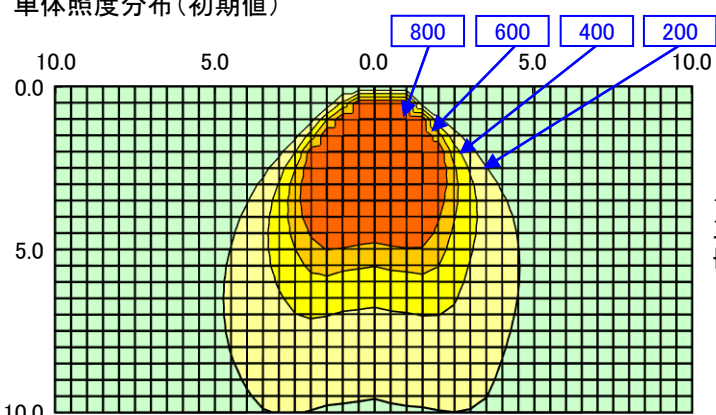

10.0 5.0 0.0 5.0 10.0


0.0 5.0 10.0

A← 水平距離(m) →B

(E)lx

- 0-200
- 200-400
- 400-600
- 600-800
- 800-1000

配光曲線
(cd/1000 lm)

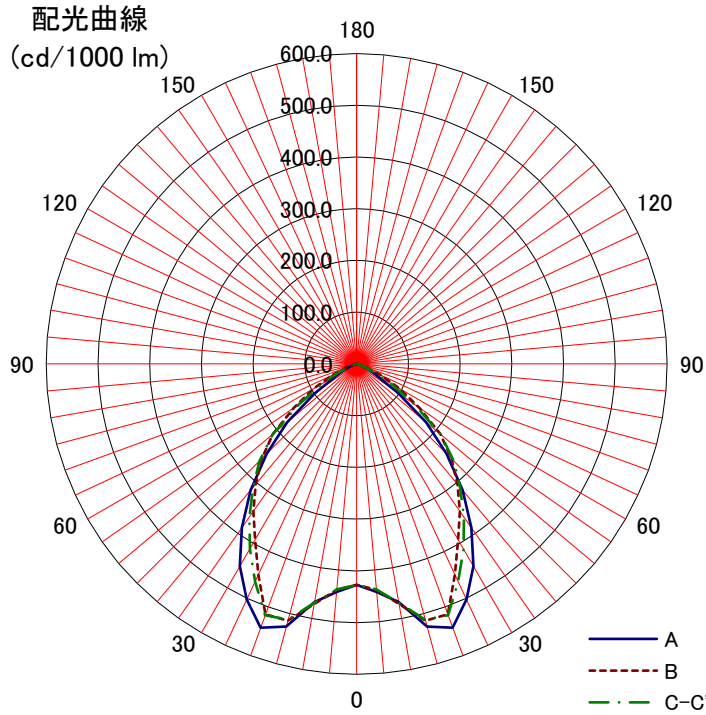

180 150 120 90 60 30 0

600.0 500.0 400.0 300.0 200.0 100.0 0.0

A
B
C-C'