



日立照明器具 照明特性

名称: 高天井用LEDランプ (アームタイプ)	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: WGBME1601MNC	室指数	固有照明率 S/H=1.0														
＜備考＞	0.6	0.61	0.50	0.42	0.60	0.49	0.42	0.37	0.48	0.42	0.37	0.47	0.41	0.37	0.35	
	0.8	0.71	0.61	0.54	0.70	0.60	0.53	0.48	0.59	0.53	0.48	0.58	0.52	0.48	0.46	
姿図 	1	0.78	0.68	0.61	0.77	0.68	0.61	0.56	0.66	0.60	0.56	0.65	0.60	0.55	0.53	
	1.25	0.84	0.75	0.69	0.82	0.74	0.68	0.64	0.73	0.68	0.63	0.71	0.67	0.63	0.61	
	1.5	0.88	0.81	0.75	0.87	0.80	0.74	0.70	0.78	0.73	0.69	0.76	0.72	0.69	0.66	
	2	0.94	0.87	0.82	0.92	0.86	0.82	0.78	0.85	0.81	0.77	0.83	0.79	0.76	0.74	
	2.5	0.97	0.91	0.87	0.95	0.90	0.86	0.83	0.88	0.85	0.82	0.86	0.83	0.81	0.78	
	3	0.98	0.94	0.90	0.97	0.93	0.89	0.86	0.91	0.88	0.85	0.89	0.86	0.84	0.81	
	4	1.01	0.97	0.94	1.00	0.96	0.93	0.91	0.94	0.92	0.89	0.92	0.90	0.88	0.86	
光源形式 -	5	1.03	1.00	0.97	1.01	0.99	0.96	0.94	0.97	0.95	0.93	0.95	0.93	0.91	0.89	
器具光束 16,100 lm	7	1.05	1.03	1.01	1.04	1.02	1.00	0.99	1.00	0.98	0.97	0.98	0.96	0.95	0.93	
	10	1.07	1.05	1.04	1.05	1.04	1.03	1.02	1.02	1.01	1.00	1.00	0.99	0.98	0.96	
器具効率 Ft= 100%		単体照度分布(初期値)  800 600 400 200 5.0 2.5 0.0 2.5 5.0 0.0 2.5 5.0 A← 水平距離(m) →B (E)lx 0-200 200-400 400-600 600-800 800-1000														
上方光束 Fu= 0%																
下方光束 Fd= 100%																
最大取付間隔																
A-A 1.50 H																
B-B H																
保守率	良	0.81														
	中	0.79														
	否	0.75														
光度 (cd/1000 lm)																
	A-0	B-B	C-0	A'-0	C'-0											
0	371															
10	370															
20	373															
30	363															
40	318															
50	222															
60	126															
70	50															
80																
90																
100																
110																
120																
130																
140																
150																
160																
170																
180																

配光曲線 (cd/1000 lm)																
180	150	120	90	60	30	0	30	60	90	120	150	180				
400.0	350.0	300.0	250.0	200.0	150.0	100.0	50.0	0.0	50.0	100.0	150.0	200.0	250.0	300.0	350.0	400.0
A B C-C'																

配光曲線
(cd/1000 lm)

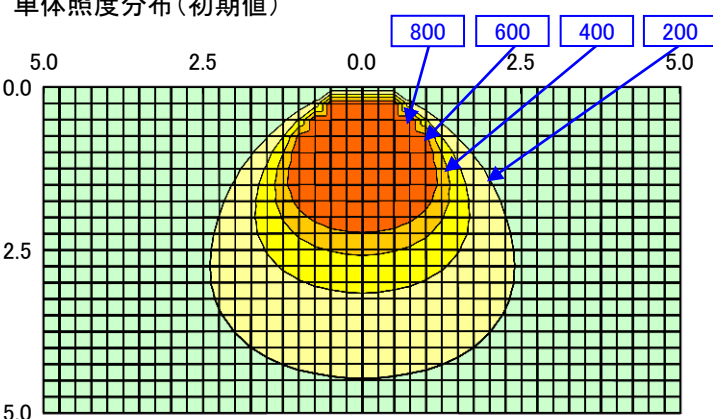