
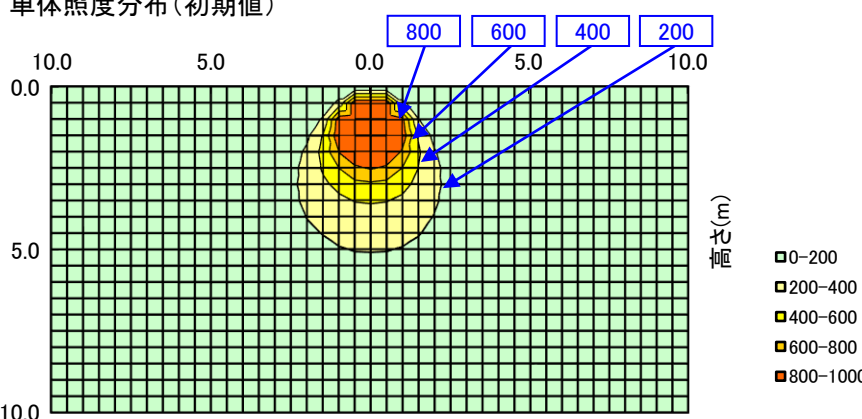
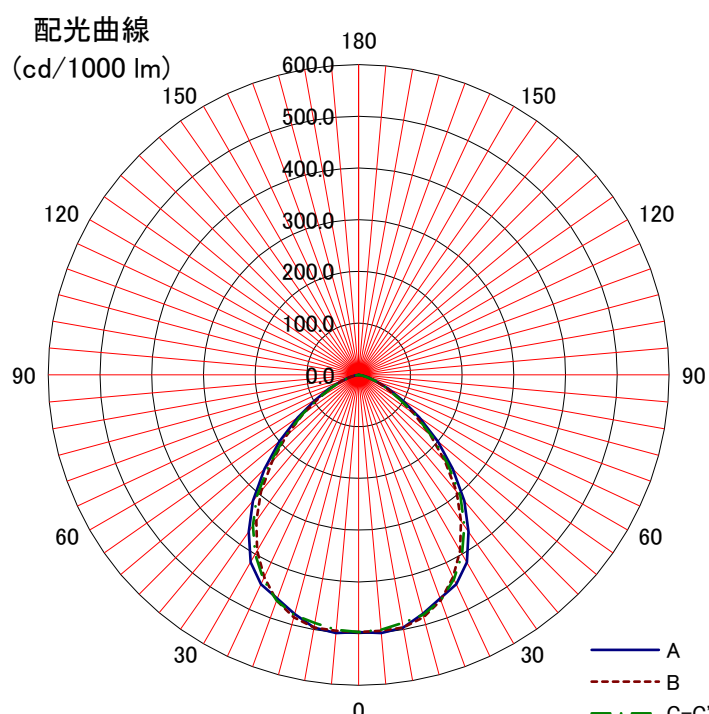


日立照明器具 照明特性

名称: 高天井用LED器具	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: WGMTE11AMN-J14A	室指数	固有照明率 S/H=1.0														
<備考> 配光角(広角)	0.6	0.66	0.56	0.49	0.65	0.55	0.49	0.45	0.54	0.49	0.44	0.53	0.48	0.44	0.43	
	0.8	0.76	0.66	0.60	0.74	0.66	0.60	0.55	0.65	0.59	0.55	0.63	0.59	0.55	0.53	
姿図 	1	0.82	0.73	0.67	0.80	0.73	0.67	0.63	0.71	0.66	0.62	0.70	0.65	0.62	0.60	
	1.25	0.87	0.79	0.74	0.86	0.79	0.73	0.69	0.77	0.73	0.69	0.76	0.72	0.68	0.66	
	1.5	0.91	0.84	0.79	0.89	0.83	0.79	0.75	0.82	0.77	0.74	0.80	0.76	0.73	0.71	
	2	0.95	0.90	0.86	0.94	0.89	0.85	0.82	0.87	0.84	0.81	0.86	0.83	0.80	0.78	
	2.5	0.98	0.93	0.90	0.97	0.92	0.89	0.86	0.91	0.88	0.85	0.89	0.86	0.84	0.82	
	3	1.00	0.96	0.92	0.98	0.95	0.91	0.89	0.93	0.90	0.88	0.91	0.88	0.86	0.84	
	4	1.02	0.99	0.96	1.00	0.98	0.95	0.93	0.96	0.93	0.91	0.94	0.92	0.90	0.88	
光源形式 -	5	1.03	1.01	0.98	1.02	1.00	0.98	0.96	0.98	0.96	0.94	0.96	0.94	0.93	0.90	
器具光束 10,400 lm	7	1.05	1.04	1.02	1.04	1.02	1.01	1.00	1.00	0.99	0.98	0.98	0.97	0.96	0.94	
	10	1.07	1.06	1.05	1.06	1.05	1.04	1.03	1.02	1.02	1.01	1.00	1.00	0.99	0.96	
器具効率 Ft= 100%		単体照度分布(初期値) 														
上方光束 Fu= 0%																
下方光束 Fd= 100%																
最大取付間隔		配光曲線 														
A-A 1.24 H																
B-B 1.18 H																
保守率	良	0.81														
	中	0.79														
	否	0.75														
光度 (cd/1000 lm)																
	A-0	B-B	C-0	A'-0	C'-0											
0	497	497	497													
10	496	496	487													
20	460	464	464													
30	418	392	400													
40	318	294	306													
50	200	182	187													
60	97	89	89													
70	37	36	33													
80	7	7	7													
90																
100																
110																
120																
130																
140																
150																
160																
170																
180																