
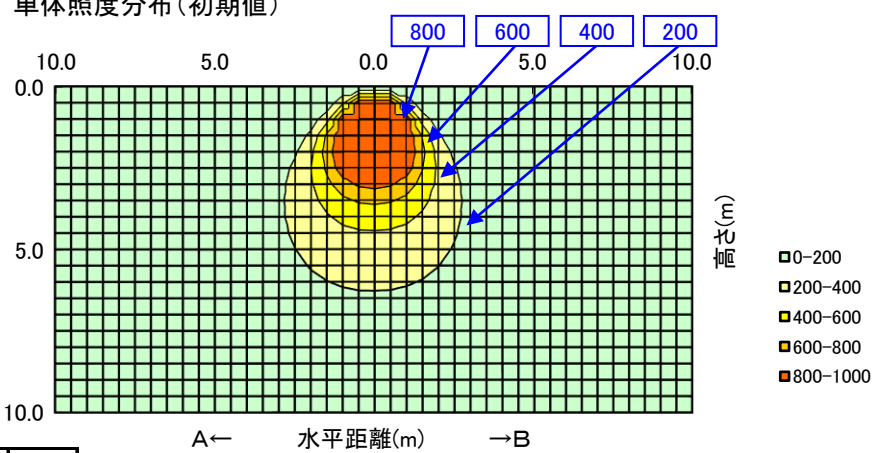
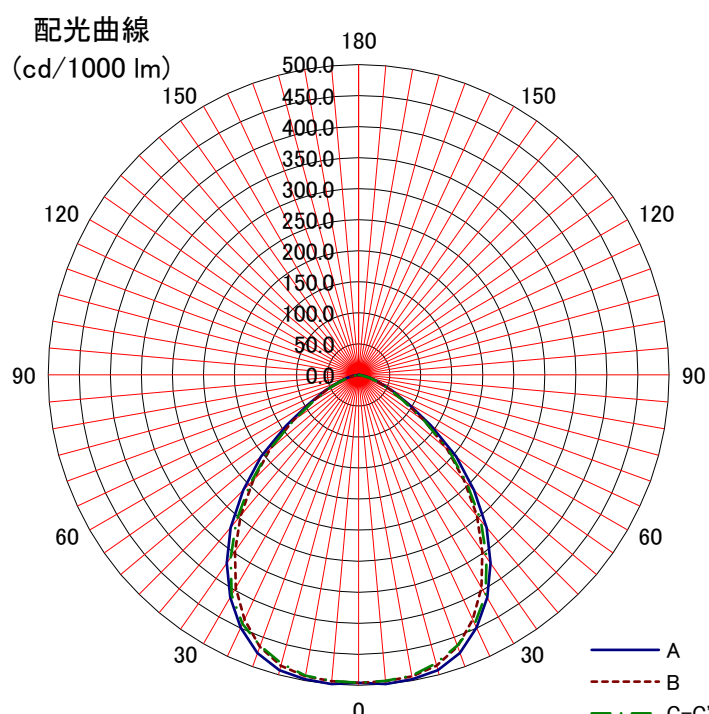


日立照明器具 照明特性

名称: 高天井用LED器具	反射率	天井 壁 床	80%			70%				50%			30%			0%
			70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
			10%													
形式: WGMTE17AMN-J14A	室指数		固有照明率 S/H=1.0													
<備考> 配光角(広角)	0.6	0.66	0.56	0.50	0.65	0.56	0.49	0.45	0.55	0.49	0.45	0.54	0.49	0.45	0.43	
	0.8	0.76	0.67	0.60	0.75	0.66	0.60	0.56	0.65	0.60	0.55	0.64	0.59	0.55	0.53	
姿図 	1	0.82	0.74	0.68	0.81	0.73	0.67	0.63	0.72	0.67	0.63	0.70	0.66	0.62	0.60	
	1.25	0.87	0.80	0.74	0.86	0.79	0.74	0.70	0.78	0.73	0.69	0.76	0.72	0.69	0.67	
	1.5	0.91	0.85	0.79	0.90	0.84	0.79	0.75	0.82	0.78	0.74	0.81	0.77	0.74	0.72	
	2	0.96	0.90	0.86	0.94	0.90	0.86	0.82	0.88	0.84	0.81	0.86	0.83	0.81	0.78	
	2.5	0.98	0.94	0.90	0.97	0.93	0.89	0.86	0.91	0.88	0.85	0.89	0.87	0.84	0.82	
	3	1.00	0.96	0.93	0.99	0.95	0.92	0.89	0.93	0.90	0.88	0.91	0.89	0.87	0.84	
	4	1.02	0.99	0.96	1.01	0.98	0.95	0.93	0.96	0.94	0.92	0.94	0.92	0.90	0.88	
光源形式	5	1.04	1.01	0.99	1.02	1.00	0.98	0.96	0.98	0.96	0.95	0.96	0.94	0.93	0.91	
器具光束 15,800 lm	7	1.06	1.04	1.02	1.04	1.03	1.01	1.00	1.01	0.99	0.98	0.99	0.98	0.97	0.94	
	10	1.07	1.06	1.05	1.06	1.05	1.04	1.03	1.03	1.02	1.01	1.01	1.00	0.99	0.97	
器具効率 Ft= 100%		単体照度分布(初期値) 														
上方光束 Fu= 0%																
下方光束 Fd= 100%																
最大取付間隔		配光曲線 														
A-A 1.24 H																
B-B 1.20 H																
保守率	良	0.81														
	中	0.79														
	否	0.75														
光度 (cd/1000 lm)																
	A-0	B-B	C-0	A'-0	C'-0											
0	496	496	496													
10	498	493	492													
20	477	466	464													
30	414	396	409													
40	321	296	306													
50	205	186	190													
60	92	86	83													
70	35	33	33													
80	9	7	7													
90																
100																
110																
120																
130																
140																
150																
160																
170																
180																