
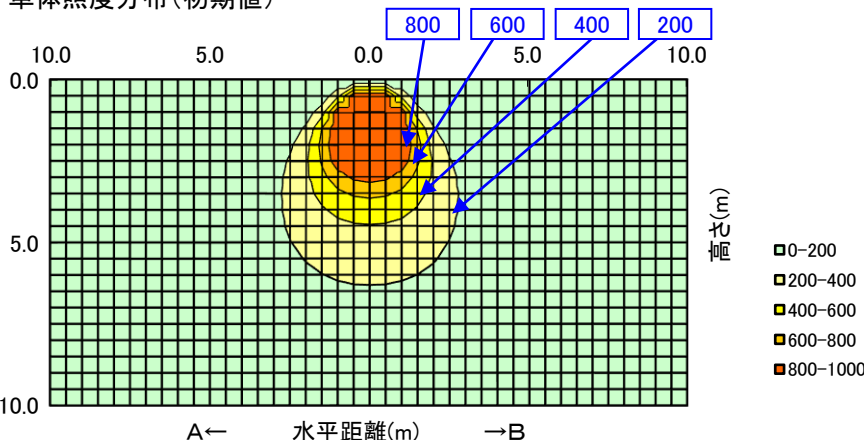
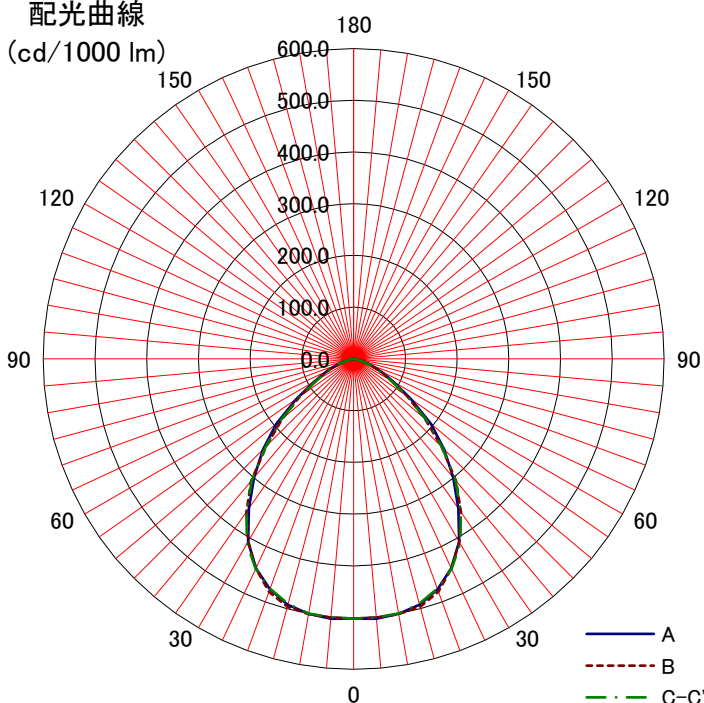


日立照明器具 照明特性																																																																																																																																								
名称: 高天井用LED器具	反射率	天井	80%			70%				50%			30%			0%																																																																																																																								
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%																																																																																																																								
		床	10%													0%																																																																																																																								
形式: WGMTE17AMN-J14B	室指数	固有照明率 S/H=1.0																																																																																																																																						
<備考>	0.6	0.66	0.56	0.50	0.65	0.56	0.50	0.45	0.55	0.49	0.45	0.54	0.49	0.45	0.43																																																																																																																									
	0.8	0.76	0.67	0.61	0.75	0.66	0.60	0.56	0.65	0.60	0.56	0.64	0.59	0.55	0.54																																																																																																																									
姿図 	1	0.82	0.74	0.68	0.81	0.73	0.67	0.63	0.72	0.67	0.63	0.70	0.66	0.62	0.61																																																																																																																									
	1.25	0.87	0.80	0.74	0.86	0.79	0.74	0.70	0.78	0.73	0.69	0.76	0.72	0.69	0.67																																																																																																																									
	1.5	0.91	0.84	0.79	0.90	0.84	0.79	0.75	0.82	0.78	0.74	0.80	0.77	0.74	0.72																																																																																																																									
	2	0.96	0.90	0.86	0.94	0.89	0.85	0.82	0.88	0.84	0.81	0.86	0.83	0.80	0.78																																																																																																																									
	2.5	0.98	0.94	0.90	0.97	0.93	0.89	0.86	0.91	0.88	0.85	0.89	0.86	0.84	0.82																																																																																																																									
	3	1.00	0.96	0.92	0.98	0.95	0.92	0.89	0.93	0.90	0.88	0.91	0.89	0.87	0.84																																																																																																																									
光源形式	4	1.02	0.99	0.96	1.00	0.98	0.95	0.93	0.96	0.93	0.91	0.94	0.92	0.90	0.88																																																																																																																									
-	5	1.03	1.01	0.99	1.02	1.00	0.98	0.96	0.98	0.96	0.94	0.96	0.94	0.93	0.90																																																																																																																									
器具光束	7	1.05	1.04	1.02	1.04	1.02	1.01	1.00	1.00	0.99	0.98	0.98	0.97	0.96	0.94																																																																																																																									
15,800 lm	10	1.07	1.06	1.05	1.06	1.05	1.04	1.03	1.02	1.02	1.01	1.00	1.00	0.99	0.96																																																																																																																									
器具効率 Ft= 100%		単体照度分布(初期値) 																																																																																																																																						
上方光束 Fu= 0%																																																																																																																																								
下方光束 Fd= 100%																																																																																																																																								
最大取付間隔		配光曲線 (cd/1000 lm) 																																																																																																																																						
A-A 1.20 H																																																																																																																																								
B-B 1.22 H																																																																																																																																								
保守率	良																0.83																																																																																																																							
	中																0.81																																																																																																																							
	否																0.76																																																																																																																							
光度 (cd/1000 lm)																	<table><tr><th></th><th>A-0</th><th>B-B</th><th>C-0</th><th>A'-0</th><th>C'-0</th></tr><tr><td>0</td><td>502</td><td>502</td><td>502</td><td></td><td></td></tr><tr><td>10</td><td>500</td><td>501</td><td>499</td><td></td><td></td></tr><tr><td>20</td><td>474</td><td>479</td><td>473</td><td></td><td></td></tr><tr><td>30</td><td>408</td><td>408</td><td>412</td><td></td><td></td></tr><tr><td>40</td><td>299</td><td>308</td><td>306</td><td></td><td></td></tr><tr><td>50</td><td>195</td><td>180</td><td>183</td><td></td><td></td></tr><tr><td>60</td><td>88</td><td>86</td><td>81</td><td></td><td></td></tr><tr><td>70</td><td>36</td><td>35</td><td>31</td><td></td><td></td></tr><tr><td>80</td><td>9</td><td>7</td><td>8</td><td></td><td></td></tr><tr><td>90</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>100</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>110</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>120</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>130</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>140</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>150</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>160</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>170</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>180</td><td></td><td></td><td></td><td></td><td></td></tr></table>																A-0	B-B	C-0	A'-0	C'-0	0	502	502	502			10	500	501	499			20	474	479	473			30	408	408	412			40	299	308	306			50	195	180	183			60	88	86	81			70	36	35	31			80	9	7	8			90						100						110						120						130						140						150						160		
	A-0	B-B	C-0	A'-0	C'-0																																																																																																																																			
0	502	502	502																																																																																																																																					
10	500	501	499																																																																																																																																					
20	474	479	473																																																																																																																																					
30	408	408	412																																																																																																																																					
40	299	308	306																																																																																																																																					
50	195	180	183																																																																																																																																					
60	88	86	81																																																																																																																																					
70	36	35	31																																																																																																																																					
80	9	7	8																																																																																																																																					
90																																																																																																																																								
100																																																																																																																																								
110																																																																																																																																								
120																																																																																																																																								
130																																																																																																																																								
140																																																																																																																																								
150																																																																																																																																								
160																																																																																																																																								
170																																																																																																																																								
180																																																																																																																																								