
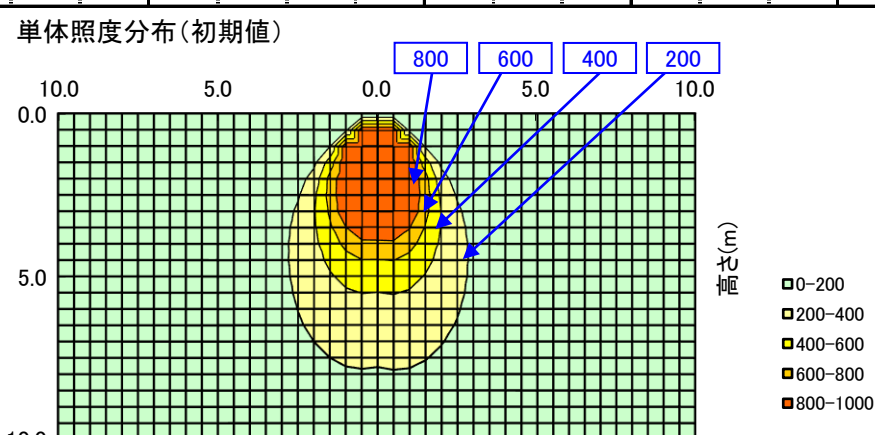
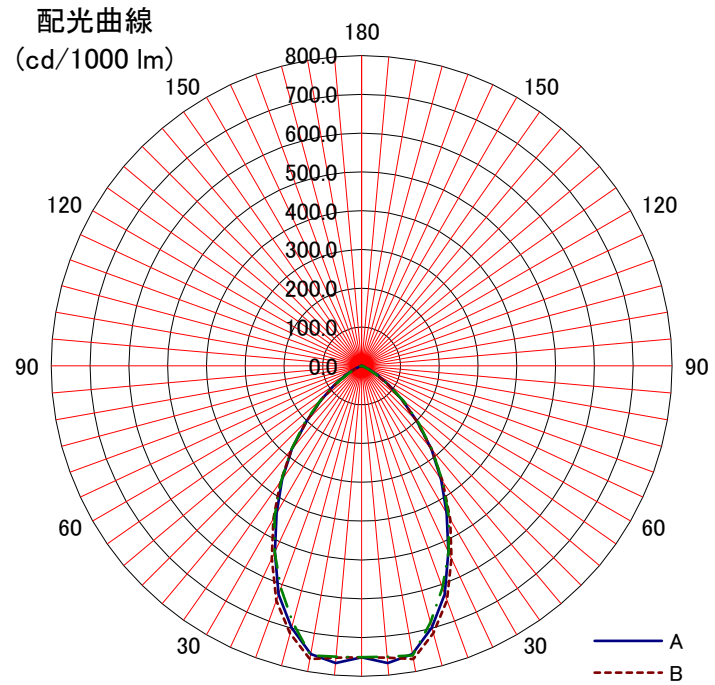


日立照明器具 照明特性

名称: 高天井用LED器具	反射率	天井	80%			70%				50%			30%			0%	
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
形式: WGMTE17ANN-J14B	室指数	床	10%														0%
		固有照明率 S/H=1.0															
〈備考〉	0.6	0.74	0.65	0.60	0.73	0.65	0.60	0.56	0.64	0.59	0.56	0.63	0.59	0.56	0.55		
	0.8	0.82	0.75	0.70	0.81	0.74	0.70	0.66	0.73	0.69	0.66	0.72	0.68	0.65	0.64		
姿図 	1	0.87	0.81	0.76	0.86	0.80	0.76	0.72	0.79	0.75	0.72	0.78	0.74	0.72	0.70		
	1.25	0.92	0.86	0.82	0.91	0.85	0.81	0.78	0.84	0.80	0.77	0.83	0.79	0.77	0.75		
	1.5	0.95	0.90	0.86	0.94	0.89	0.85	0.82	0.87	0.84	0.82	0.86	0.83	0.81	0.79		
	2	0.98	0.94	0.91	0.97	0.94	0.90	0.88	0.92	0.89	0.87	0.90	0.88	0.86	0.84		
	2.5	1.00	0.97	0.94	0.99	0.96	0.93	0.91	0.94	0.92	0.90	0.93	0.91	0.89	0.87		
	3	1.02	0.98	0.96	1.00	0.98	0.95	0.93	0.96	0.94	0.92	0.94	0.92	0.91	0.89		
光源形式 —	4	1.03	1.01	0.99	1.02	1.00	0.98	0.96	0.98	0.96	0.95	0.96	0.95	0.93	0.91		
	5	1.04	1.02	1.01	1.03	1.01	1.00	0.98	0.99	0.98	0.97	0.98	0.96	0.95	0.93		
器具光束 16,100 lm	7	1.06	1.05	1.03	1.05	1.04	1.02	1.01	1.02	1.01	1.00	1.00	0.99	0.98	0.96		
	10	1.07	1.06	1.06	1.06	1.05	1.05	1.04	1.03	1.03	1.02	1.01	1.01	1.00	0.98		
器具効率 Ft= 100%		単体照度分布 (初期値) 															
上方光束 Fu= 0%																	
下方光束 Fd= 100%																	
最大取付間隔		A← 水平距離(m) →B															
A-A 0.98 H																	
B-B 1.00 H																	
保守率	良	0.83	配光曲線 (cd/1000 lm) 														
	中	0.81															
	否	0.76															
光度 (cd/1000 lm)																	
	A-0	B-B	C-0	A'-0	C'-0												
0	751	751	751														
10	754	767	757														
20	627	643	609														
30	439	456	449														
40	280	281	282														
50	136	134	142														
60	47	41	40														
70	7	7	5														
80	1	1	2														
90																	
100																	
110																	
120																	
130																	
140																	
150																	
160																	
170																	
180																	