
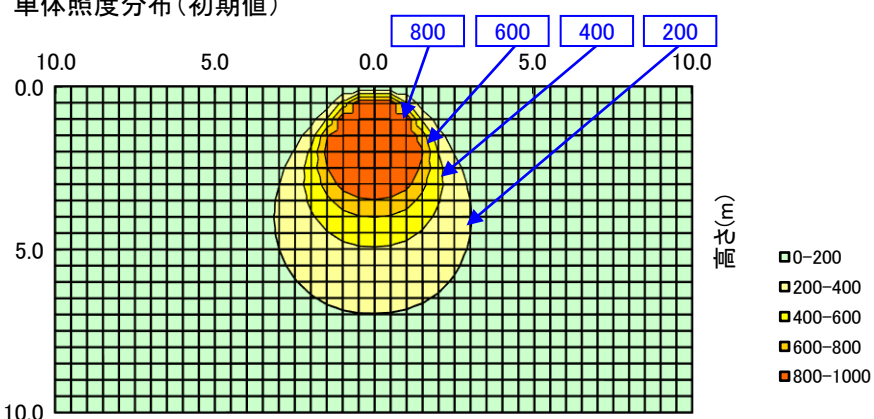
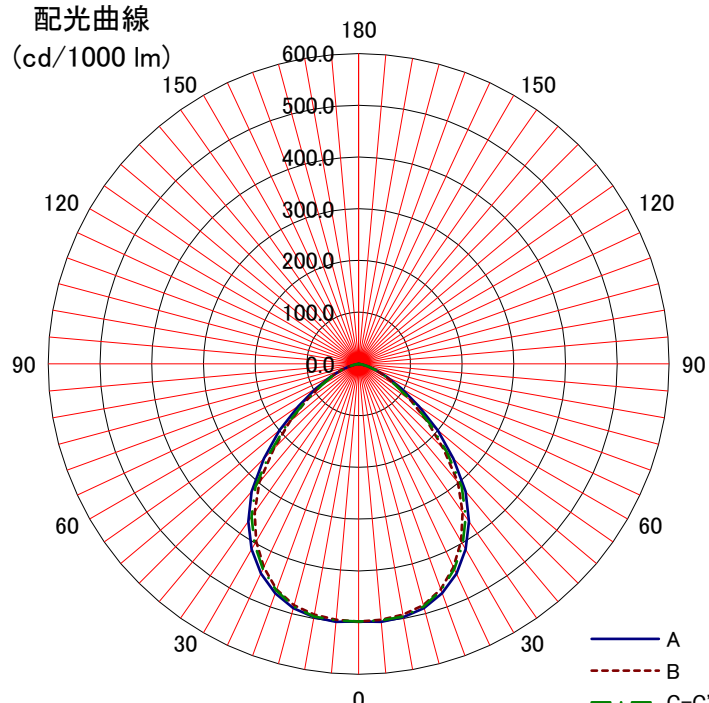


日立照明器具 照明特性

名称: 高天井用LED器具		反射率	天井	80%			70%			50%			30%			0%	
				壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%
形式: WGMTE22AMN-J14A		室指数	床	10%													0%
				固有照明率 S/H=1.0													
<備考> 配光角(広角)		0.6	0.66	0.56	0.49	0.65	0.55	0.49	0.45	0.54	0.49	0.45	0.54	0.48	0.45	0.43	
		0.8	0.76	0.66	0.60	0.74	0.66	0.60	0.55	0.65	0.59	0.55	0.64	0.59	0.55	0.53	
姿図 		1	0.82	0.73	0.67	0.80	0.73	0.67	0.63	0.71	0.66	0.62	0.70	0.65	0.62	0.60	
		1.25	0.87	0.79	0.74	0.86	0.79	0.73	0.69	0.77	0.73	0.69	0.76	0.72	0.68	0.66	
		1.5	0.91	0.84	0.79	0.89	0.83	0.79	0.75	0.82	0.77	0.74	0.80	0.76	0.73	0.71	
		2	0.95	0.90	0.86	0.94	0.89	0.85	0.82	0.87	0.84	0.81	0.86	0.83	0.80	0.78	
		2.5	0.98	0.93	0.90	0.96	0.92	0.89	0.86	0.90	0.87	0.85	0.89	0.86	0.84	0.82	
		3	0.99	0.95	0.92	0.98	0.94	0.91	0.89	0.93	0.90	0.87	0.91	0.88	0.86	0.84	
		4	1.02	0.98	0.96	1.00	0.97	0.95	0.93	0.95	0.93	0.91	0.93	0.92	0.90	0.87	
光源形式 -		5	1.03	1.01	0.98	1.02	1.00	0.97	0.95	0.97	0.96	0.94	0.95	0.94	0.93	0.90	
		器具光束 19,500 lm		7	1.05	1.03	1.02	1.04	1.02	1.01	0.99	1.00	0.99	0.98	0.98	0.97	0.96
10	1.07			1.06	1.04	1.05	1.04	1.03	1.03	1.02	1.01	1.01	1.00	1.00	0.99	0.96	
器具効率 Ft= 100%			単体照度分布(初期値)														
上方光束 Fu= 0%																	
下方光束 Fd= 100%																	
最大取付間隔																	
A-A 1.24 H																	
B-B 1.20 H																	
保守率	良	0.81	光度 (cd/1000 lm)														
	中	0.79															
	否	0.75															
光度 (cd/1000 lm)			A-0	B-B	C-0	A'-0	C'-0										
0	498	498	498														
10	497	492	496														
20	472	464	466														
30	414	396	402														
40	322	298	310														
50	200	174	180														
60	95	85	83														
70	35	35	36														
80	8	9	7														
90																	
100																	
110																	
120																	
130																	
140																	
150																	
160																	
170																	
180																	