
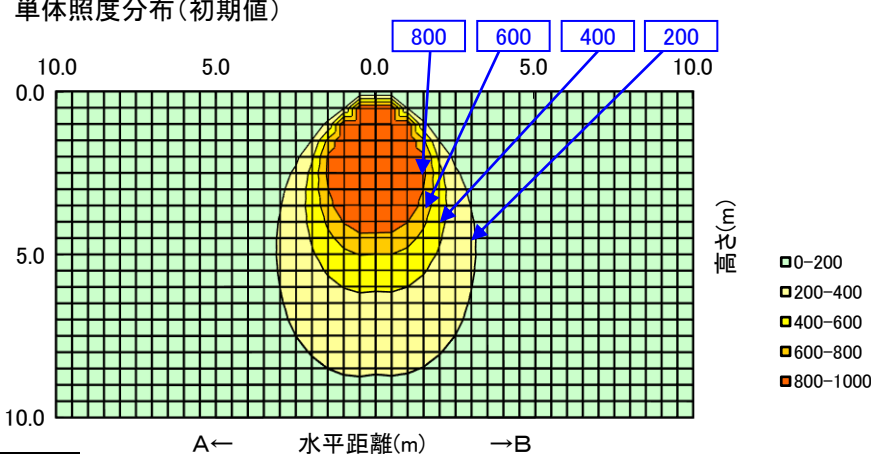
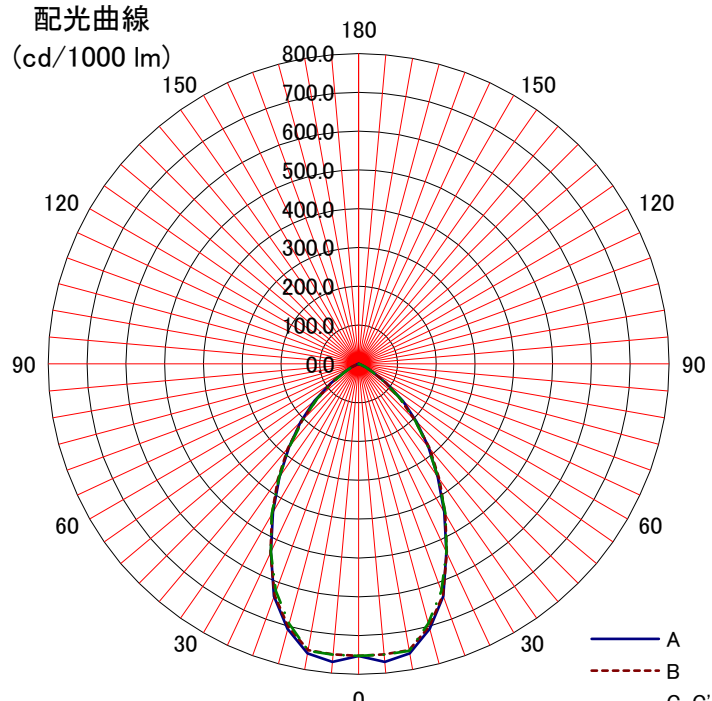
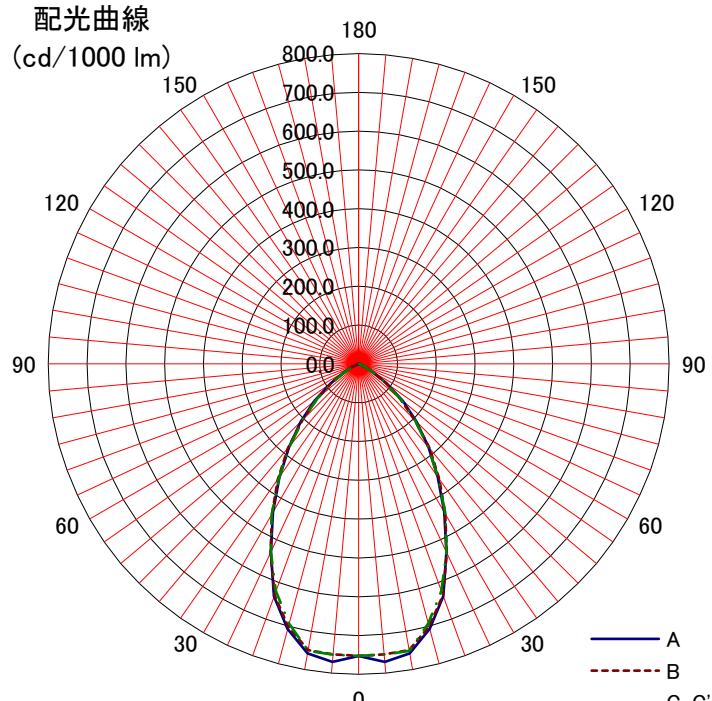


日立照明器具 照明特性

名称: 高天井用LED器具	天井 反射率	壁 70%	80%			70%				50%			30%			0%
			50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
			10%													0%
形式: WGMTE22ANN-J14B	室指数	固有照明率 S/H=1.0														
〈備考〉	0.6	0.74	0.66	0.60	0.73	0.65	0.60	0.56	0.64	0.60	0.56	0.64	0.59	0.56	0.55	
	0.8	0.83	0.75	0.70	0.81	0.75	0.70	0.66	0.73	0.69	0.66	0.73	0.69	0.66	0.64	
姿図 	1	0.88	0.81	0.76	0.87	0.80	0.76	0.72	0.79	0.75	0.72	0.78	0.75	0.72	0.70	
	1.25	0.92	0.86	0.82	0.91	0.85	0.81	0.78	0.84	0.80	0.78	0.83	0.80	0.77	0.75	
	1.5	0.95	0.90	0.86	0.94	0.89	0.85	0.82	0.88	0.85	0.82	0.86	0.84	0.81	0.79	
	2	0.99	0.95	0.91	0.98	0.94	0.91	0.88	0.92	0.90	0.87	0.91	0.88	0.86	0.85	
	2.5	1.01	0.97	0.94	0.99	0.96	0.94	0.91	0.95	0.92	0.90	0.93	0.91	0.89	0.87	
	3	1.02	0.99	0.96	1.01	0.98	0.95	0.93	0.96	0.94	0.92	0.94	0.93	0.91	0.89	
	4	1.03	1.01	0.99	1.02	1.00	0.98	0.96	0.98	0.96	0.95	0.96	0.95	0.94	0.91	
光源形式 -	5	1.05	1.03	1.01	1.03	1.02	1.00	0.99	1.00	0.98	0.97	0.98	0.97	0.96	0.93	
器具光束 20,000 lm	7	1.06	1.05	1.04	1.05	1.04	1.03	1.02	1.02	1.01	1.00	1.00	0.99	0.98	0.96	
	10	1.08	1.07	1.06	1.06	1.06	1.05	1.04	1.04	1.03	1.02	1.02	1.01	1.01	0.98	
器具効率 Ft= 100%		単体照度分布(初期値) 														
上方光束 Fu= 0%																
下方光束 Fd= 100%																
最大取付間隔		A← 水平距離(m) →B 														
A-A 0.98 H																
B-B 0.98 H																
保守率																
良	0.83	配光曲線 (cd/1000 lm) 														
中	0.81															
否	0.76															
光度 (cd/1000 lm)		A-0 B-B C-0 A'-0 C'-0														
0	752	752	752													
10	758	749	751													
20	637	634	623													
30	441	447	448													
40	279	284	277													
50	149	140	141													
60	44	45	39													
70	6	7	5													
80	2	1	3													
90																
100																
110																
120																
130																
140																
150																
160																
170																
180																