
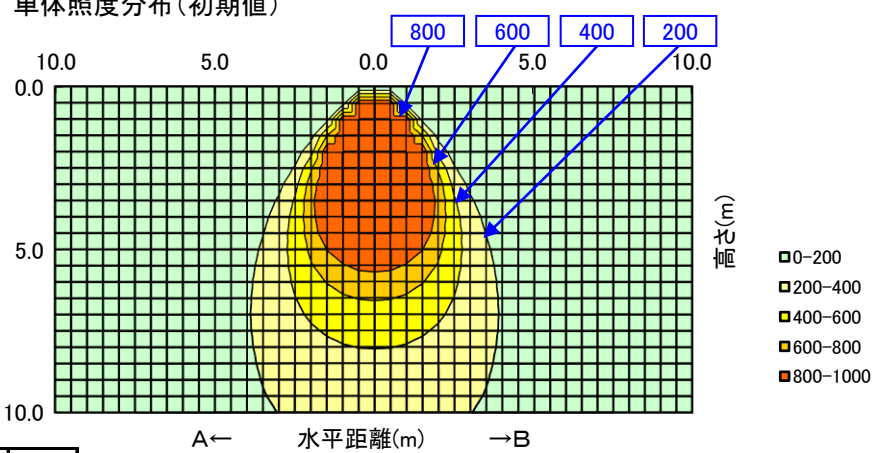
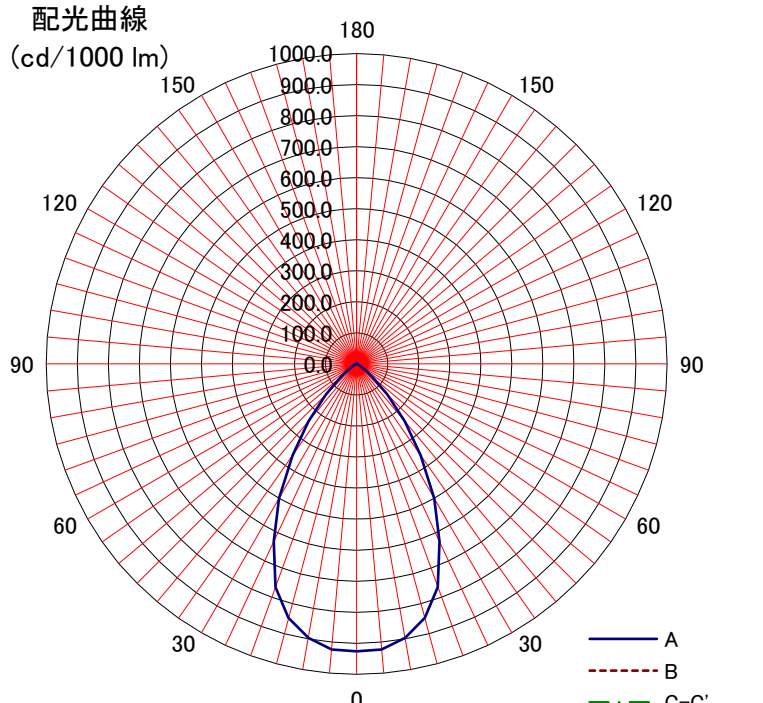


日立照明器具 照明特性

名称: 高天井用LED器具		反射率	天井 壁 床	80%			70%				50%			30%			0%																																																																																																																								
				70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%																																																																																																																								
形式: WGMTE2803NN-J14A		室指数	固有照明率 S/H=1.0															0%																																																																																																																							
			10%															0%																																																																																																																							
<備考>		0.6	0.80	0.73	0.68	0.79	0.72	0.68	0.65	0.71	0.67	0.65	0.71	0.67	0.65	0.63																																																																																																																									
		0.8	0.87	0.81	0.77	0.86	0.80	0.76	0.73	0.79	0.76	0.73	0.79	0.75	0.73	0.72																																																																																																																									
姿図 		1	0.91	0.86	0.82	0.90	0.85	0.81	0.79	0.84	0.81	0.78	0.83	0.80	0.78	0.77																																																																																																																									
		1.25	0.95	0.90	0.86	0.94	0.89	0.86	0.83	0.88	0.85	0.83	0.87	0.84	0.82	0.81																																																																																																																									
		1.5	0.97	0.93	0.90	0.96	0.92	0.89	0.87	0.91	0.88	0.86	0.90	0.87	0.86	0.84																																																																																																																									
		2	1.00	0.97	0.94	0.99	0.96	0.94	0.91	0.95	0.92	0.91	0.93	0.91	0.90	0.88																																																																																																																									
		2.5	1.02	0.99	0.96	1.01	0.98	0.96	0.94	0.96	0.94	0.93	0.95	0.93	0.92	0.90																																																																																																																									
		3	1.03	1.00	0.98	1.02	0.99	0.97	0.95	0.97	0.96	0.94	0.96	0.94	0.93	0.91																																																																																																																									
		4	1.04	1.02	1.00	1.03	1.01	0.99	0.98	0.99	0.98	0.96	0.97	0.96	0.95	0.93																																																																																																																									
光源形式		5	1.05	1.03	1.02	1.04	1.02	1.01	1.00	1.00	0.99	0.98	0.99	0.98	0.97	0.94																																																																																																																									
器具光束 28,000 lm		7	1.06	1.05	1.04	1.05	1.04	1.03	1.02	1.02	1.01	1.01	1.00	1.00	0.99	0.97																																																																																																																									
		10	1.07	1.07	1.06	1.06	1.06	1.05	1.05	1.04	1.03	1.03	1.02	1.01	1.01	0.98																																																																																																																									
器具効率 Ft= 100%			単体照度分布(初期値) 																																																																																																																																						
上方光束 Fu= 0%																																																																																																																																									
下方光束 Fd= 100%																																																																																																																																									
最大取付間隔			光度 (cd/1000 lm) <table><tr><td></td><td>A-0</td><td>B-B</td><td>C-0</td><td>A'-0</td><td>C'-0</td></tr><tr><td>0</td><td>926</td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td>896</td><td></td><td></td><td></td><td></td></tr><tr><td>20</td><td>765</td><td></td><td></td><td></td><td></td></tr><tr><td>30</td><td>500</td><td></td><td></td><td></td><td></td></tr><tr><td>40</td><td>241</td><td></td><td></td><td></td><td></td></tr><tr><td>50</td><td>68</td><td></td><td></td><td></td><td></td></tr><tr><td>60</td><td>16</td><td></td><td></td><td></td><td></td></tr><tr><td>70</td><td>5</td><td></td><td></td><td></td><td></td></tr><tr><td>80</td><td>1</td><td></td><td></td><td></td><td></td></tr><tr><td>90</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>100</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>110</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>120</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>130</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>140</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>150</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>160</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>170</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>180</td><td></td><td></td><td></td><td></td><td></td></tr></table>																A-0	B-B	C-0	A'-0	C'-0	0	926					10	896					20	765					30	500					40	241					50	68					60	16					70	5					80	1					90						100						110						120						130						140						150						160						170						180					
	A-0	B-B																C-0	A'-0	C'-0																																																																																																																					
0	926																																																																																																																																								
10	896																																																																																																																																								
20	765																																																																																																																																								
30	500																																																																																																																																								
40	241																																																																																																																																								
50	68																																																																																																																																								
60	16																																																																																																																																								
70	5																																																																																																																																								
80	1																																																																																																																																								
90																																																																																																																																									
100																																																																																																																																									
110																																																																																																																																									
120																																																																																																																																									
130																																																																																																																																									
140																																																																																																																																									
150																																																																																																																																									
160																																																																																																																																									
170																																																																																																																																									
180																																																																																																																																									
A-A 0.96 H																																																																																																																																									
B-B H																																																																																																																																									
保守率	良	0.81	配光曲線 (cd/1000 lm) 																																																																																																																																						
	中	0.79																																																																																																																																							
	否	0.75																																																																																																																																							