
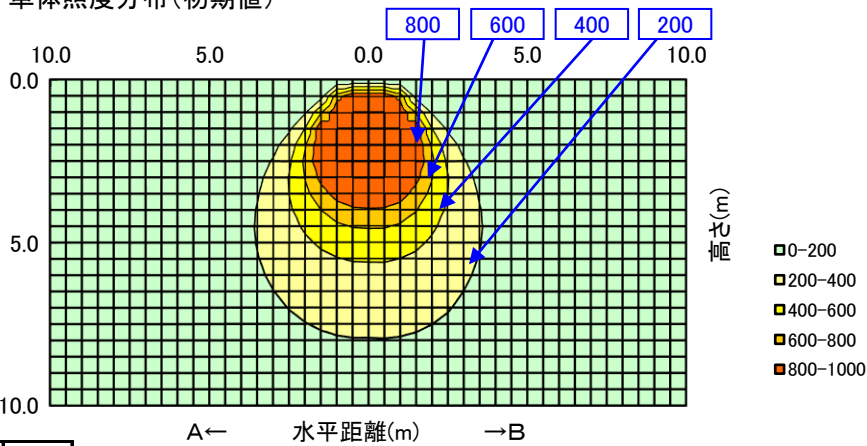
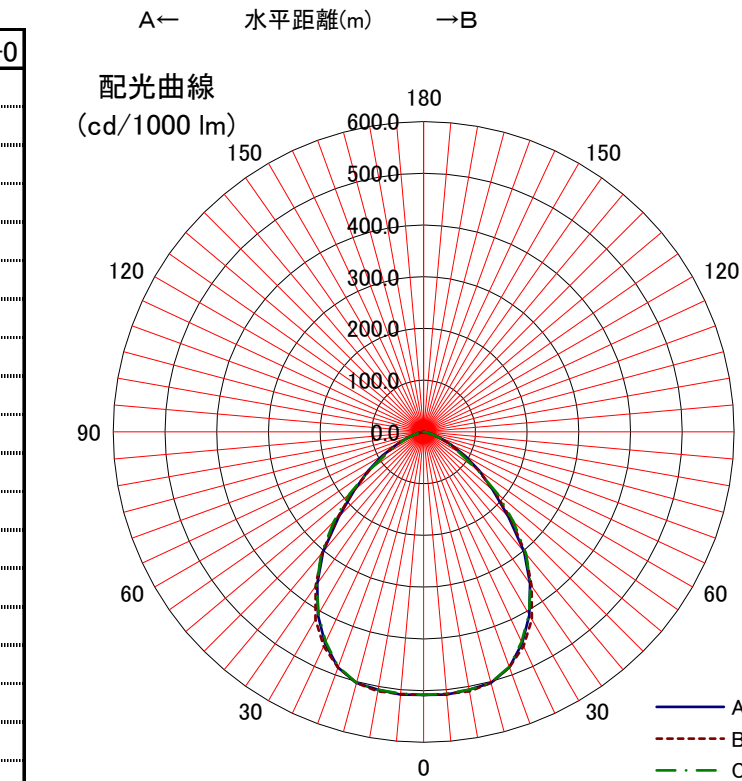


日立照明器具 照明特性																				
名称: 高天井用LED器具	反射率	天井	80%			70%				50%			30%			0%				
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%				
		床	10%														0%			
形式: WGMTE28BMN-J24A	室指数	固有照明率 S/H=1.0																		
<備考> 	0.6	0.65	0.55	0.48	0.64	0.54	0.48	0.43	0.53	0.47	0.43	0.52	0.47	0.43	0.41					
	0.8	0.75	0.65	0.59	0.74	0.65	0.59	0.54	0.63	0.58	0.54	0.62	0.57	0.53	0.52					
	1	0.81	0.72	0.66	0.80	0.72	0.66	0.61	0.70	0.65	0.61	0.69	0.64	0.61	0.59					
	1.25	0.86	0.79	0.73	0.85	0.78	0.72	0.68	0.76	0.71	0.68	0.75	0.71	0.67	0.65					
	1.5	0.90	0.83	0.78	0.89	0.82	0.78	0.74	0.81	0.76	0.73	0.79	0.75	0.72	0.70					
	2	0.95	0.89	0.85	0.93	0.88	0.84	0.81	0.87	0.83	0.80	0.85	0.82	0.79	0.77					
	2.5	0.97	0.93	0.89	0.96	0.92	0.88	0.85	0.90	0.87	0.84	0.88	0.85	0.83	0.81					
光源形式	3	0.99	0.95	0.92	0.98	0.94	0.91	0.88	0.92	0.89	0.87	0.90	0.88	0.86	0.83					
	4	1.01	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.91	0.93	0.91	0.89	0.87					
器具光束 25,100 lm	5	1.03	1.00	0.98	1.02	0.99	0.97	0.95	0.97	0.95	0.94	0.95	0.94	0.92	0.90					
	7	1.05	1.03	1.02	1.04	1.02	1.01	0.99	1.00	0.99	0.97	0.98	0.97	0.96	0.93					
	10	1.07	1.05	1.04	1.05	1.04	1.03	1.02	1.02	1.01	1.01	1.00	0.99	0.99	0.96					
器具効率 Ft= 100%		単体照度分布(初期値) 																		
上方光束 Fu= 0%																				
下方光束 Fd= 100%																				
最大取付間隔		A← 水平距離(m) → B																		
A-A 1.22 H																				
B-B 1.22 H																				
保守率	良																0.83			
	中	0.81																		
	否	0.76																		
光度 (cd/1000 lm)		配光曲線 (cd/1000 lm) 																		
	A-0																B-B	C-0	A'-0	C'-0
0	508																508	508		
10	506																509	506		
20	485																485	483		
30	409																418	407		
40	303																306	308		
50	174																179	187		
60	93																86	80		
70	32																34	31		
80	6																6	6		
90																				
100																				
110																				
120																				
130																				
140																				
150																				
160																				
170																				
180																				