
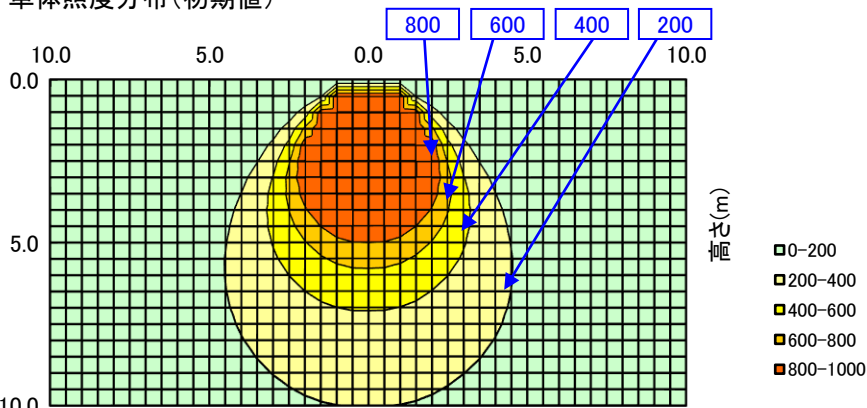
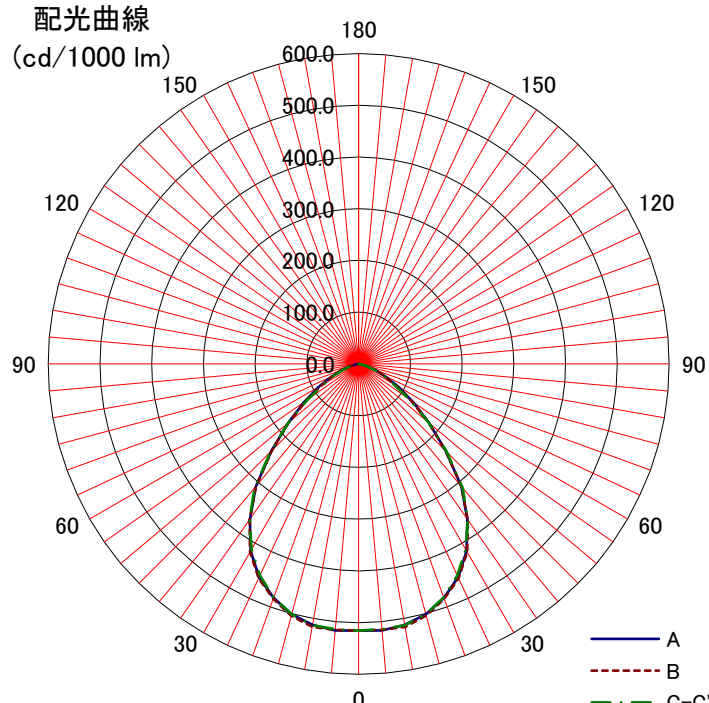


日立照明器具 照明特性																	
名称: 高天井用LED器具	反射率	天井	80%			70%				50%			30%			0%	
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
	形式: WGMTE44BMN-J24A	床	10%														0%
姿図  光源形式 - 器具光束 40,250 lm	室指数	固有照明率 S/H=1.0															
	<備考>	0.6	0.65	0.55	0.48	0.64	0.54	0.48	0.43	0.53	0.47	0.43	0.52	0.47	0.43	0.41	
		0.8	0.75	0.65	0.59	0.73	0.65	0.58	0.54	0.63	0.58	0.54	0.62	0.57	0.53	0.52	
		1	0.81	0.72	0.66	0.79	0.71	0.66	0.61	0.70	0.65	0.61	0.69	0.64	0.60	0.59	
		1.25	0.86	0.78	0.73	0.85	0.78	0.72	0.68	0.76	0.71	0.67	0.75	0.70	0.67	0.65	
		1.5	0.90	0.83	0.78	0.88	0.82	0.77	0.73	0.81	0.76	0.73	0.79	0.75	0.72	0.70	
		2	0.95	0.89	0.85	0.93	0.88	0.84	0.81	0.86	0.83	0.80	0.85	0.82	0.79	0.77	
		2.5	0.97	0.93	0.89	0.96	0.92	0.88	0.85	0.90	0.87	0.84	0.88	0.85	0.83	0.81	
		3	0.99	0.95	0.91	0.98	0.94	0.91	0.88	0.92	0.89	0.87	0.90	0.88	0.85	0.83	
		4	1.01	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.90	0.93	0.91	0.89	0.87	
		5	1.03	1.00	0.98	1.01	0.99	0.97	0.95	0.97	0.95	0.93	0.95	0.93	0.92	0.89	
		7	1.05	1.03	1.01	1.04	1.02	1.00	0.99	1.00	0.98	0.97	0.98	0.97	0.96	0.93	
		10	1.06	1.05	1.04	1.05	1.04	1.03	1.02	1.02	1.01	1.00	1.00	0.99	0.99	0.96	
	器具効率 Ft= 100%		単体照度分布(初期値) 														
	上方光束 Fu= 0%																
	下方光束 Fd= 100%																
最大取付間隔		光度 (cd/1000 lm) 															
A-A 1.22 H																	
B-B 1.24 H																	
保守率	良	0.83															
	中	0.81															
	否	0.76															
光度 (cd/1000 lm)		A-0	B-B	C-0	A'-0	C'-0											
0		516	516	516													
10		512	516	513													
20		481	483	480													
30		418	420	414													
40		309	309	313													
50		178	176	178													
60		89	83	77													
70		34	35	31													
80		6	6	6													
90																	
100																	
110																	
120																	
130																	
140																	
150																	
160																	
170																	
180																	