
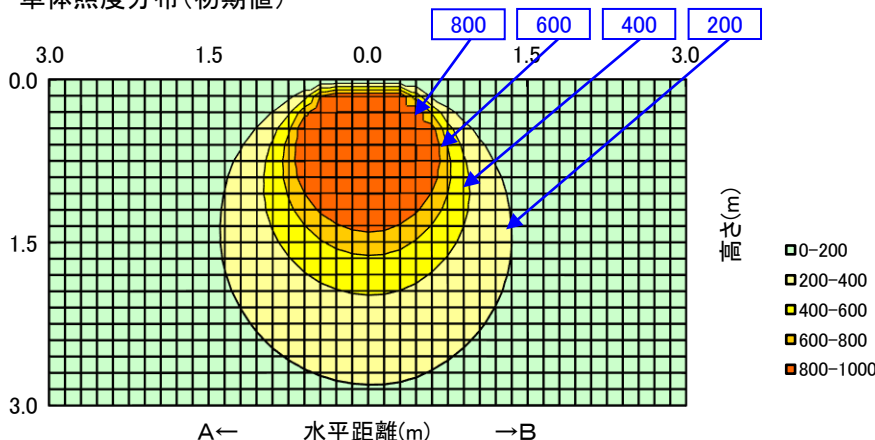
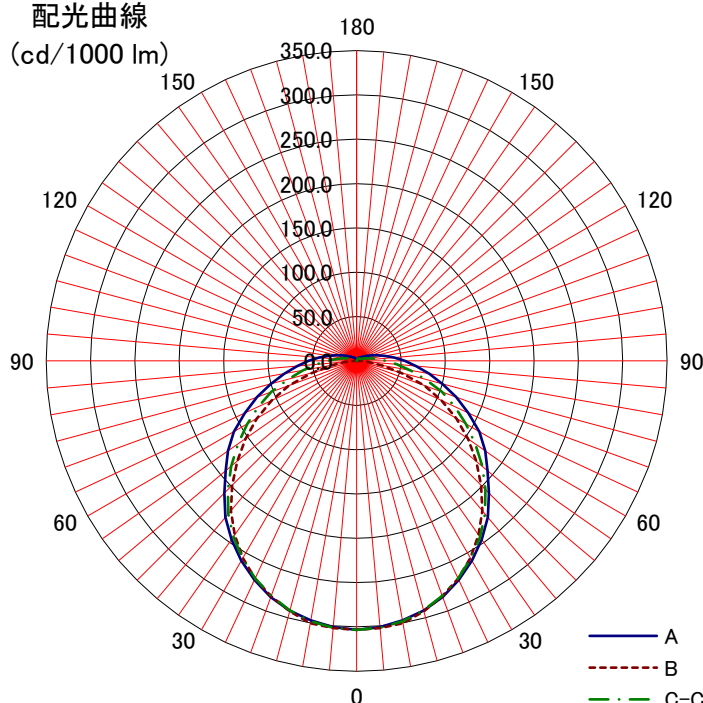


日立照明器具 照明特性

名称: 交換形LED逆富士形	反射率	天井	80%			70%				50%			30%			0%	
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
		床	10%														
形式: WGN4A	室指数	固有照明率 S/H=1.0															
<備考> 防湿・防雨形 (オイルミスト対応)	0.6	0.56	0.44	0.36	0.54	0.43	0.35	0.30	0.41	0.35	0.30	0.40	0.34	0.29	0.27		
	0.8	0.65	0.53	0.45	0.63	0.52	0.45	0.39	0.51	0.44	0.39	0.49	0.43	0.38	0.35		
姿図 	1	0.71	0.60	0.52	0.69	0.59	0.52	0.46	0.57	0.50	0.45	0.55	0.49	0.44	0.42		
	1.25	0.77	0.67	0.59	0.75	0.66	0.59	0.53	0.63	0.57	0.52	0.61	0.55	0.51	0.48		
	1.5	0.81	0.72	0.65	0.79	0.71	0.64	0.59	0.68	0.62	0.57	0.66	0.61	0.56	0.53		
	2	0.87	0.79	0.73	0.85	0.78	0.72	0.67	0.75	0.70	0.65	0.72	0.68	0.64	0.60		
	2.5	0.91	0.84	0.78	0.88	0.82	0.77	0.72	0.79	0.74	0.70	0.76	0.72	0.69	0.65		
	3	0.93	0.87	0.82	0.91	0.85	0.80	0.76	0.82	0.78	0.74	0.79	0.75	0.72	0.69		
光源形式 WGE405NE-N14A	4	0.96	0.91	0.87	0.94	0.89	0.85	0.82	0.86	0.83	0.80	0.83	0.80	0.77	0.74		
	5	0.98	0.94	0.90	0.96	0.92	0.89	0.86	0.89	0.86	0.83	0.86	0.83	0.81	0.77		
器具光束 5,200 lm	7	1.01	0.98	0.95	0.99	0.96	0.93	0.91	0.93	0.90	0.88	0.89	0.88	0.86	0.82		
	10	1.03	1.01	0.99	1.01	0.99	0.97	0.95	0.96	0.94	0.92	0.92	0.91	0.90	0.86		
器具効率 Ft= 100%		単体照度分布(初期値) 															
上方光束 Fu= 5.2%																	
下方光束 Fd= 94.8%																	
最大取付間隔																	
A-A 1.28 H																	
B-B 1.26 H																	
保守率	良																
	中	0.86															
	否	0.81															
光度 (cd/1000 lm)		A-0	B-B	C-0	A'-0	C'-0	配光曲線 (cd/1000 lm) 										
	0	303	303	303													
	10	297	300	298													
	20	283	282	282													
	30	260	257	257													
	40	230	221	225													
	50	193	176	185													
	60	160	130	142													
	70	119	81	102													
	80	83	30	62													
	90	54	1	33													
	100	33		17													
	110	18		7													
	120	11		5													
	130	6		4													
	140	4		3													
	150	4		2													
	160																
	170																
	180																