
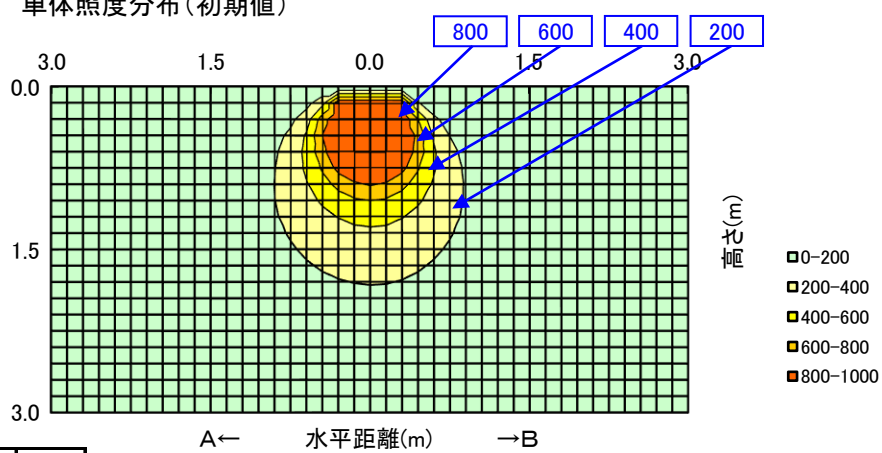


日立照明器具 照明特性

名称: 交換形LED逆富士形	天井	反射率	80%			70%				50%			30%			0%			
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
																		床	
形式: WGN4B			10%																0%
	室指数	固有照明率 S/H=1.0																	
<備考> 防湿・防雨形 (オイルミスト対応)	0.6	0.56	0.44	0.36	0.54	0.43	0.35	0.30	0.41	0.35	0.30	0.40	0.34	0.29	0.27				
	0.8	0.65	0.53	0.45	0.63	0.52	0.45	0.39	0.51	0.44	0.39	0.49	0.43	0.38	0.35				
姿図 	1	0.71	0.60	0.52	0.69	0.59	0.52	0.46	0.57	0.50	0.45	0.55	0.49	0.44	0.42				
	1.25	0.77	0.67	0.59	0.75	0.66	0.59	0.53	0.63	0.57	0.52	0.61	0.55	0.51	0.48				
	1.5	0.81	0.72	0.65	0.79	0.71	0.64	0.59	0.68	0.62	0.57	0.66	0.61	0.56	0.53				
	2	0.87	0.79	0.73	0.85	0.78	0.72	0.67	0.75	0.70	0.65	0.72	0.68	0.64	0.60				
	2.5	0.91	0.84	0.78	0.88	0.82	0.77	0.72	0.79	0.74	0.70	0.76	0.72	0.69	0.65				
	3	0.93	0.87	0.82	0.91	0.85	0.80	0.76	0.82	0.78	0.74	0.79	0.75	0.72	0.69				
光源形式 WGE402NE-N14A	4	0.96	0.91	0.87	0.94	0.89	0.85	0.82	0.86	0.83	0.80	0.83	0.80	0.77	0.74				
	5	0.98	0.94	0.90	0.96	0.92	0.89	0.86	0.89	0.86	0.83	0.86	0.83	0.81	0.77				
器具光束 2,200 lm	7	1.01	0.98	0.95	0.99	0.96	0.93	0.91	0.93	0.90	0.88	0.89	0.88	0.86	0.82				
	10	1.03	1.01	0.99	1.01	0.99	0.97	0.95	0.96	0.94	0.92	0.92	0.91	0.90	0.86				
器具効率 Ft= 100%		単体照度分布(初期値) 																	
上方光束 Fu= 5.2%																			
下方光束 Fd= 94.8%																			
最大取付間隔																			
A-A 1.28 H																			
B-B 1.26 H																			
保守率	良	0.88																	
	中	0.86																	
	否	0.81																	
光度 (cd/1000 lm)																			
	A-0 B-B C-0 A'-0 C'-0																		
	0 303 303 303																		
	10 297 300 298																		
	20 283 282 282																		
	30 260 257 257																		
	40 230 221 225																		
	50 193 176 185																		
	60 160 130 142																		
	70 119 81 102																		
	80 83 30 62																		
	90 54 1 33																		
	100 33 17																		
	110 18 7																		
	120 11 5																		
	130 6 4																		
	140 4 3																		
	150 4 2																		
	160																		
	170																		
	180																		
		配光曲線 (cd/1000 lm) 