
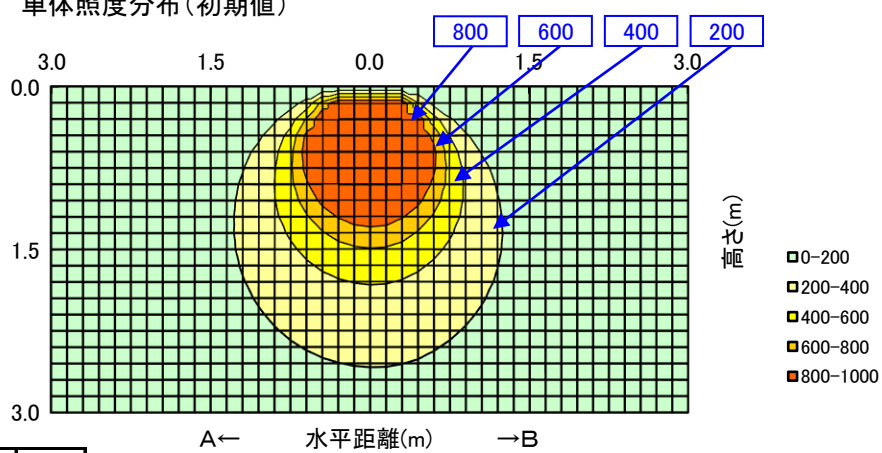
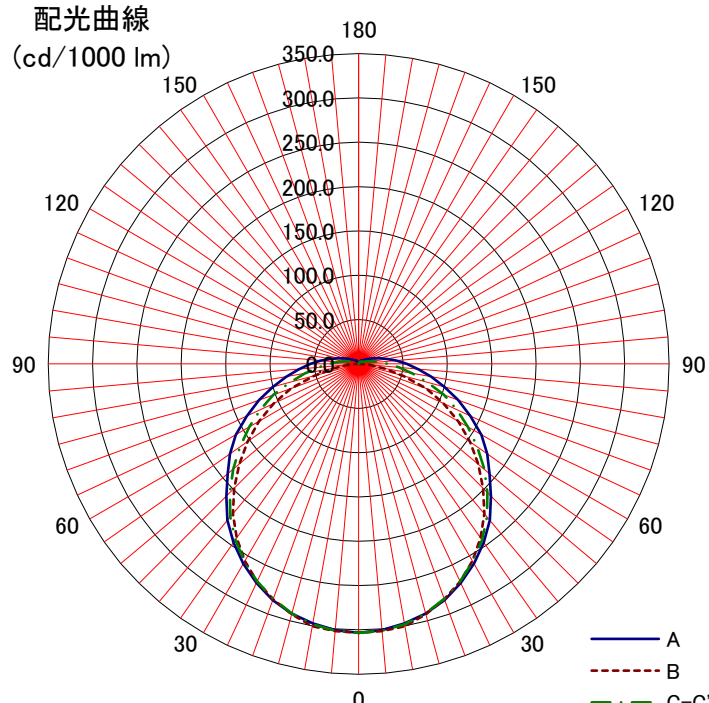


日立照明器具 照明特性

名称: 交換形LED逆富士形	反射率	天井	80%			70%				50%			30%			0%	
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
		床	10%														0%
形式: WGN4B	室指数	固有照明率 S/H=1.0															
<備考> 防湿・防雨形 (オイルミスト対応)	0.6	0.56	0.44	0.36	0.54	0.43	0.35	0.30	0.41	0.35	0.30	0.40	0.34	0.29	0.27		
	0.8	0.65	0.53	0.45	0.63	0.52	0.45	0.39	0.51	0.44	0.39	0.49	0.43	0.38	0.35		
姿図 	1	0.71	0.60	0.52	0.69	0.59	0.52	0.46	0.57	0.50	0.45	0.55	0.49	0.44	0.42		
	1.25	0.77	0.67	0.59	0.75	0.66	0.59	0.53	0.63	0.57	0.52	0.61	0.55	0.51	0.48		
	1.5	0.81	0.72	0.65	0.79	0.71	0.64	0.59	0.68	0.62	0.57	0.66	0.61	0.56	0.53		
	2	0.87	0.79	0.73	0.85	0.78	0.72	0.67	0.75	0.70	0.65	0.72	0.68	0.64	0.60		
	2.5	0.91	0.84	0.78	0.88	0.82	0.77	0.72	0.79	0.74	0.70	0.76	0.72	0.69	0.65		
	3	0.93	0.87	0.82	0.91	0.85	0.80	0.76	0.82	0.78	0.74	0.79	0.75	0.72	0.69		
光源形式 WGE404NE-N14A	4	0.96	0.91	0.87	0.94	0.89	0.85	0.82	0.86	0.83	0.80	0.83	0.80	0.77	0.74		
	5	0.98	0.94	0.90	0.96	0.92	0.89	0.86	0.89	0.86	0.83	0.86	0.83	0.81	0.77		
器具光束 4,400 lm	7	1.01	0.98	0.95	0.99	0.96	0.93	0.91	0.93	0.90	0.88	0.89	0.88	0.86	0.82		
	10	1.03	1.01	0.99	1.01	0.99	0.97	0.95	0.96	0.94	0.92	0.92	0.91	0.90	0.86		
器具効率 Ft= 100%		単体照度分布(初期値) 															
上方光束 Fu= 5.2%																	
下方光束 Fd= 94.8%																	
最大取付間隔																	
A-A 1.28 H																	
B-B 1.26 H																	
保守率	良	0.88															
	中	0.86															
	否	0.81															
光度 (cd/1000 lm)		配光曲線 (cd/1000 lm) 															
	A-0 B-B C-0 A'-0 C'-0																
0	303 303 303																
10	297 300 298																
20	283 282 282																
30	260 257 257																
40	230 221 225																
50	193 176 185																
60	160 130 142																
70	119 81 102																
80	83 30 62																
90	54 1 33																
100	33 17																
110	18 7																
120	11 5																
130	6 4																
140	4 3																
150	4 2																
160																	
170																	
180																	