
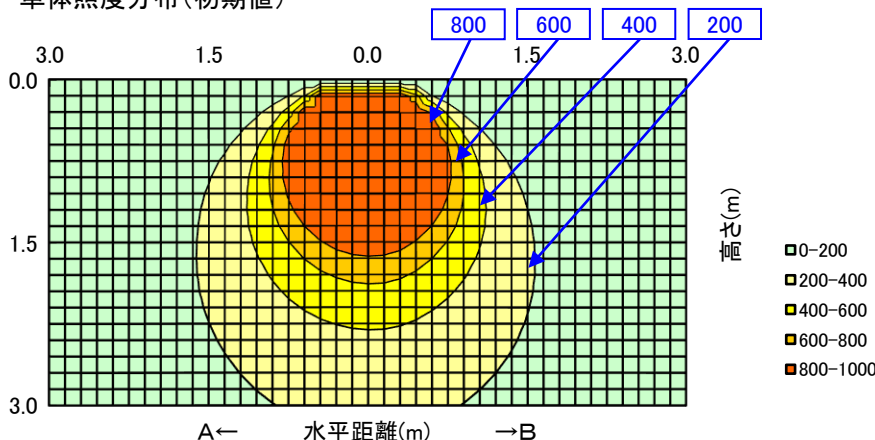
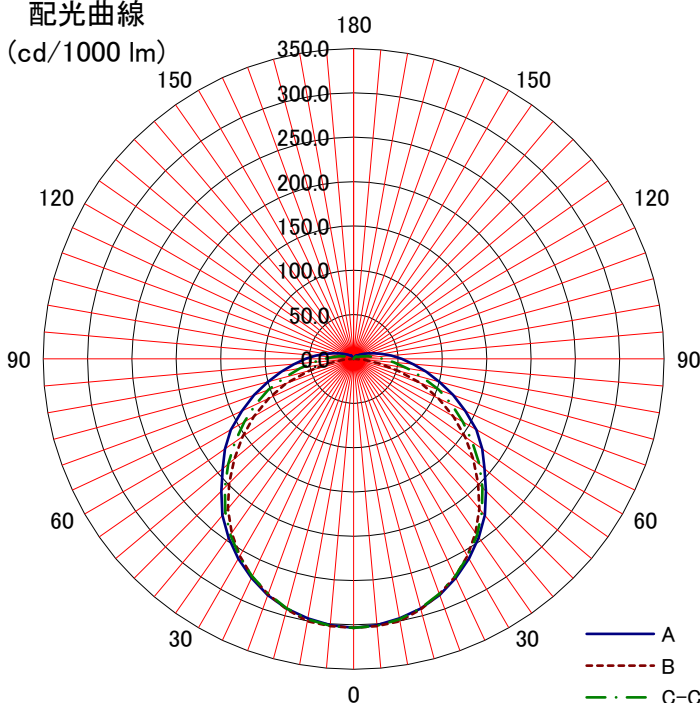


日立照明器具 照明特性

名称: 交換形LEDトラフ形	反射率	天井	80%			70%				50%			30%			0%				
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%				
		床	10%															0%		
形式: WGP4A	室指数	固有照明率 S/H=1.0																		
<備考> 防湿・防雨形 (オイルミスト対応)	0.6	0.56	0.44	0.36	0.54	0.43	0.35	0.30	0.41	0.35	0.30	0.40	0.34	0.29	0.27					
	0.8	0.65	0.53	0.45	0.63	0.52	0.45	0.39	0.51	0.44	0.39	0.49	0.43	0.38	0.35					
姿図 	1	0.71	0.60	0.52	0.69	0.59	0.52	0.46	0.57	0.50	0.45	0.55	0.49	0.44	0.42					
	1.25	0.77	0.67	0.59	0.75	0.66	0.59	0.53	0.63	0.57	0.52	0.61	0.55	0.51	0.48					
	1.5	0.81	0.72	0.65	0.79	0.71	0.64	0.59	0.68	0.62	0.57	0.66	0.61	0.56	0.53					
	2	0.87	0.79	0.73	0.85	0.78	0.72	0.67	0.75	0.70	0.65	0.72	0.68	0.64	0.60					
	2.5	0.91	0.84	0.78	0.88	0.82	0.77	0.72	0.79	0.74	0.70	0.76	0.72	0.69	0.65					
	3	0.93	0.87	0.82	0.91	0.85	0.80	0.76	0.82	0.78	0.74	0.79	0.75	0.72	0.69					
光源形式	4	0.96	0.91	0.87	0.94	0.89	0.85	0.82	0.86	0.83	0.80	0.83	0.80	0.77	0.74					
WGE407NE-N14A	5	0.98	0.94	0.90	0.96	0.92	0.89	0.86	0.89	0.86	0.83	0.86	0.83	0.81	0.77					
器具光束	7	1.01	0.98	0.95	0.99	0.96	0.93	0.91	0.93	0.90	0.88	0.89	0.88	0.86	0.82					
7,000 lm	10	1.03	1.01	0.99	1.01	0.99	0.97	0.95	0.96	0.94	0.92	0.92	0.91	0.90	0.86					
器具効率 Ft= 100%		単体照度分布(初期値) 																		
上方光束 Fu= 5.2%																				
下方光束 Fd= 94.8%																				
最大取付間隔																				
A-A 1.28 H																				
B-B 1.26 H																				
保守率	良																0.88			
	中																0.86			
	否	0.81																		
光度 (cd/1000 lm)		配光曲線 (cd/1000 lm) 																		
	A-0																B-B	C-0	A'-0	C'-0
0	303																303	303		
10	297																300	298		
20	283																282	282		
30	260																257	257		
40	230																221	225		
50	193																176	185		
60	160																130	142		
70	119																81	102		
80	83																30	62		
90	54																1	33		
100	33																	17		
110	18																	7		
120	11																	5		
130	6																	4		
140	4																	3		
150	4		2																	
160																				
170																				
180																				