

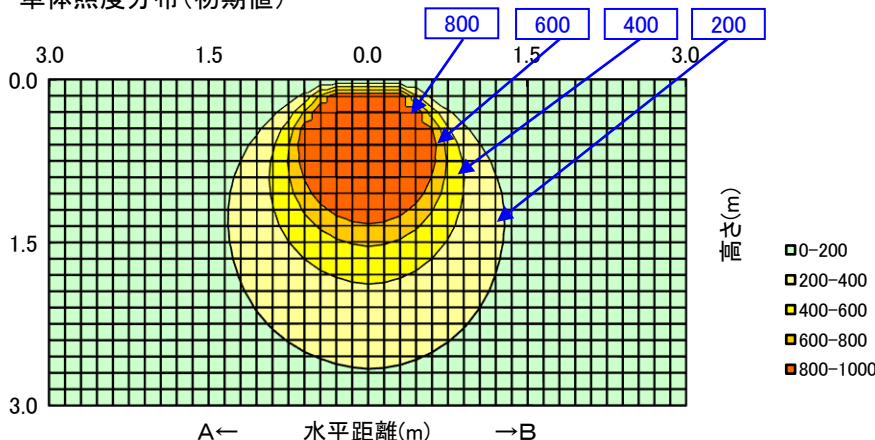


日立照明器具 照明特性

名称: 交換形LED笠付形	反射率	天井 壁 床	80%			70%				50%			30%			0%				
			70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%				
			10%														0%			
形式: WGP4B	室指数	固有照明率 S/H=1.0																		
＜備考＞ 防湿・防雨形 (オイルミスト対応)	0.6	0.57	0.45	0.37	0.56	0.44	0.37	0.32	0.43	0.36	0.31	0.42	0.36	0.31	0.29					
	0.8	0.67	0.55	0.47	0.65	0.54	0.47	0.41	0.53	0.46	0.41	0.51	0.45	0.40	0.38					
姿図 	1	0.73	0.62	0.54	0.71	0.61	0.54	0.48	0.59	0.53	0.48	0.58	0.52	0.47	0.45					
	1.25	0.79	0.69	0.61	0.77	0.68	0.61	0.55	0.66	0.60	0.55	0.64	0.59	0.54	0.52					
	1.5	0.83	0.74	0.67	0.81	0.73	0.66	0.61	0.71	0.65	0.60	0.69	0.64	0.60	0.57					
	2	0.89	0.81	0.75	0.87	0.80	0.74	0.69	0.78	0.73	0.68	0.76	0.71	0.68	0.65					
	2.5	0.92	0.86	0.80	0.91	0.84	0.79	0.75	0.82	0.78	0.74	0.80	0.76	0.73	0.70					
	3	0.95	0.89	0.84	0.93	0.88	0.83	0.79	0.85	0.81	0.77	0.83	0.79	0.76	0.74					
	4	0.98	0.93	0.89	0.96	0.92	0.88	0.84	0.89	0.86	0.83	0.87	0.84	0.82	0.79					
光源形式 WGE404NE-N14A	5	1.00	0.96	0.92	0.98	0.95	0.91	0.88	0.92	0.89	0.87	0.90	0.88	0.85	0.82					
器具光束 4,320 lm	7	1.02	1.00	0.97	1.01	0.98	0.96	0.93	0.96	0.94	0.92	0.94	0.92	0.90	0.87					
	10	1.04	1.02	1.01	1.03	1.01	0.99	0.98	0.99	0.97	0.96	0.96	0.95	0.94	0.91					
器具効率 Ft= 100%		単体照度分布(初期値) 																		
上方光束 Fu= 0.6%																				
下方光束 Fd= 99.4%																				
最大取付間隔																				
A-A 1.28 H																				
B-B 1.24 H																				
保守率	良	0.86																		
	中	0.81																		
	否	0.72																		
光度 (cd/1000 lm)		配光曲線 (cd/1000 lm) 																		
A-0	B-B																C-0	A'-0	C'-0	
0	328																328	328		
10	320																322	320		
20	306																305	306		
30	281																274	278		
40	245																234	241		
50	209																194	202		
60	167																142	152		
70	116																85	105		
80	75																33	60		
90	26																	16		
100																				
110																				
120																				
130																				
140																				
150																				
160																				
170																				
180																				

配光曲線
(cd/1000 lm)

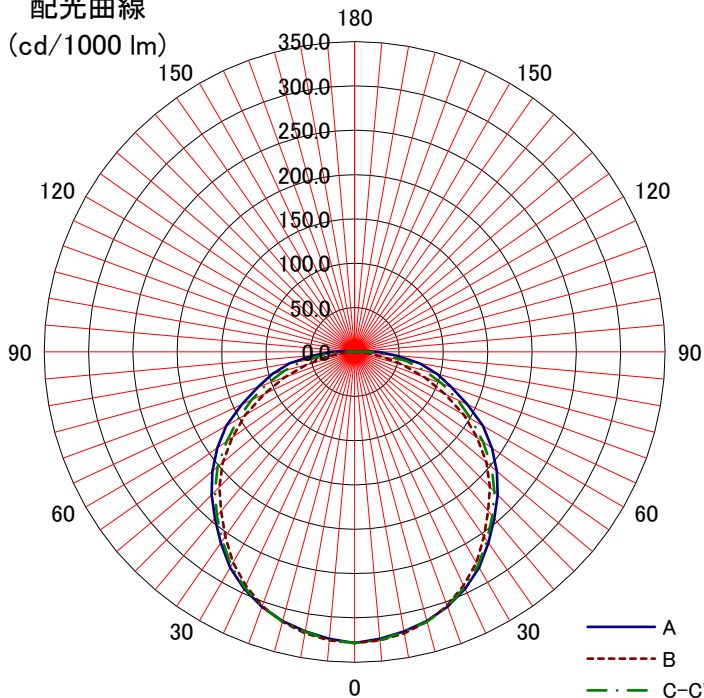