
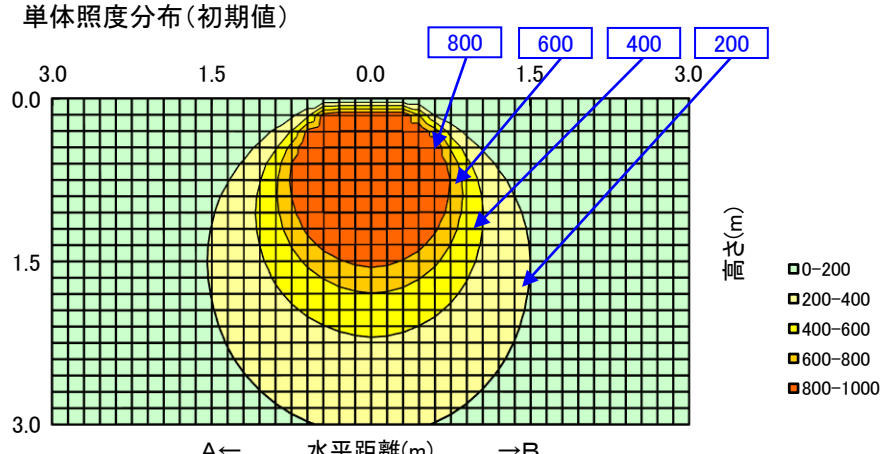
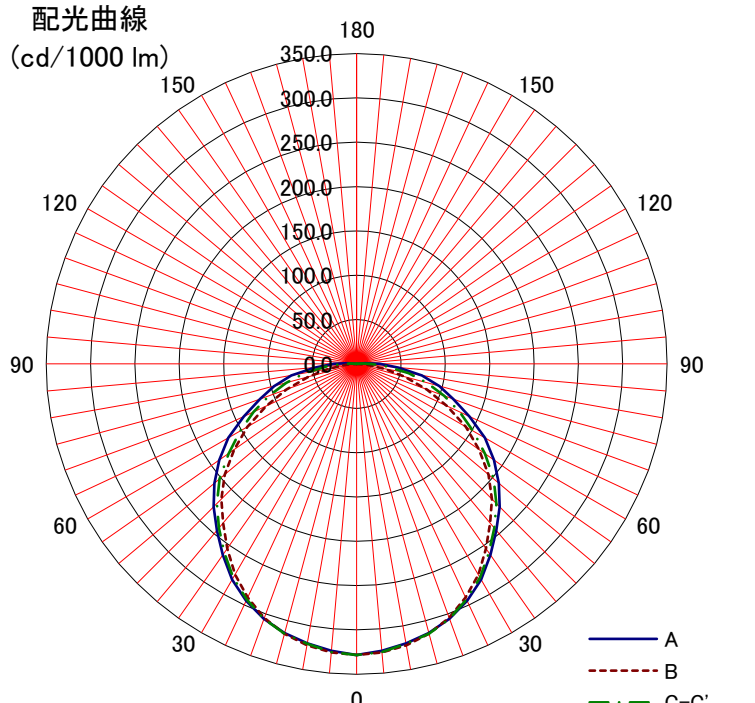
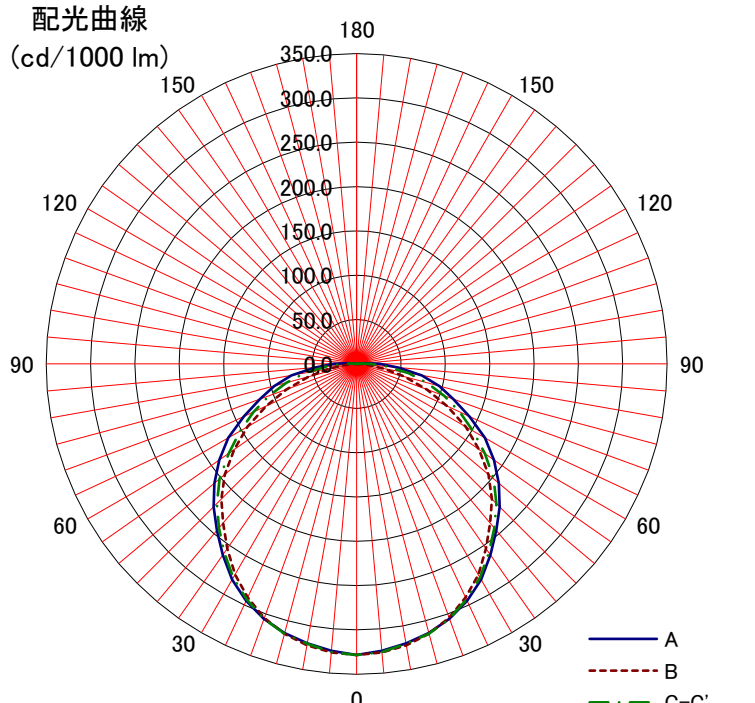


日立照明器具 照明特性

名称: 交換形LED笠付形	反射率	天井	80%			70%				50%			30%			0%			
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%			
		床	10%														0%		
形式: WGP4B	室指数	固有照明率 S/H=1.0																	
<備考> 防湿・防雨形 (オイルミスト対応)	0.6	0.57	0.45	0.37	0.56	0.44	0.37	0.32	0.43	0.36	0.31	0.42	0.36	0.31	0.29				
	0.8	0.67	0.55	0.47	0.65	0.54	0.47	0.41	0.53	0.46	0.41	0.51	0.45	0.40	0.38				
姿図 	1	0.73	0.62	0.54	0.71	0.61	0.54	0.48	0.59	0.53	0.48	0.58	0.52	0.47	0.45				
	1.25	0.79	0.69	0.61	0.77	0.68	0.61	0.55	0.66	0.60	0.55	0.64	0.59	0.54	0.52				
	1.5	0.83	0.74	0.67	0.81	0.73	0.66	0.61	0.71	0.65	0.60	0.69	0.64	0.60	0.57				
	2	0.89	0.81	0.75	0.87	0.80	0.74	0.69	0.78	0.73	0.68	0.76	0.71	0.68	0.65				
	2.5	0.92	0.86	0.80	0.91	0.84	0.79	0.75	0.82	0.78	0.74	0.80	0.76	0.73	0.70				
	3	0.95	0.89	0.84	0.93	0.88	0.83	0.79	0.85	0.81	0.77	0.83	0.79	0.76	0.74				
光源形式 WGE406NE-N14A	4	0.98	0.93	0.89	0.96	0.92	0.88	0.84	0.89	0.86	0.83	0.87	0.84	0.82	0.79				
	5	1.00	0.96	0.92	0.98	0.95	0.91	0.88	0.92	0.89	0.87	0.90	0.88	0.85	0.82				
器具光束 5,890 lm	7	1.02	1.00	0.97	1.01	0.98	0.96	0.93	0.96	0.94	0.92	0.94	0.92	0.90	0.87				
	10	1.04	1.02	1.01	1.03	1.01	0.99	0.98	0.99	0.97	0.96	0.96	0.95	0.94	0.91				
器具効率 Ft= 100%		単体照度分布(初期値) 																	
上方光束 Fu= 0.6%																			
下方光束 Fd= 99.4%																			
最大取付間隔		配光曲線 																	
A-A 1.28 H																			
B-B 1.24 H																			
保守率																			
良	0.86	配光曲線 																	
中	0.81																		
否	0.72																		
光度 (cd/1000 lm)																			
A-0	B-B																C-0	A'-0	C'-0
0	328																328	328	
10	320																322	320	
20	306																305	306	
30	281																274	278	
40	245																234	241	
50	209	194	202																
60	167	142	152																
70	116	85	105																
80	75	33	60																
90	26		16																
100																			
110																			
120																			
130																			
140																			
150																			
160																			
170																			
180																			