
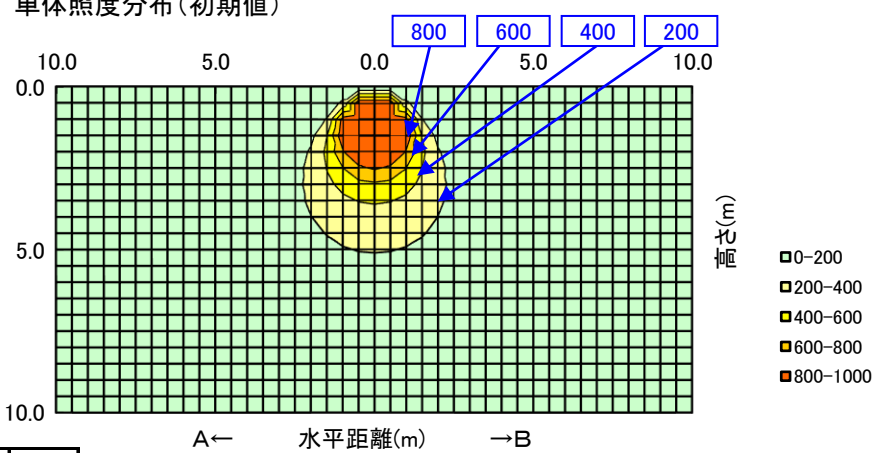
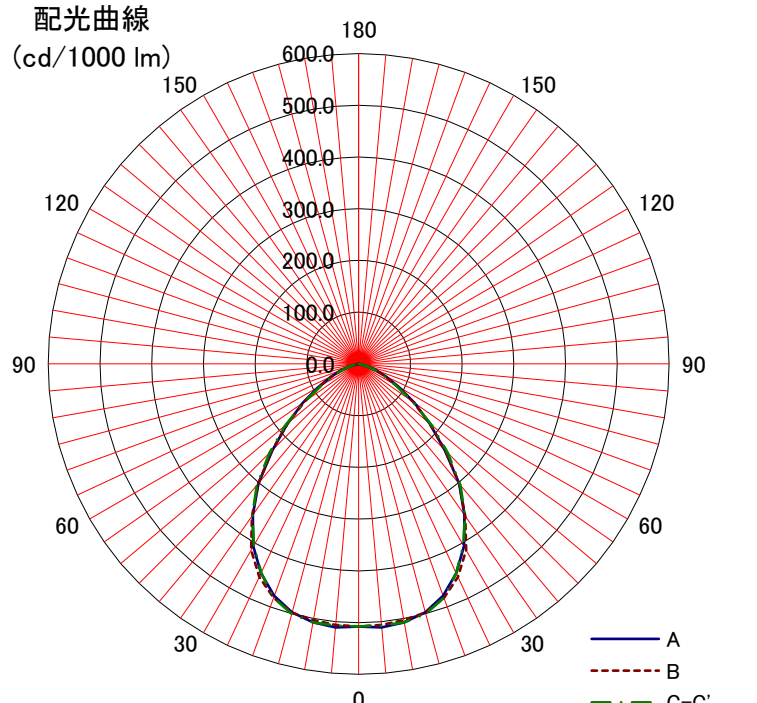


日立照明器具 照明特性																																																																																																																																								
名称: 高天井用LED器具	反射率	天井	80%			70%				50%			30%			0%																																																																																																																								
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%																																																																																																																								
		床	10%													0%																																																																																																																								
形式: WHMTE11AMN-J14B	室指数	固有照明率 S/H=1.0																																																																																																																																						
<備考>	0.6	0.66	0.56	0.49	0.65	0.55	0.49	0.45	0.54	0.49	0.45	0.54	0.48	0.45	0.43																																																																																																																									
	0.8	0.76	0.66	0.60	0.74	0.66	0.60	0.55	0.65	0.59	0.55	0.64	0.59	0.55	0.53																																																																																																																									
姿図 	1	0.82	0.73	0.67	0.80	0.73	0.67	0.63	0.71	0.66	0.62	0.70	0.66	0.62	0.60																																																																																																																									
	1.25	0.87	0.80	0.74	0.86	0.79	0.74	0.69	0.77	0.73	0.69	0.76	0.72	0.68	0.66																																																																																																																									
	1.5	0.91	0.84	0.79	0.89	0.83	0.79	0.75	0.82	0.78	0.74	0.80	0.77	0.74	0.72																																																																																																																									
	2	0.95	0.90	0.86	0.94	0.89	0.85	0.82	0.87	0.84	0.81	0.86	0.83	0.80	0.78																																																																																																																									
	2.5	0.98	0.93	0.90	0.97	0.92	0.89	0.86	0.91	0.88	0.85	0.89	0.86	0.84	0.82																																																																																																																									
	3	1.00	0.96	0.92	0.98	0.95	0.91	0.89	0.93	0.90	0.88	0.91	0.88	0.86	0.84																																																																																																																									
光源形式	4	1.02	0.99	0.96	1.00	0.98	0.95	0.93	0.96	0.93	0.91	0.94	0.92	0.90	0.88																																																																																																																									
-	5	1.03	1.01	0.98	1.02	1.00	0.98	0.96	0.98	0.96	0.94	0.96	0.94	0.93	0.90																																																																																																																									
器具光束	7	1.05	1.03	1.02	1.04	1.02	1.01	0.99	1.00	0.99	0.98	0.98	0.97	0.96	0.94																																																																																																																									
9,100 lm	10	1.07	1.06	1.05	1.05	1.05	1.04	1.03	1.02	1.02	1.01	1.00	1.00	0.99	0.96																																																																																																																									
器具効率 Ft= 100%		単体照度分布(初期値) 																																																																																																																																						
上方光束 Fu= 0%																																																																																																																																								
下方光束 Fd= 100%																																																																																																																																								
最大取付間隔		配光曲線 (cd/1000 lm) 																																																																																																																																						
A-A 1.20 H																																																																																																																																								
B-B 1.22 H																																																																																																																																								
保守率	良																0.83																																																																																																																							
	中																0.81																																																																																																																							
	否																0.76																																																																																																																							
光度 (cd/1000 lm)																	<table><tr><th></th><th>A-0</th><th>B-B</th><th>C-0</th><th>A'-0</th><th>C'-0</th></tr><tr><td>0</td><td>508</td><td>508</td><td>508</td><td></td><td></td></tr><tr><td>10</td><td>508</td><td>503</td><td>508</td><td></td><td></td></tr><tr><td>20</td><td>477</td><td>481</td><td>481</td><td></td><td></td></tr><tr><td>30</td><td>407</td><td>416</td><td>405</td><td></td><td></td></tr><tr><td>40</td><td>302</td><td>302</td><td>306</td><td></td><td></td></tr><tr><td>50</td><td>179</td><td>179</td><td>186</td><td></td><td></td></tr><tr><td>60</td><td>92</td><td>88</td><td>83</td><td></td><td></td></tr><tr><td>70</td><td>35</td><td>35</td><td>31</td><td></td><td></td></tr><tr><td>80</td><td>4</td><td>9</td><td>7</td><td></td><td></td></tr><tr><td>90</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>100</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>110</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>120</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>130</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>140</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>150</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>160</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>170</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>180</td><td></td><td></td><td></td><td></td><td></td></tr></table>																A-0	B-B	C-0	A'-0	C'-0	0	508	508	508			10	508	503	508			20	477	481	481			30	407	416	405			40	302	302	306			50	179	179	186			60	92	88	83			70	35	35	31			80	4	9	7			90						100						110						120						130						140						150						160		
	A-0	B-B	C-0	A'-0	C'-0																																																																																																																																			
0	508	508	508																																																																																																																																					
10	508	503	508																																																																																																																																					
20	477	481	481																																																																																																																																					
30	407	416	405																																																																																																																																					
40	302	302	306																																																																																																																																					
50	179	179	186																																																																																																																																					
60	92	88	83																																																																																																																																					
70	35	35	31																																																																																																																																					
80	4	9	7																																																																																																																																					
90																																																																																																																																								
100																																																																																																																																								
110																																																																																																																																								
120																																																																																																																																								
130																																																																																																																																								
140																																																																																																																																								
150																																																																																																																																								
160																																																																																																																																								
170																																																																																																																																								
180																																																																																																																																								