
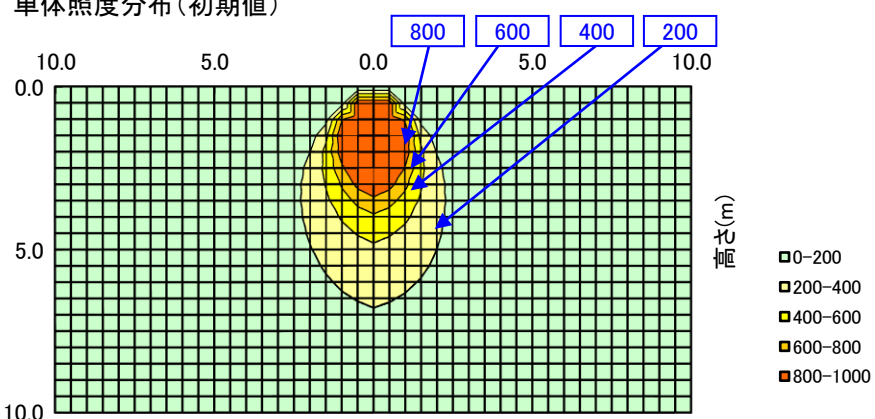
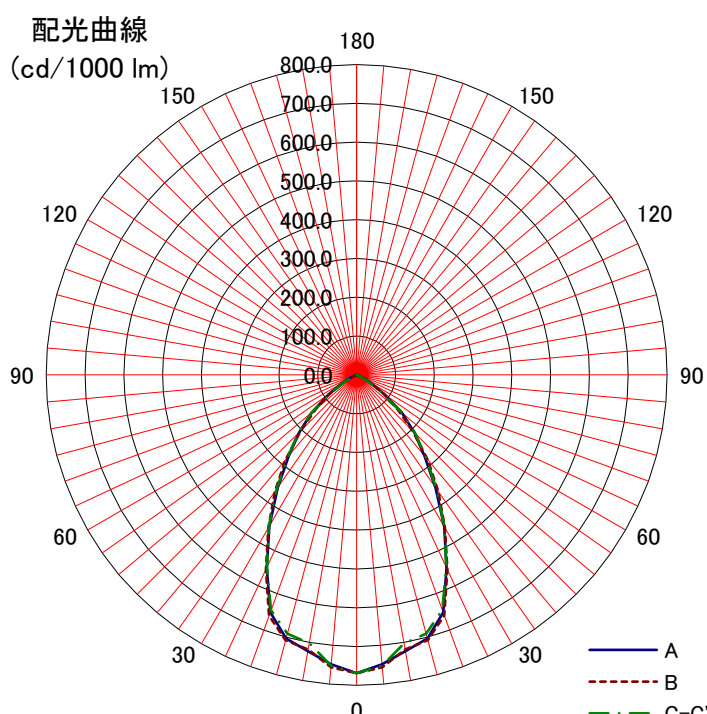


日立照明器具 照明特性

名称: 高天井用LED器具		反射率	天井	80%			70%				50%			30%			0%
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
形式: WHMTE11ANN-J14B		室指数	床	10%													0%
			固有照明率 S/H=1.0														
<備考>		0.6	0.74	0.66	0.60	0.73	0.65	0.60	0.56	0.64	0.59	0.56	0.63	0.59	0.56	0.55	
		0.8	0.83	0.75	0.70	0.82	0.75	0.70	0.66	0.74	0.69	0.66	0.73	0.69	0.66	0.64	
姿図 		1	0.88	0.81	0.76	0.87	0.81	0.76	0.72	0.79	0.75	0.72	0.78	0.75	0.72	0.70	
		1.25	0.92	0.86	0.82	0.91	0.86	0.81	0.78	0.84	0.81	0.78	0.83	0.80	0.77	0.76	
		1.5	0.95	0.90	0.86	0.94	0.89	0.86	0.83	0.88	0.85	0.82	0.87	0.84	0.81	0.80	
		2	0.99	0.95	0.92	0.98	0.94	0.91	0.88	0.93	0.90	0.88	0.91	0.89	0.87	0.85	
		2.5	1.01	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.91	0.93	0.91	0.90	0.87	
		3	1.02	0.99	0.97	1.01	0.98	0.96	0.94	0.96	0.94	0.92	0.95	0.93	0.91	0.89	
光源形式 -		4	1.04	1.02	0.99	1.03	1.01	0.99	0.97	0.99	0.97	0.95	0.97	0.95	0.94	0.92	
		5	1.05	1.03	1.01	1.04	1.02	1.01	0.99	1.00	0.99	0.98	0.98	0.97	0.96	0.94	
器具光束 9,300 lm		7	1.07	1.05	1.04	1.06	1.04	1.03	1.02	1.02	1.01	1.01	1.00	1.00	0.99	0.96	
		10	1.08	1.07	1.07	1.07	1.06	1.06	1.05	1.04	1.04	1.03	1.02	1.02	1.01	0.98	
器具効率 Ft= 100%			単体照度分布(初期値) 														
上方光束 Fu= 0%																	
下方光束 Fd= 100%																	
最大取付間隔			配光曲線 (cd/1000 lm) 														
A-A 0.86 H																	
B-B 0.88 H																	
保守率	良	0.83															
	中	0.81															
	否	0.76															
光度 (cd/1000 lm)																	
	A-0	B-B	C-0	A'-0	C'-0												
0	769	769	769														
10	723	718	703														
20	651	660	645														
30	451	455	453														
40	272	286	277														
50	152	138	152														
60	45	45	36														
70	4		2														
80																	
90																	
100																	
110																	
120																	
130																	
140																	
150																	
160																	
170																	
180																	