
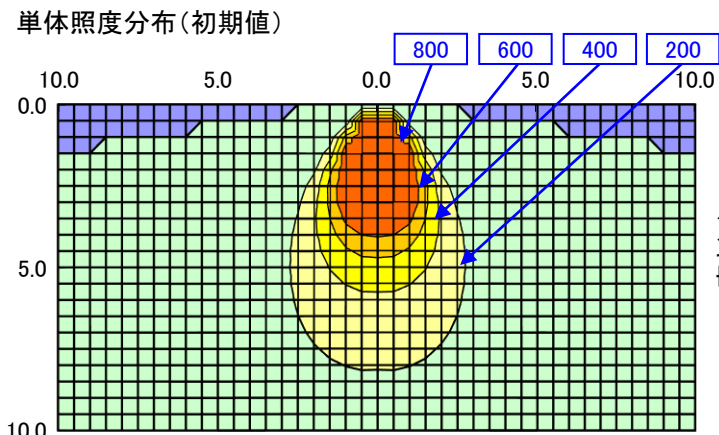
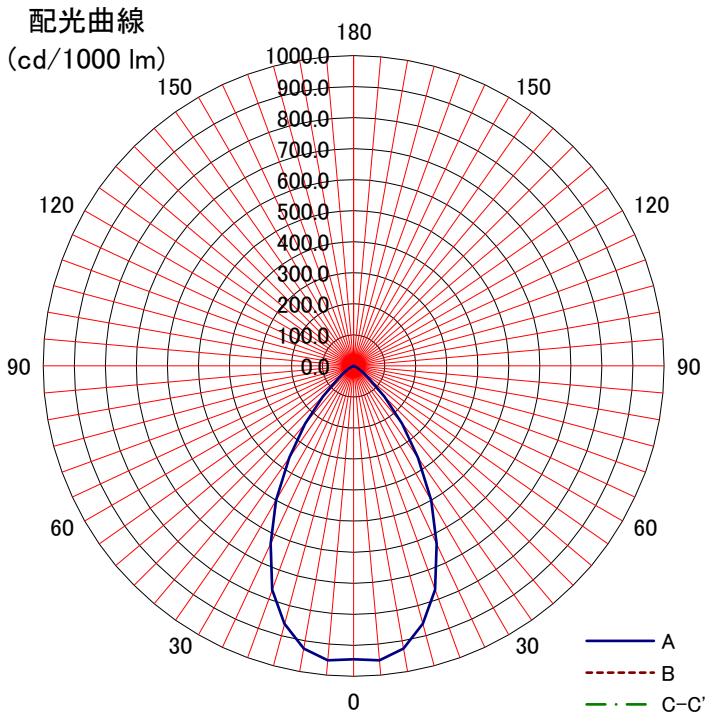


日立照明器具 照明特性

名称: 高天井用LED器具	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: WHMTE1403NN-J14	室指数	固有照明率 S/H=1.0														
<備考>	0.6	0.80	0.73	0.69	0.79	0.73	0.69	0.66	0.72	0.68	0.65	0.71	0.68	0.65	0.64	
	0.8	0.88	0.82	0.77	0.87	0.81	0.77	0.74	0.80	0.77	0.74	0.79	0.76	0.74	0.72	
	1	0.92	0.86	0.83	0.91	0.86	0.82	0.79	0.85	0.82	0.79	0.84	0.81	0.79	0.77	
姿図 	1.25	0.95	0.91	0.87	0.94	0.90	0.87	0.84	0.89	0.86	0.84	0.88	0.85	0.83	0.82	
	1.5	0.98	0.94	0.91	0.97	0.93	0.90	0.88	0.92	0.89	0.87	0.90	0.88	0.86	0.85	
	2	1.01	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.91	0.94	0.92	0.91	0.89	
	2.5	1.02	1.00	0.97	1.01	0.99	0.97	0.95	0.97	0.95	0.94	0.96	0.94	0.93	0.91	
	3	1.03	1.01	0.99	1.02	1.00	0.98	0.96	0.98	0.97	0.95	0.97	0.95	0.94	0.92	
	4	1.05	1.03	1.01	1.04	1.02	1.00	0.99	1.00	0.98	0.97	0.98	0.97	0.96	0.94	
光源形式 —	5	1.06	1.04	1.03	1.04	1.03	1.02	1.00	1.01	1.00	0.99	0.99	0.98	0.97	0.95	
器具光束 14,000 lm	7	1.07	1.06	1.05	1.06	1.05	1.04	1.03	1.03	1.02	1.01	1.01	1.00	1.00	0.97	
	10	1.08	1.07	1.07	1.07	1.06	1.06	1.05	1.04	1.04	1.03	1.02	1.02	1.02	0.99	
器具効率 Ft= 100%		 単位照度分布(初期値)														
上方光束 Fu= 0%																
下方光束 Fd= 100%																
最大取付間隔		 配光曲線 (cd/1000 lm)														
A-A 0.94 H																
B-B H																
保守率	良 0.81 中 0.79 否 0.75															
光度 (cd/1000 lm)																
	A-0	B-B	C-0	A'-0	C'-0											
0	945															
10	925															
20	768															
30	500															
40	243															
50	68															
60	17															
70	3															
80																
90																
100																
110																
120																
130																
140																
150																
160																
170																
180																