
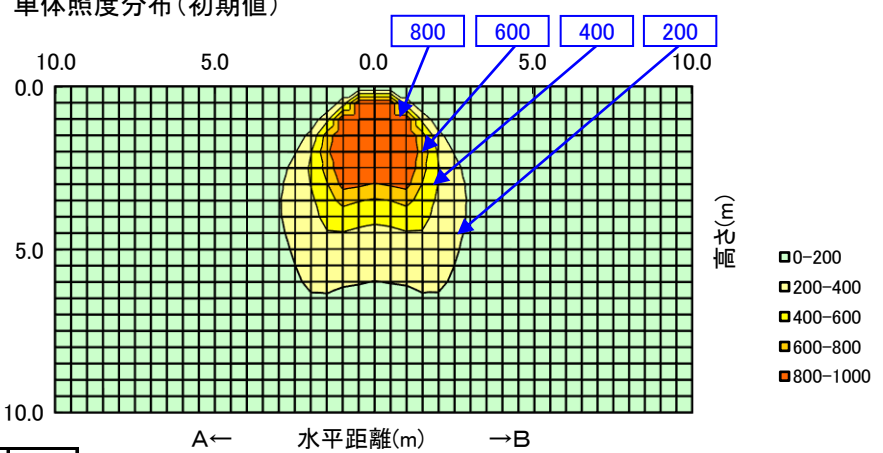


日立照明器具 照明特性

名称: 高天井用LED器具	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: WHMTE1903MN-J14A	室指数	固有照明率 S/H=1.0														
<備考>	0.6	0.67	0.57	0.51	0.66	0.57	0.51	0.46	0.56	0.50	0.46	0.55	0.50	0.46	0.44	
	0.8	0.77	0.68	0.62	0.76	0.67	0.62	0.57	0.66	0.61	0.57	0.65	0.60	0.57	0.55	
姿図 	1	0.83	0.75	0.69	0.82	0.74	0.69	0.65	0.73	0.68	0.64	0.72	0.67	0.64	0.62	
	1.25	0.88	0.81	0.76	0.87	0.80	0.75	0.72	0.79	0.75	0.71	0.78	0.74	0.71	0.69	
	1.5	0.92	0.86	0.81	0.91	0.85	0.80	0.77	0.83	0.79	0.76	0.82	0.78	0.76	0.74	
	2	0.96	0.92	0.88	0.95	0.91	0.87	0.84	0.89	0.86	0.83	0.87	0.85	0.82	0.80	
	2.5	0.99	0.95	0.91	0.98	0.94	0.90	0.88	0.92	0.89	0.87	0.90	0.88	0.86	0.84	
	3	1.00	0.97	0.94	0.99	0.96	0.93	0.90	0.94	0.91	0.89	0.92	0.90	0.88	0.86	
	4	1.02	1.00	0.97	1.01	0.99	0.96	0.94	0.97	0.94	0.93	0.95	0.93	0.91	0.89	
光源形式 -	5	1.04	1.02	0.99	1.03	1.00	0.99	0.97	0.98	0.97	0.95	0.96	0.95	0.94	0.91	
器具光束 17,000 lm	7	1.06	1.04	1.03	1.05	1.03	1.02	1.00	1.01	1.00	0.99	0.99	0.98	0.97	0.95	
	10	1.07	1.06	1.05	1.06	1.05	1.04	1.03	1.03	1.02	1.02	1.01	1.00	1.00	0.97	
器具効率 Ft= 100%		単体照度分布(初期値) 														
上方光束 Fu= 0%																
下方光束 Fd= 100%																
最大取付間隔																
A-A 1.38 H																
B-B 1.34 H																
保守率	良	0.81														
	中	0.79														
	否	0.75														
光度 (cd/1000 lm)																
	A-0	B-B	C-0	A'-0	C'-0											
0	419	419	419													
10	468	461	458													
20	541	541	525													
30	399	399	401													
40	324	307	308													
50	203	203	204													
60	82	82	99													
70	11	9	10													
80	1	1	1													
90																
100																
110																
120																
130																
140																
150																
160																
170																
180																

配光曲線 (cd/1000 lm)		180		150		120		90		60		30		0		A		B		C-C'	
		600.0		500.0		400.0		300.0		200.0		100.0		0.0							
		150		120		90		60		30		0		30							
		180		150		120		90		60		30		0							
		150		120		90		60		30		0		30							
		120		90		60		30		0		30		60							
		90		60		30		0		30		60		90							
		60		30		0		30		60		90		120							
		30		0		30		60		90		120		150							
		0		30		60		90		120		150		180							