
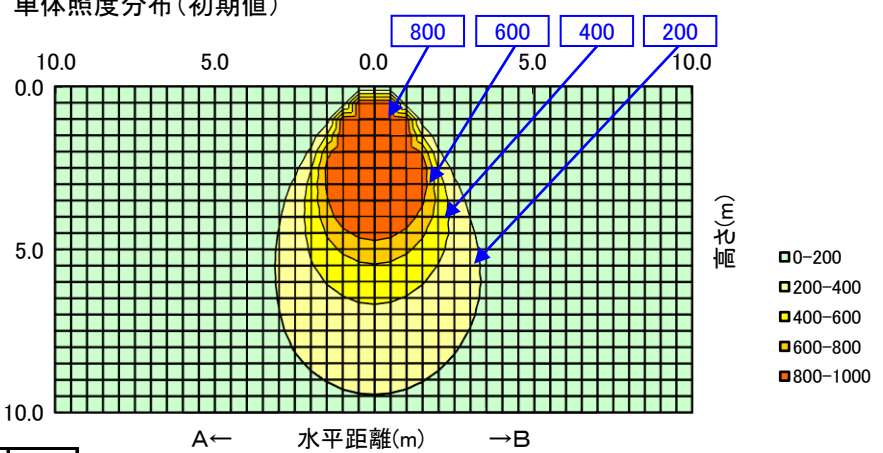
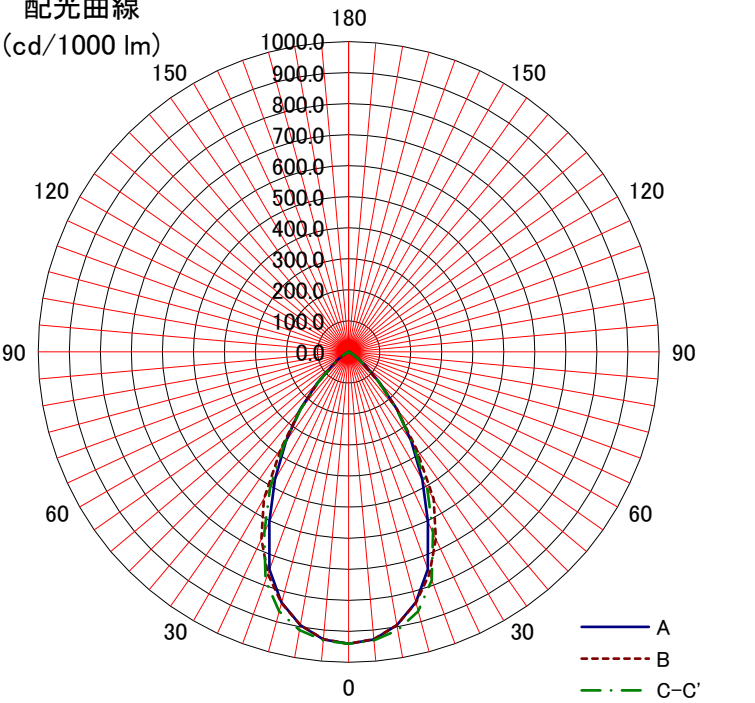


日立照明器具 照明特性

名称: 高天井用LED器具		反射率	天井 壁 床	80%			70%				50%			30%			0%
				70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
形式: WHMTE1903NN-J14A		室指数	固有照明率 S/H=1.0														
			10%														
<備考>		0.6	0.80	0.73	0.69	0.79	0.73	0.68	0.65	0.72	0.68	0.65	0.71	0.68	0.65	0.64	
		0.8	0.87	0.81	0.77	0.87	0.81	0.77	0.74	0.80	0.76	0.74	0.79	0.76	0.73	0.72	
姿図 		1	0.92	0.86	0.82	0.91	0.86	0.82	0.79	0.85	0.81	0.79	0.84	0.81	0.78	0.77	
		1.25	0.95	0.90	0.87	0.94	0.90	0.86	0.84	0.89	0.86	0.83	0.87	0.85	0.83	0.81	
		1.5	0.98	0.94	0.90	0.97	0.93	0.90	0.87	0.91	0.89	0.87	0.90	0.88	0.86	0.85	
		2	1.01	0.97	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.91	0.94	0.92	0.90	0.88	
		2.5	1.02	0.99	0.97	1.01	0.98	0.96	0.94	0.97	0.95	0.93	0.95	0.94	0.92	0.90	
		3	1.03	1.01	0.98	1.02	1.00	0.98	0.96	0.98	0.96	0.95	0.96	0.95	0.94	0.92	
光源形式 -		4	1.04	1.02	1.01	1.03	1.01	1.00	0.98	1.00	0.98	0.97	0.98	0.97	0.96	0.93	
		5	1.05	1.04	1.02	1.04	1.03	1.01	1.00	1.01	1.00	0.99	0.99	0.98	0.97	0.95	
器具光束 19,000 lm		7	1.07	1.06	1.05	1.06	1.05	1.04	1.03	1.03	1.02	1.01	1.01	1.00	1.00	0.97	
		10	1.08	1.07	1.07	1.07	1.06	1.06	1.05	1.04	1.04	1.03	1.02	1.02	1.01	0.99	
器具効率 Ft= 100%		単体照度分布(初期値) 															
上方光束 Fu= 0%																	
下方光束 Fd= 100%																	
最大取付間隔		A← 水平距離(m) →B 配光曲線 (cd/1000 lm) 															
A-A 0.92 H																	
B-B 0.98 H																	
保守率	良	0.81															
	中	0.79															
	否	0.75															
光度 (cd/1000 lm)																	
	A-0	B-B	C-0	A'-0	C'-0												
0	940	940	940														
10	894	894	910														
20	745	761	784														
30	474	547	506														
40	245	243	240														
50	73	63	65														
60	17	15	14														
70	4	4	4														
80	1	1	1														
90																	
100																	
110																	
120																	
130																	
140																	
150																	
160																	
170																	
180																	