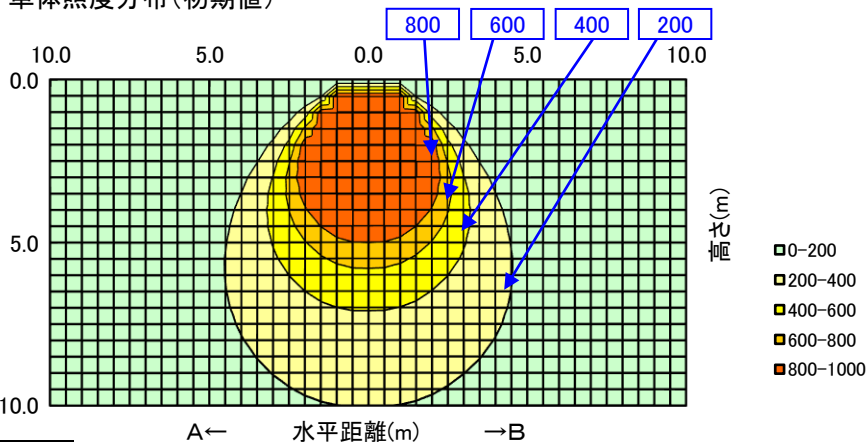
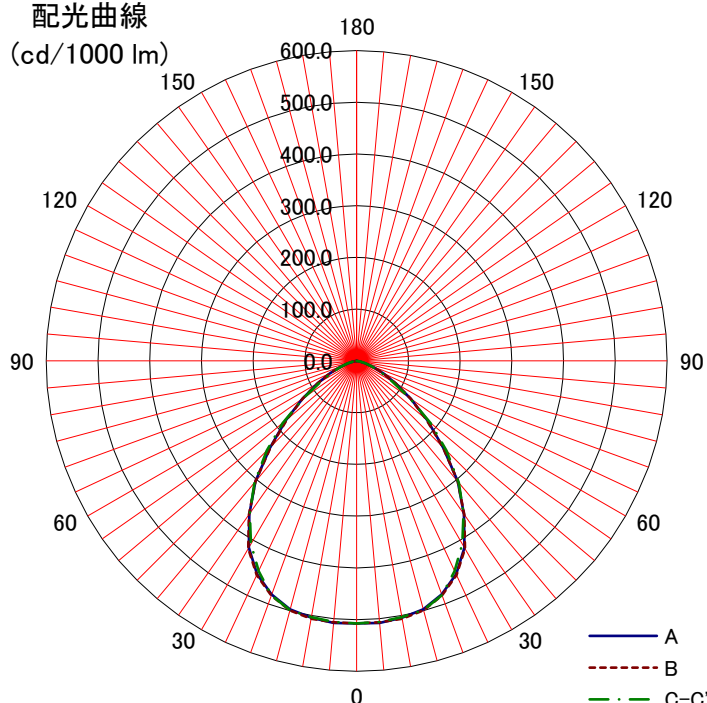


日立照明器具 照明特性																																																																																																																																								
名称: 高天井用LED器具	反射率	天井	80%			70%				50%			30%			0%																																																																																																																								
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%																																																																																																																								
形式: WHMTE22BMN-J14A		床	10%													0%																																																																																																																								
室指数 固有照明率 S/H=1.0 <備考> 姿図 光源形式 器具光束 19,000 lm	室指数	固有照明率 S/H=1.0																																																																																																																																						
	0.6	0.65	0.55	0.48	0.64	0.54	0.48	0.43	0.53	0.47	0.43	0.52	0.47	0.43	0.41																																																																																																																									
	0.8	0.75	0.65	0.59	0.73	0.65	0.58	0.54	0.63	0.58	0.54	0.62	0.57	0.53	0.52																																																																																																																									
	1	0.81	0.72	0.66	0.79	0.71	0.66	0.61	0.70	0.65	0.61	0.69	0.64	0.60	0.59																																																																																																																									
	1.25	0.86	0.78	0.73	0.85	0.78	0.72	0.68	0.76	0.71	0.67	0.75	0.70	0.67	0.65																																																																																																																									
	1.5	0.90	0.83	0.78	0.88	0.82	0.77	0.73	0.81	0.76	0.73	0.79	0.75	0.72	0.70																																																																																																																									
	2	0.95	0.89	0.85	0.93	0.88	0.84	0.81	0.86	0.83	0.80	0.85	0.82	0.79	0.77																																																																																																																									
	2.5	0.97	0.93	0.89	0.96	0.92	0.88	0.85	0.90	0.87	0.84	0.88	0.85	0.83	0.81																																																																																																																									
	3	0.99	0.95	0.91	0.98	0.94	0.91	0.88	0.92	0.89	0.87	0.90	0.88	0.85	0.83																																																																																																																									
	4	1.01	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.90	0.93	0.91	0.89	0.87																																																																																																																									
5	1.03	1.00	0.98	1.01	0.99	0.97	0.95	0.97	0.95	0.93	0.95	0.93	0.92	0.89																																																																																																																										
7	1.05	1.03	1.01	1.04	1.02	1.00	0.99	1.00	0.98	0.97	0.98	0.97	0.96	0.93																																																																																																																										
10	1.06	1.05	1.04	1.05	1.04	1.03	1.02	1.02	1.01	1.00	1.00	0.99	0.99	0.96																																																																																																																										
器具効率 Ft= 100%		単体照度分布(初期値) 																																																																																																																																						
上方光束 Fu= 0%																																																																																																																																								
下方光束 Fd= 100%																																																																																																																																								
最大取付間隔		配光曲線 (cd/1000 lm) 																																																																																																																																						
A-A 1.22 H																																																																																																																																								
B-B 1.24 H																																																																																																																																								
保守率	良	0.83																																																																																																																																						
	中	0.81																																																																																																																																						
	否	0.76																																																																																																																																						
光度 (cd/1000 lm)		<table><tr><th></th><th>A-0</th><th>B-B</th><th>C-0</th><th>A'-0</th><th>C'-0</th></tr><tr><td>0</td><td>507</td><td>507</td><td>507</td><td></td><td></td></tr><tr><td>10</td><td>504</td><td>506</td><td>503</td><td></td><td></td></tr><tr><td>20</td><td>481</td><td>483</td><td>482</td><td></td><td></td></tr><tr><td>30</td><td>417</td><td>419</td><td>408</td><td></td><td></td></tr><tr><td>40</td><td>304</td><td>304</td><td>307</td><td></td><td></td></tr><tr><td>50</td><td>179</td><td>176</td><td>187</td><td></td><td></td></tr><tr><td>60</td><td>87</td><td>87</td><td>79</td><td></td><td></td></tr><tr><td>70</td><td>34</td><td>34</td><td>32</td><td></td><td></td></tr><tr><td>80</td><td>6</td><td>6</td><td>6</td><td></td><td></td></tr><tr><td>90</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>100</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>110</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>120</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>130</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>140</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>150</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>160</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>170</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>180</td><td></td><td></td><td></td><td></td><td></td></tr></table>																A-0	B-B	C-0	A'-0	C'-0	0	507	507	507			10	504	506	503			20	481	483	482			30	417	419	408			40	304	304	307			50	179	176	187			60	87	87	79			70	34	34	32			80	6	6	6			90						100						110						120						130						140						150						160						170						180					
	A-0	B-B	C-0	A'-0	C'-0																																																																																																																																			
0	507	507	507																																																																																																																																					
10	504	506	503																																																																																																																																					
20	481	483	482																																																																																																																																					
30	417	419	408																																																																																																																																					
40	304	304	307																																																																																																																																					
50	179	176	187																																																																																																																																					
60	87	87	79																																																																																																																																					
70	34	34	32																																																																																																																																					
80	6	6	6																																																																																																																																					
90																																																																																																																																								
100																																																																																																																																								
110																																																																																																																																								
120																																																																																																																																								
130																																																																																																																																								
140																																																																																																																																								
150																																																																																																																																								
160																																																																																																																																								
170																																																																																																																																								
180																																																																																																																																								