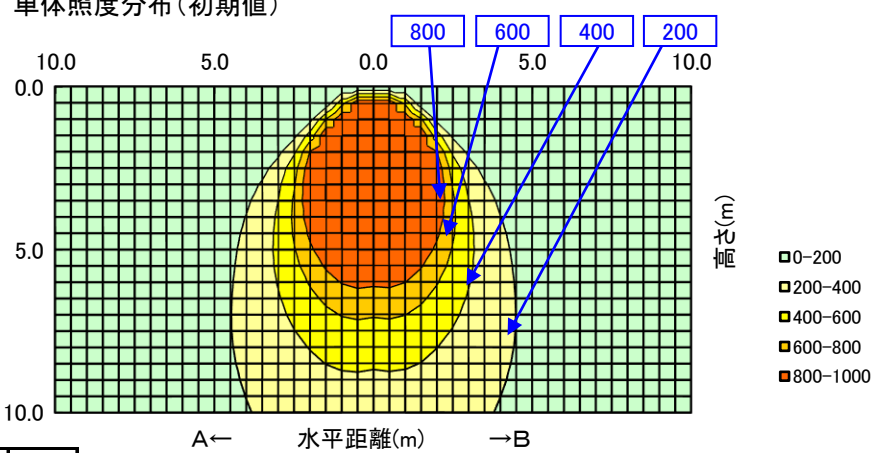
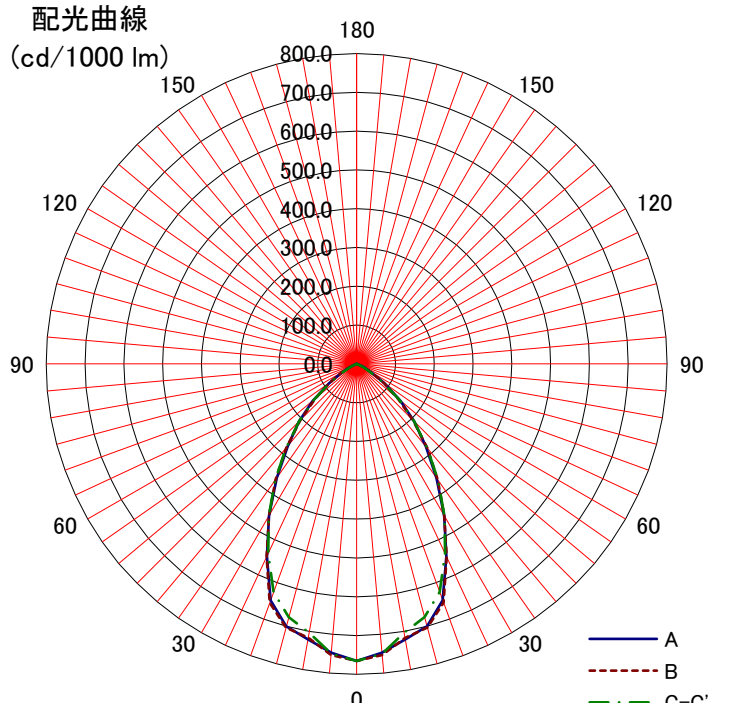


日立照明器具 照明特性

名称: 高天井用LED器具	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: WHMTE22BNN-J14A	室指数	固有照明率 S/H=1.0														
＜備考＞	0.6	0.72	0.64	0.58	0.71	0.63	0.58	0.54	0.62	0.57	0.54	0.61	0.57	0.54	0.52	
	0.8	0.81	0.73	0.68	0.80	0.73	0.68	0.64	0.72	0.67	0.64	0.71	0.67	0.63	0.62	
姿図	1	0.86	0.79	0.74	0.85	0.79	0.74	0.70	0.77	0.73	0.70	0.76	0.73	0.70	0.68	
	1.25	0.91	0.85	0.80	0.90	0.84	0.80	0.76	0.82	0.79	0.76	0.81	0.78	0.75	0.73	
	1.5	0.94	0.88	0.84	0.93	0.88	0.84	0.81	0.86	0.83	0.80	0.85	0.82	0.79	0.78	
	2	0.98	0.93	0.90	0.97	0.93	0.89	0.87	0.91	0.88	0.86	0.89	0.87	0.85	0.83	
	2.5	1.00	0.96	0.93	0.99	0.95	0.92	0.90	0.93	0.91	0.89	0.92	0.90	0.88	0.86	
	3	1.01	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.91	0.93	0.91	0.90	0.88	
光源形式	4	1.03	1.00	0.98	1.02	0.99	0.97	0.95	0.97	0.95	0.94	0.95	0.94	0.93	0.90	
	5	1.04	1.02	1.00	1.03	1.01	0.99	0.98	0.99	0.97	0.96	0.97	0.96	0.95	0.92	
器具光束 19,000 lm	7	1.06	1.04	1.03	1.04	1.03	1.02	1.01	1.01	1.00	0.99	0.99	0.98	0.98	0.95	
	10	1.07	1.06	1.05	1.06	1.05	1.04	1.04	1.03	1.02	1.02	1.01	1.00	1.00	0.97	
器具効率 Ft= 100%		単体照度分布(初期値) 														
上方光束 Fu= 0%																
下方光束 Fd= 100%																
最大取付間隔		A← 水平距離(m) →B 配光曲線 (cd/1000 lm) 														
A-A 1.00 H																
B-B 1.00 H																
保守率	良	0.83														
	中	0.81														
	否	0.76														
光度 (cd/1000 lm)																
	A-0	B-B	C-0	A'-0	C'-0											
0	766	766	766													
10	721	717	704													
20	648	655	625													
30	451	451	454													
40	277	283	284													
50	148	139	144													
60	44	46	39													
70	7	7	3													
80																
90																
100																
110																
120																
130																
140																
150																
160																
170																
180																