
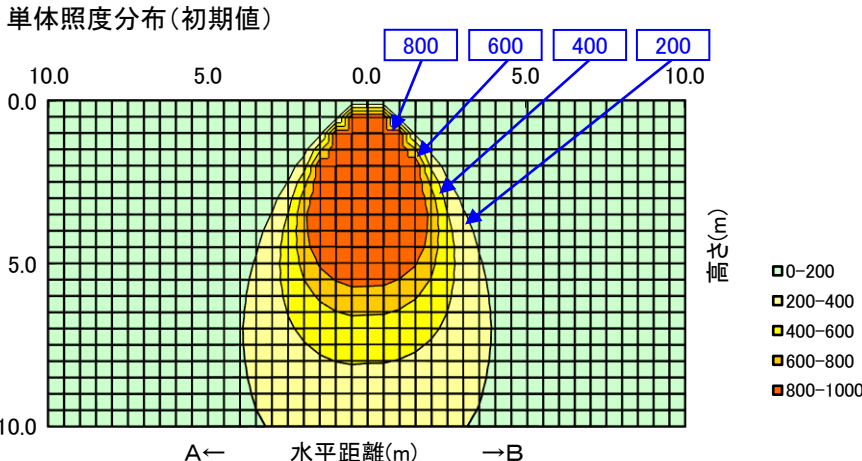


日立照明器具 照明特性

名称: 高天井用LED器具	天井 反射率	80%			70%				50%			30%			0%		
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
形式: WHMTE2801NN-J24A	床 室指数	10%															0%
		固有照明率 S/H=1.0															
＜備考＞	0.6	0.80	0.73	0.69	0.79	0.73	0.69	0.66	0.72	0.68	0.65	0.71	0.68	0.65	0.64		
	0.8	0.87	0.81	0.77	0.86	0.81	0.77	0.74	0.80	0.76	0.74	0.79	0.76	0.74	0.72		
姿図 	1	0.92	0.86	0.82	0.91	0.86	0.82	0.79	0.85	0.81	0.79	0.84	0.81	0.78	0.77		
	1.25	0.95	0.90	0.87	0.94	0.90	0.86	0.84	0.88	0.86	0.83	0.87	0.85	0.83	0.81		
	1.5	0.97	0.93	0.90	0.96	0.93	0.90	0.87	0.91	0.89	0.87	0.90	0.88	0.86	0.84		
	2	1.00	0.97	0.94	0.99	0.96	0.94	0.92	0.95	0.93	0.91	0.93	0.92	0.90	0.88		
	2.5	1.02	0.99	0.97	1.01	0.98	0.96	0.94	0.97	0.95	0.93	0.95	0.93	0.92	0.90		
	3	1.03	1.00	0.98	1.02	0.99	0.97	0.96	0.98	0.96	0.95	0.96	0.95	0.93	0.91		
光源形式 —	4	1.04	1.02	1.00	1.03	1.01	1.00	0.98	0.99	0.98	0.97	0.98	0.96	0.95	0.93		
	5	1.05	1.03	1.02	1.04	1.02	1.01	1.00	1.01	0.99	0.98	0.99	0.98	0.97	0.95		
器具光束 28,000 lm	7	1.06	1.05	1.04	1.05	1.04	1.03	1.03	1.02	1.02	1.01	1.00	1.00	0.99	0.97		
	10	1.07	1.07	1.06	1.06	1.06	1.05	1.05	1.04	1.03	1.03	1.02	1.01	1.01	0.98		
器具効率 Ft= 100%		単体照度分布 (初期値) 															
上方光束 Fu= 0%																	
下方光束 Fd= 100%																	
最大取付間隔																	
A-A 0.96 H																	
B-B 0.96 H																	
保守率	良	0.81															
	中	0.79															
	否	0.75															
光度 (cd/1000 lm)																	
	A-0	B-B	C-0	A'-0	C'-0												
0	930	930	930														
10	926	907	911														
20	784	773	785														
30	504	496	499														
40	223	233	224														
50	66	79	73														
60	15	15	16														
70	3	5	4														
80	1	1	1														
90																	
100																	
110																	
120																	
130																	
140																	
150																	
160																	
170																	
180																	
配光曲線 (cd/1000 lm)		